



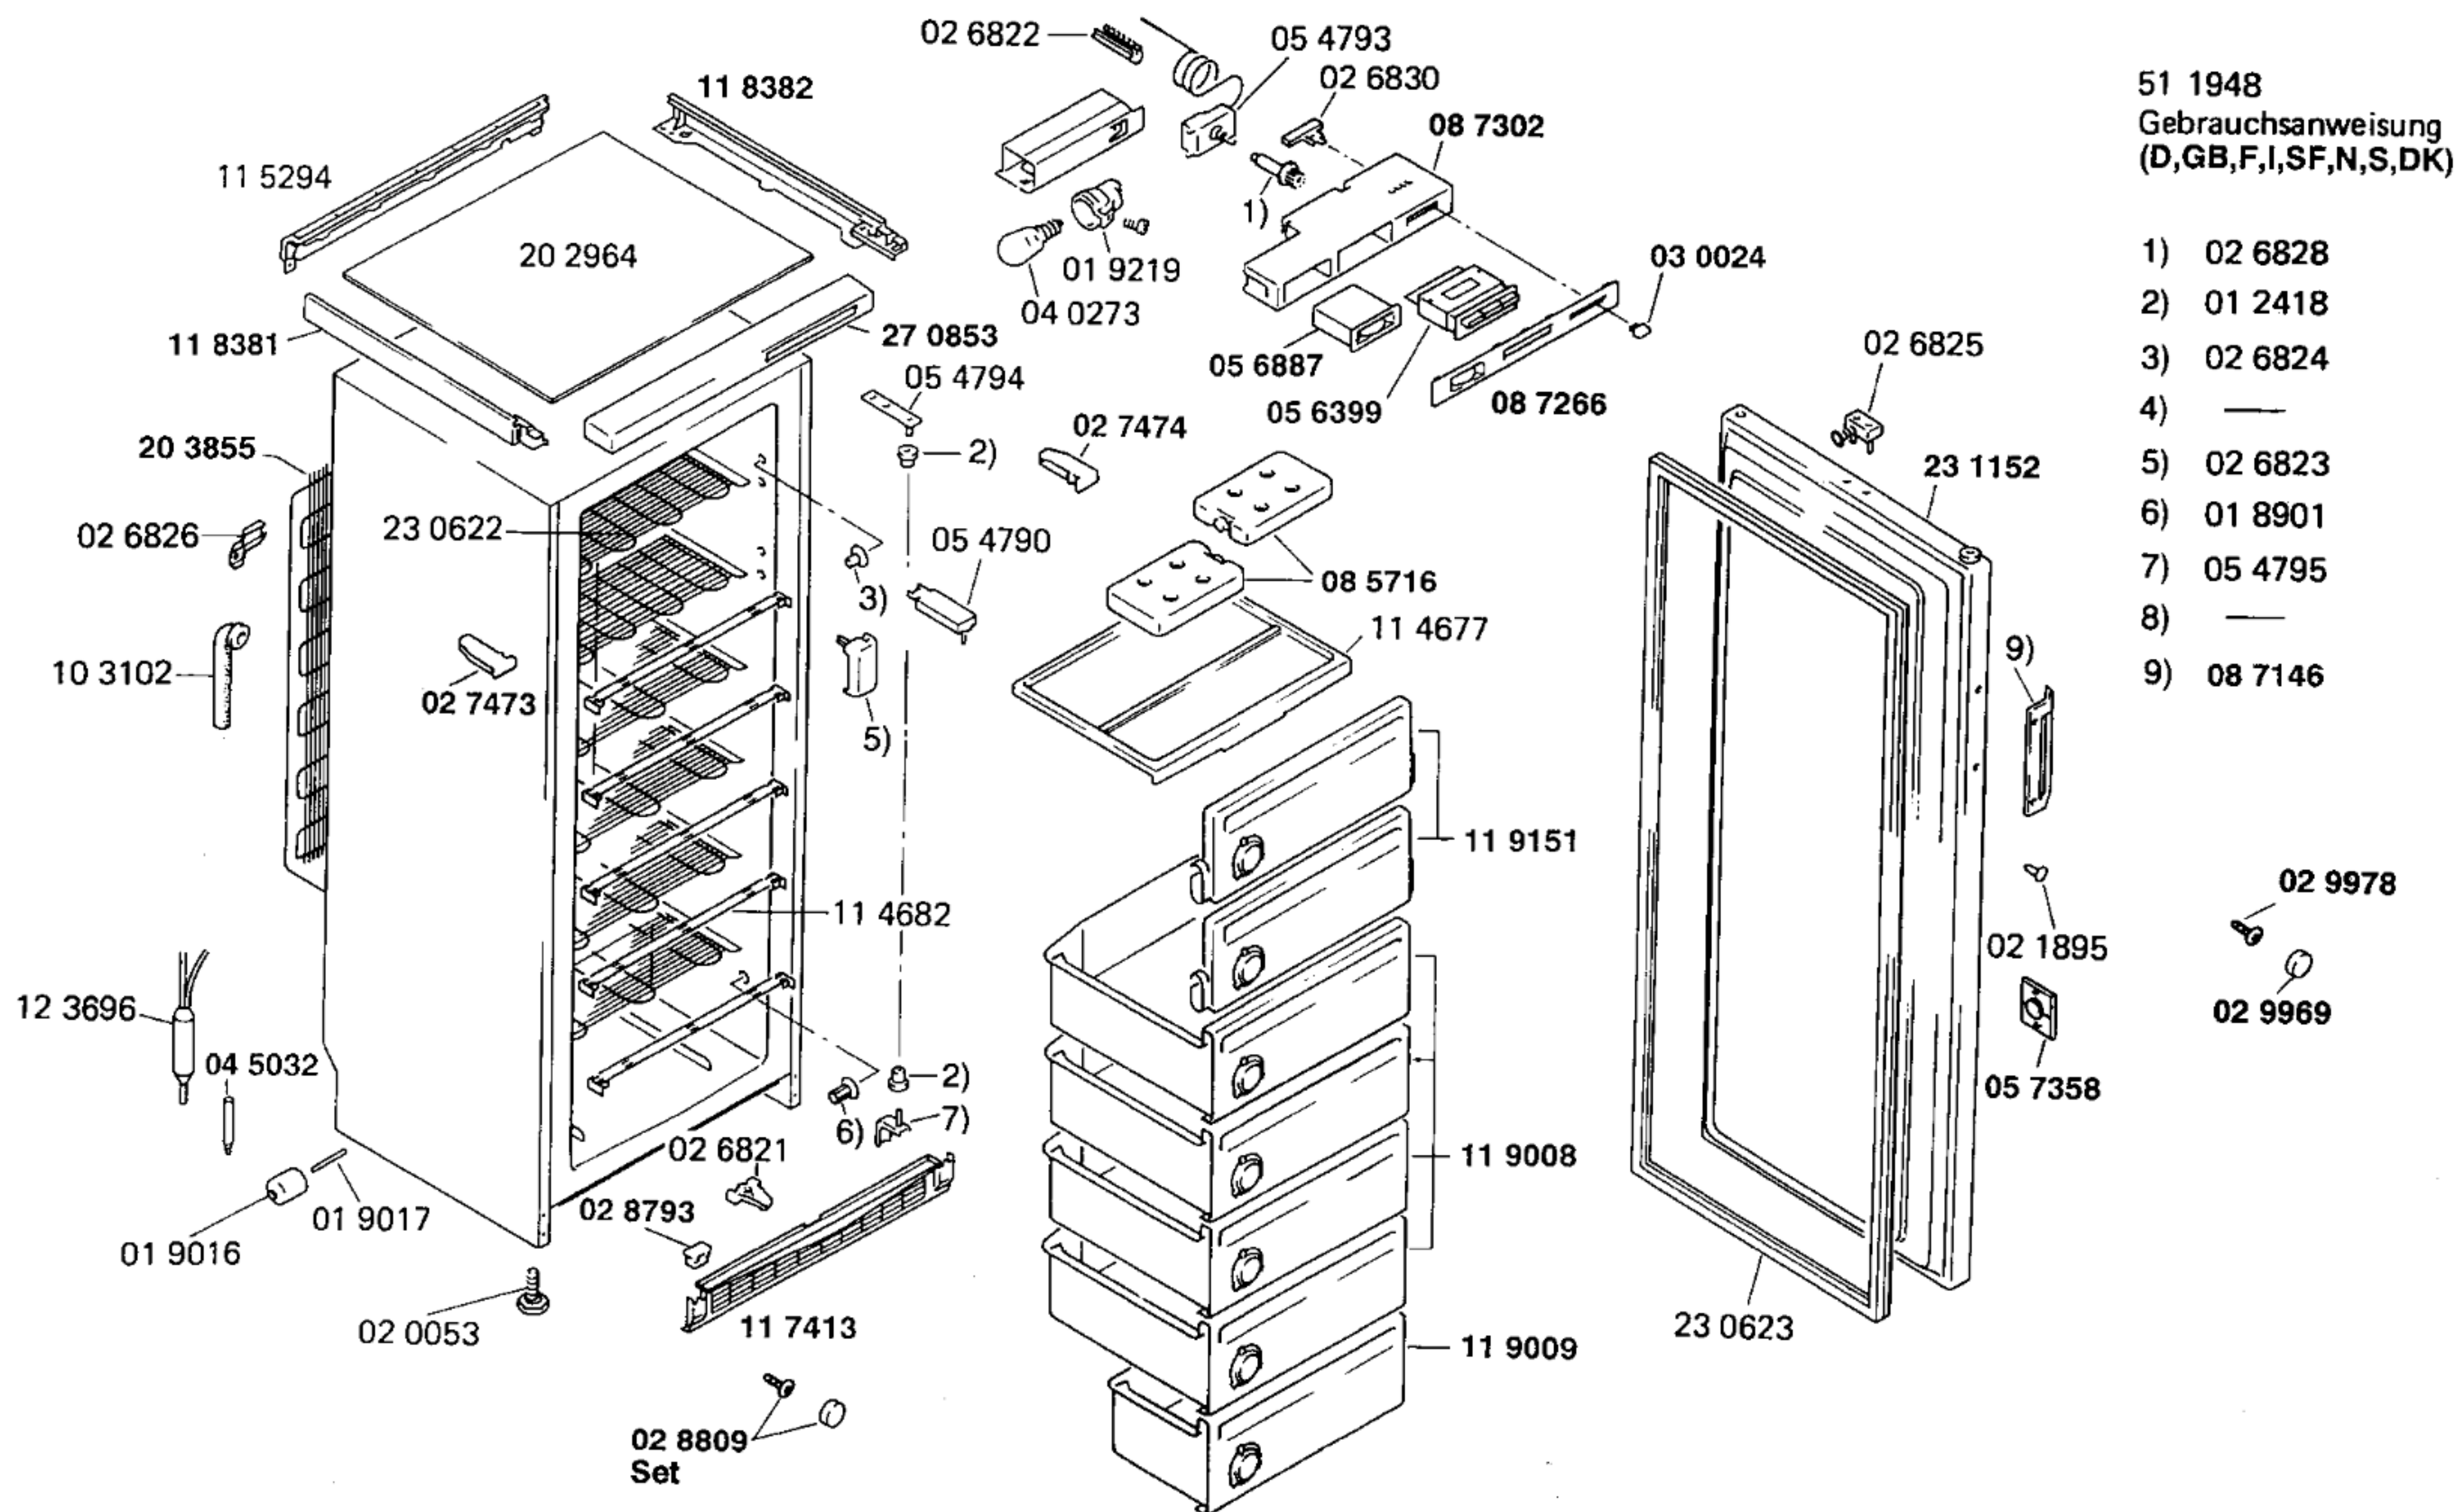

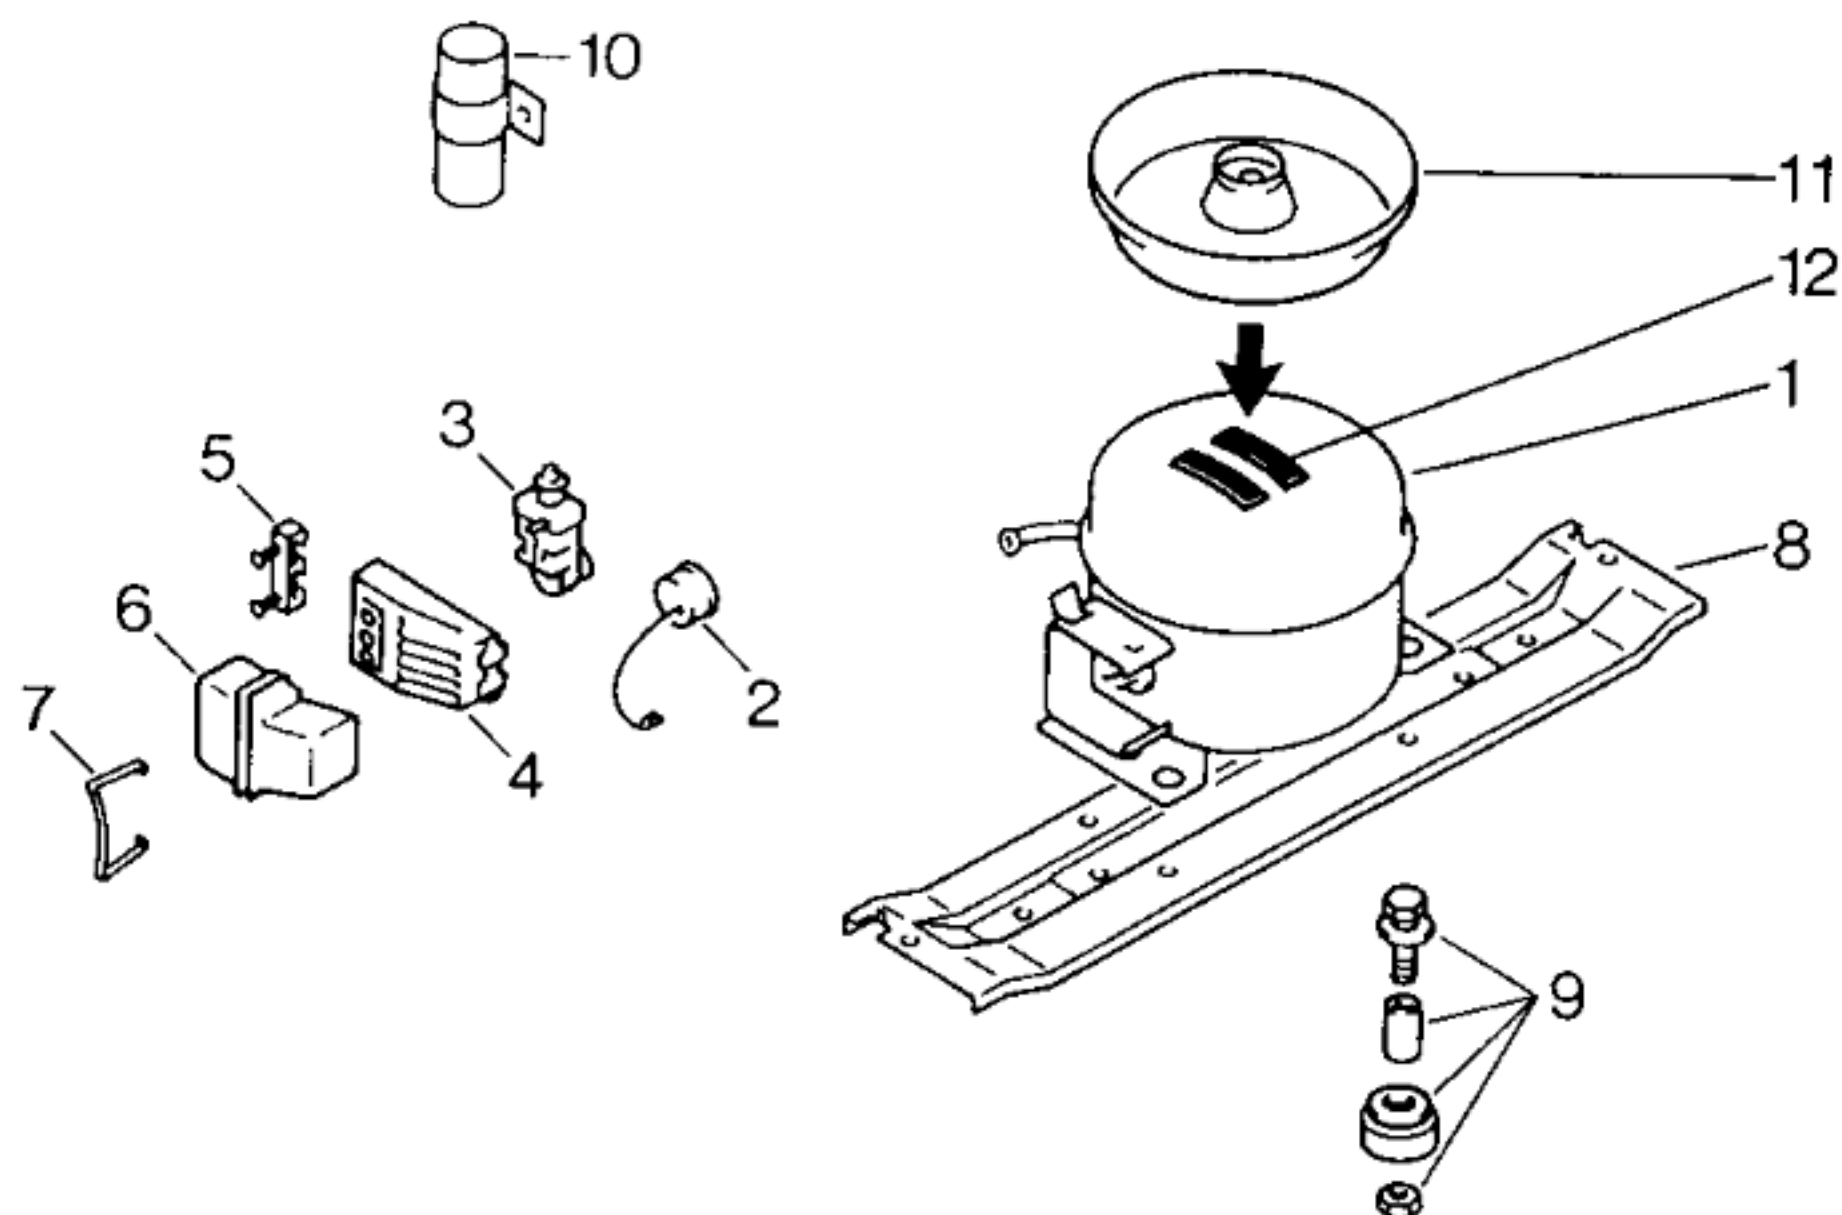

Pos.	EU1	EU2	
	Aspera	Matsushita	
	AYK 1114 A	D116-LRAA	
1	14 0540	14 0563	
2	03 1702		
3	02 9456	05 8506	
4	05 1748		
5			
6	05 1746	05 8458	
7	02 2339	02 6731	
8	11 9114	11 9114	
9	05 0166	05 0166	
10	05 6524		
11			
12			

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Aspera	Matsushita	
Typ/Type		AYK 1114 A	D116-LRAA	
Förderleistung/Delivery/Débit		l/h	1184	
Anlaufstrom/Starting current/Cour. de démarrage		A	8,75	
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	12,0	
		Hi/aux Ω	28,7	
Temp.-Regler/Thermostat		Danfoss		
Typ/Type		077 B2054		
Reglerstellung/Position		kalt warm		
Schaltwerte/Switching values/		„ein“ $^{\circ}\text{C}$	-24 -16	
Valeurs de commutation		„aus“	-34 -24	
		(„abtauen“ od.) „alarm“	-19 -12	
Füllmenge/Fill.quantity/Charge		R12 g	195	
Anschlußwert/Conn.load/Puiss. connectée		W	120	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		