



07 4445

35 4305

16 9300

48 1147
Set

35 2470

15 3429

35 3208
kompl.

02 9965

029966

05 9129

09 2894


02 9963

23 5128

09 3110




06 5644

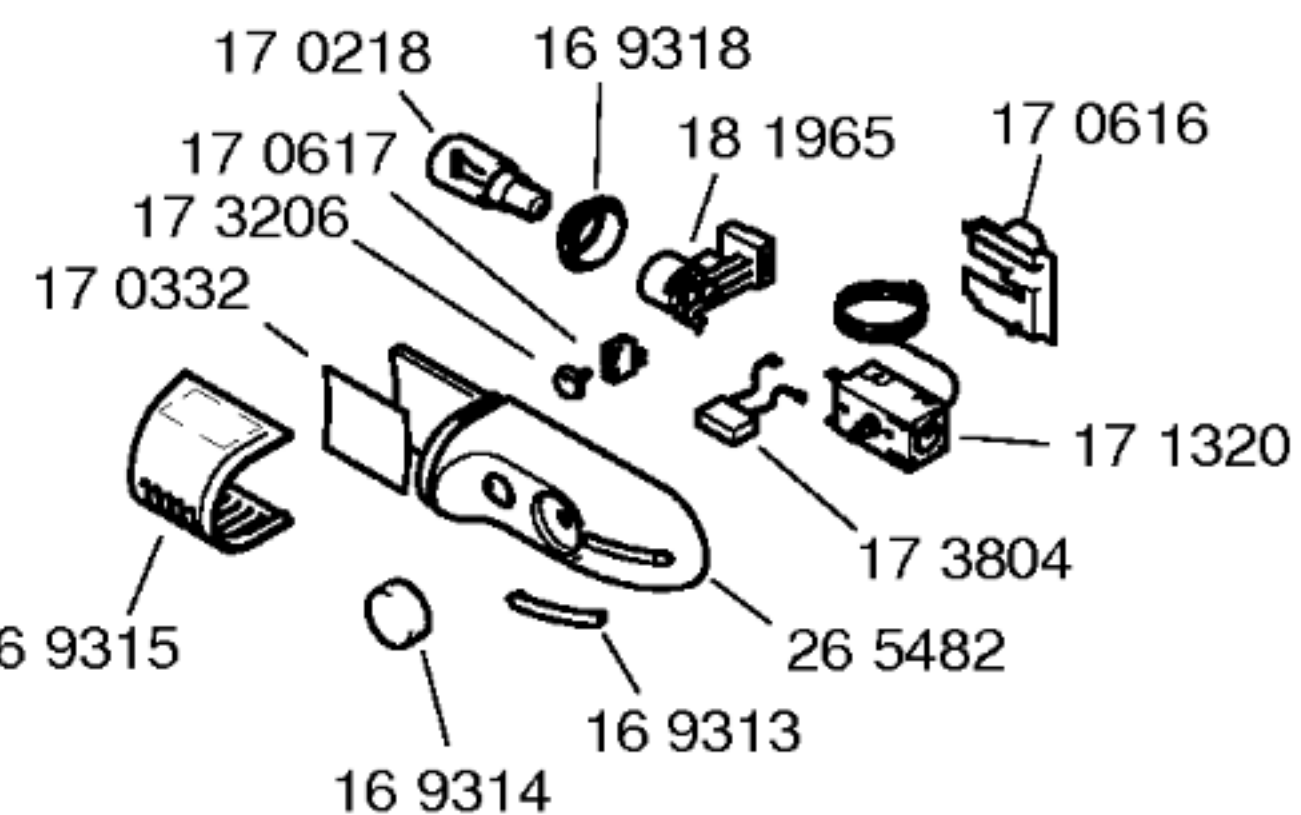

Mat. – Nr. – Konstante
3740


Gebrauchsanweisung
58 6318
(DE,EN,FR,IT,NL,DA)
Montageanleitung
52 3227
(DE,EN,FR,IT,NL,DA
NO,FI,SE,TR)

Beistellsatz
26 6056

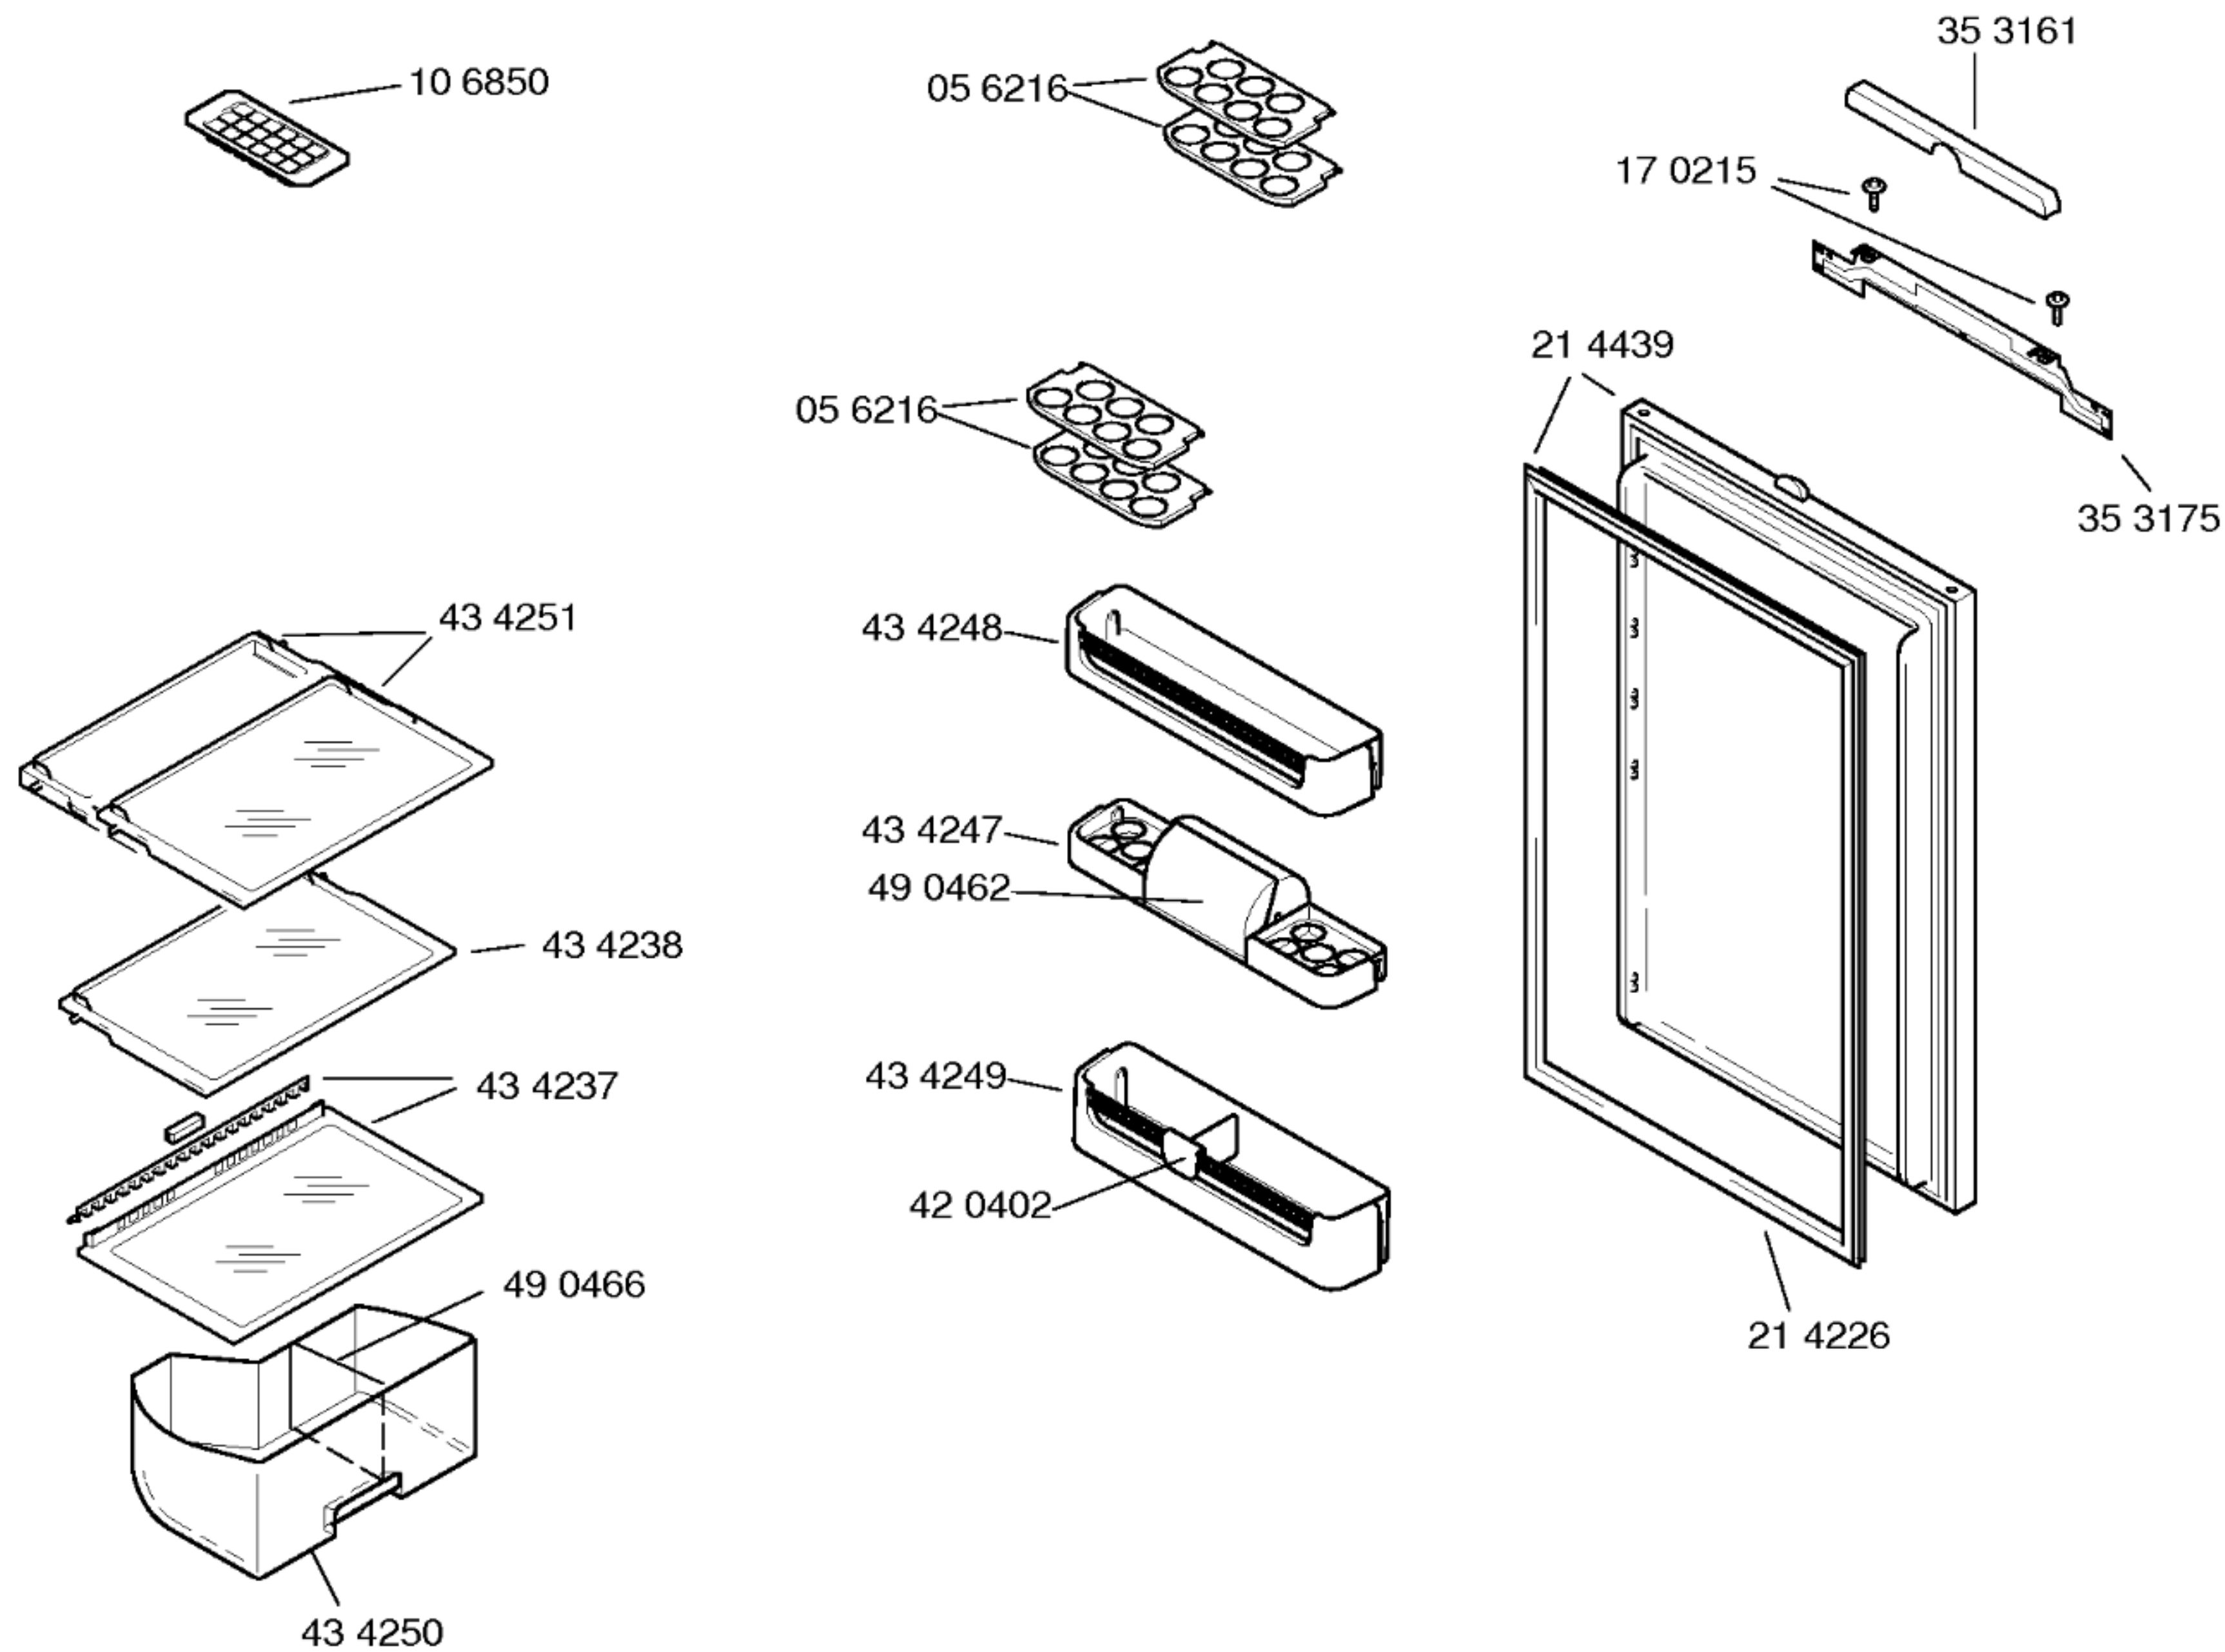

Mat. – Nr. – Konstante
3740

Mat. – Nr. – Konstante
3740

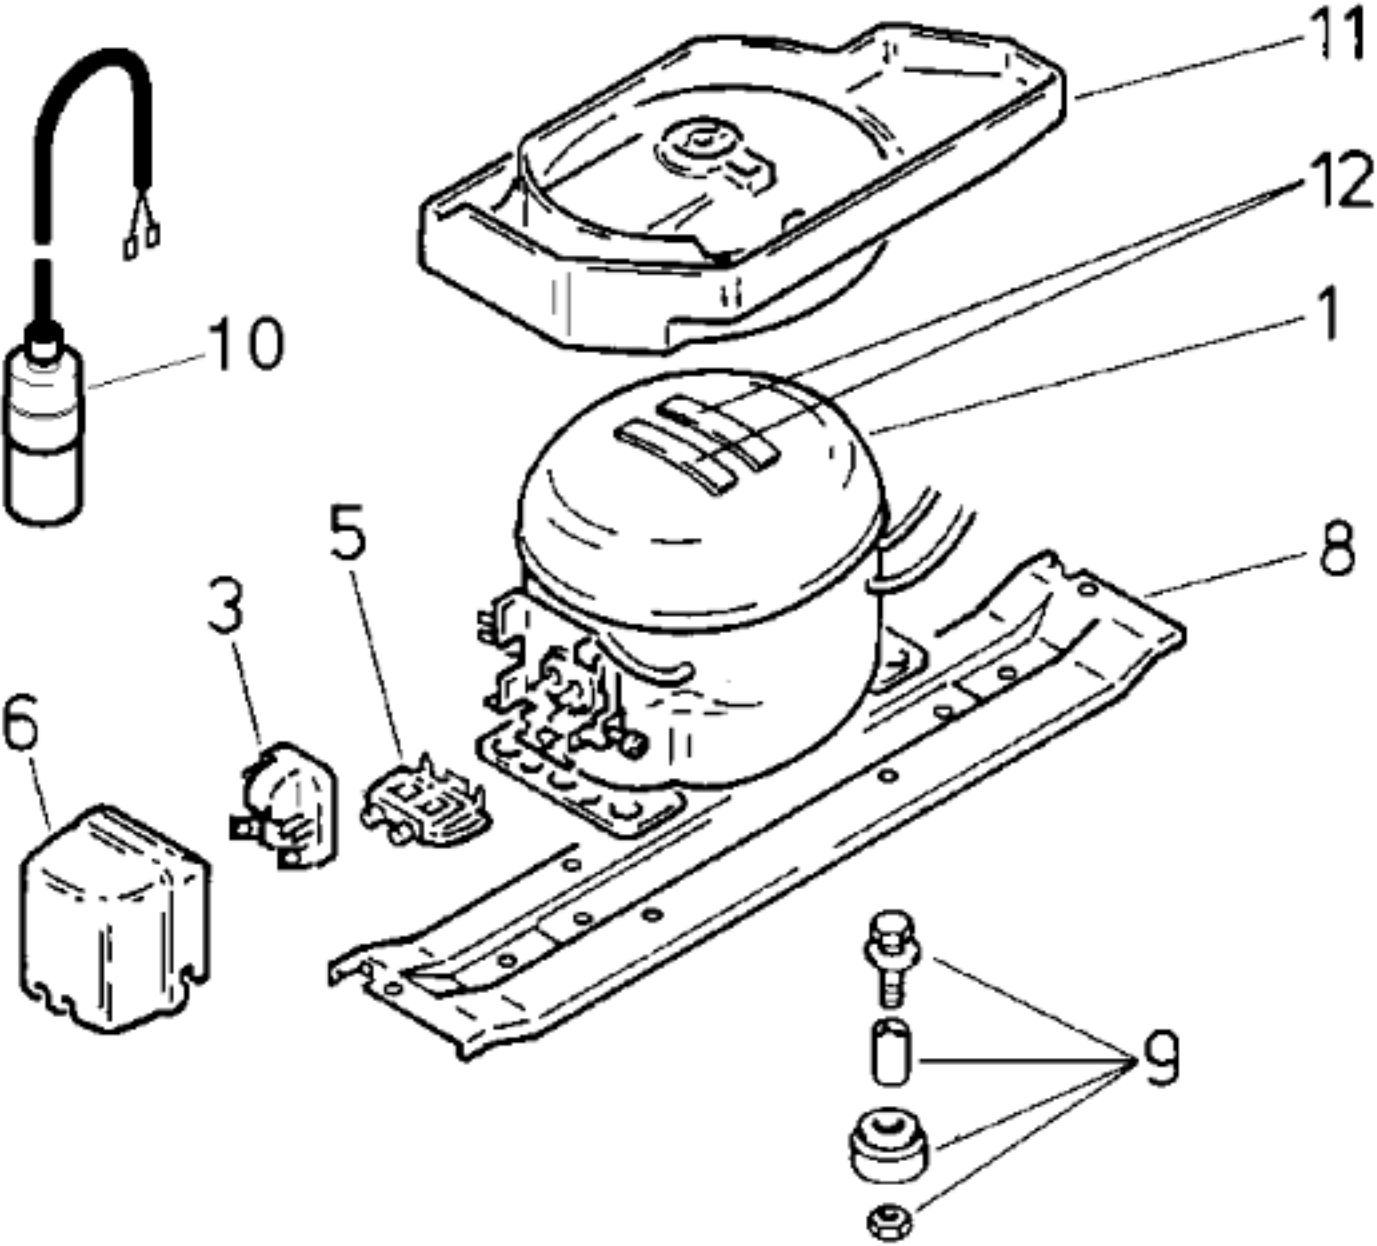

	V01		
Pos.	Danfoss		
	TLY 6 KK2		
1	14 2058		
2			
3	15 1055		
4			
5	15 0760		
6	15 1072		
7	16 9319		
8	26 4879		
9	0 50166		
10	16 5852		
11	36 5099		
12	05 6008		

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES			
Verdichter/Compressor/Compresseur		Danfoss	
Typ/Type		TLY 6 KK2	
Förderleistung/Delivery/Débit	l/h	1026	
Anlaufstrom/Starting current/Cour de démarrage	A	4,4	
Widerstand/Resistance/Résistance	Ω	34,0	
Hi/aux	Ω	31,0	
Temp.–Regler/Thermostat		Ranco	
Typ/Type		K59	
Regelstellung/Position		kalt	warm
Schaltwerte/Switching values	"warm"	+4,0	+4,0
Valeurs de commutation	"kalt"	–32,0	–12,0
	"alarm"		
Füllmenge/Fill.quantity/Charge	R600a	*	
Anschlußwert/Conn.load/Puiss. connectée	W	68	
Heizung/Heater/Chauffage			
Widerstand/Resistance/Résistance	Ω		
Leistung/Power/Puissance	W		
Ventilator/Blower/Ventilateur			
Widerstand/Resistance/Résistance	Ω		
Temp.–Regler/Thermostat			
Magnetventil/Magnetic valve/Electrovanne			
Widerstand/Resistance/Résistance	Ω		
Spannung/Voltage/Tension	V		

* siehe Typenschild