



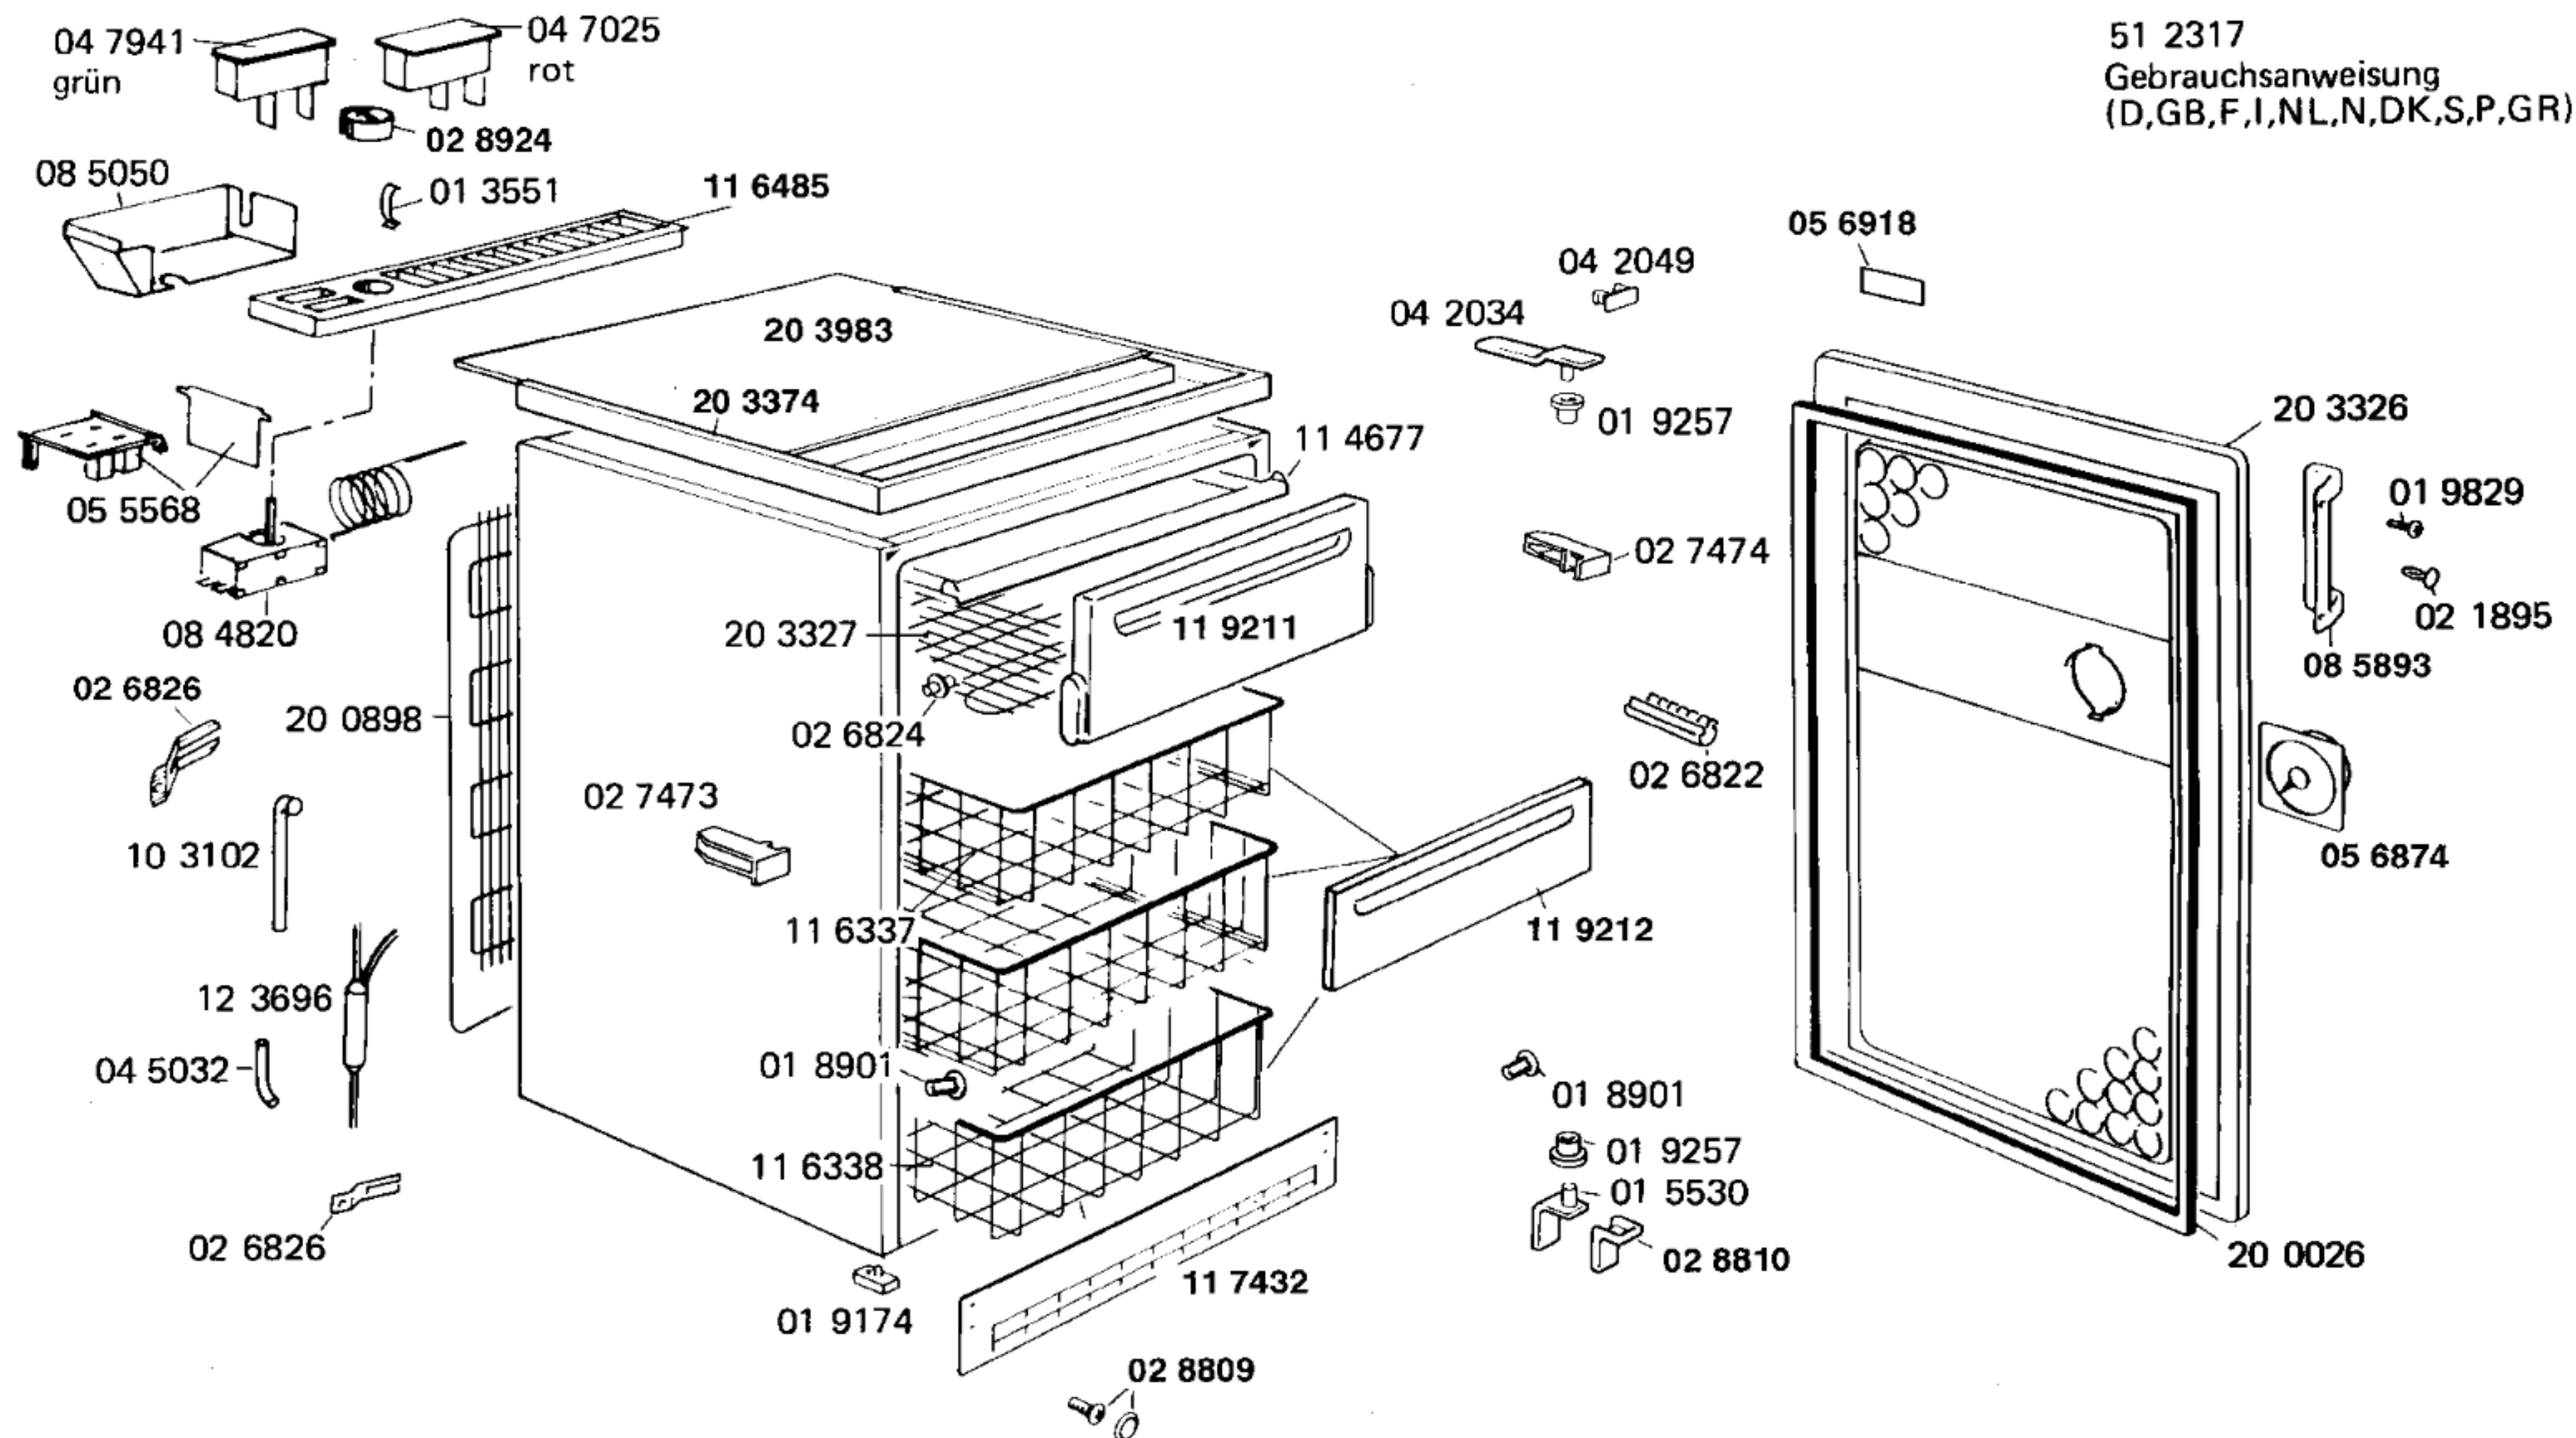

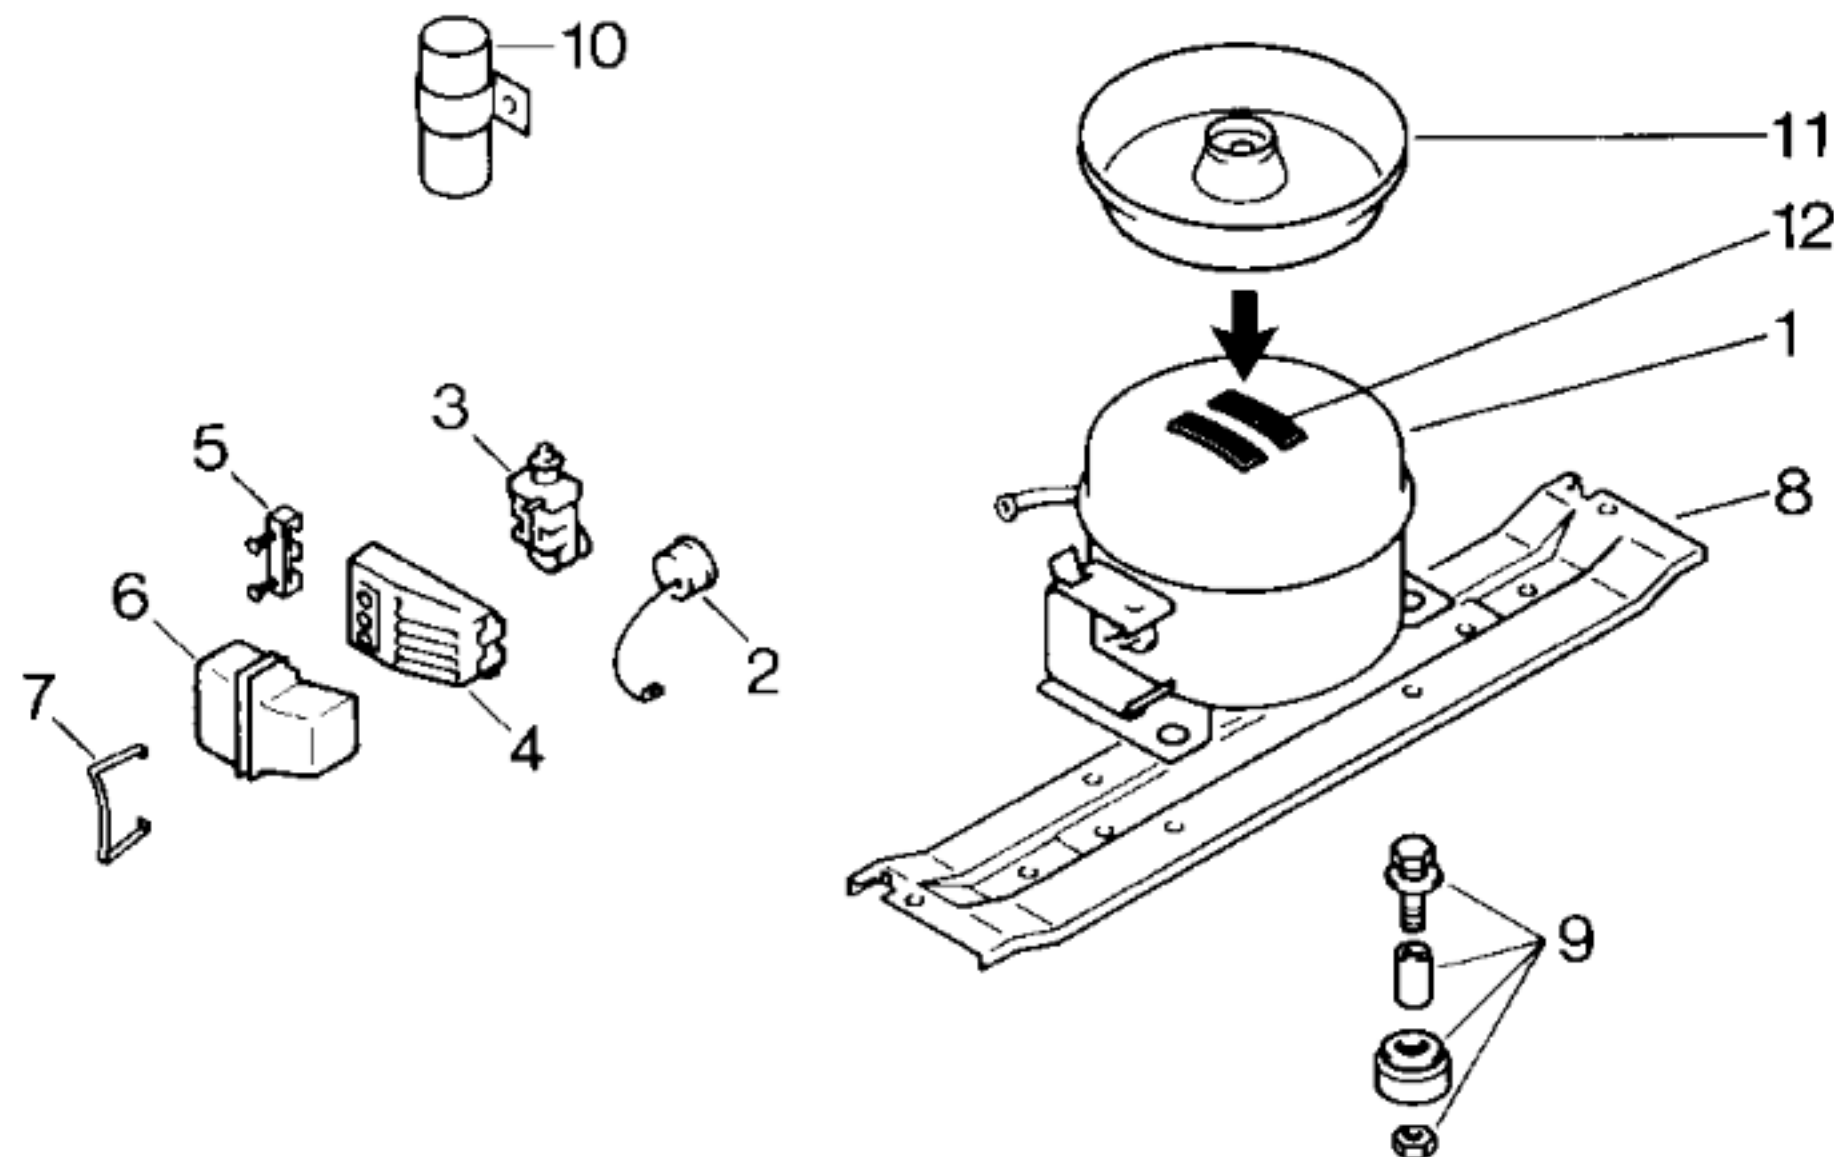

Pos.	EU1,CH1,F1		
	Aspera BY 1112 A		
1	14 0166		
2	02 2337		
3	02 2342		
4	05 1748		
5			
6	05 1746		
7	02 2339		
8	11 1567		
9	05 0166		
10			
11			
12	05 6008		

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Aspera		
Typ/Type		BY 1112 A		
Förderleistung/Delivery/Débit	l/h	1060		
Anlaufstrom/Starting current/Cour. de démarrage	A	8,5		
Widerstand/Resistance/Résistance	Ha/main/prin.	Ω	17,9	
	Hi/aux	Ω	43,7	
Temp.-Regler/Thermostat		M & J		
Typ/Type		TF 57 SF 2		
Reglerstellung/Position		kalt	warm	
Schaltwerte/Switching values/	„ein“	-25	-17	
Valeurs de commutation	„aus“	-35	-25	
	(„abtauen“ od.)	„alarm“	-19	-13
Füllmenge/Fill.quantity/Charge	R12	g	150	
Anschlußwert/Conn.load/Puiss. connectée		W	120	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		