



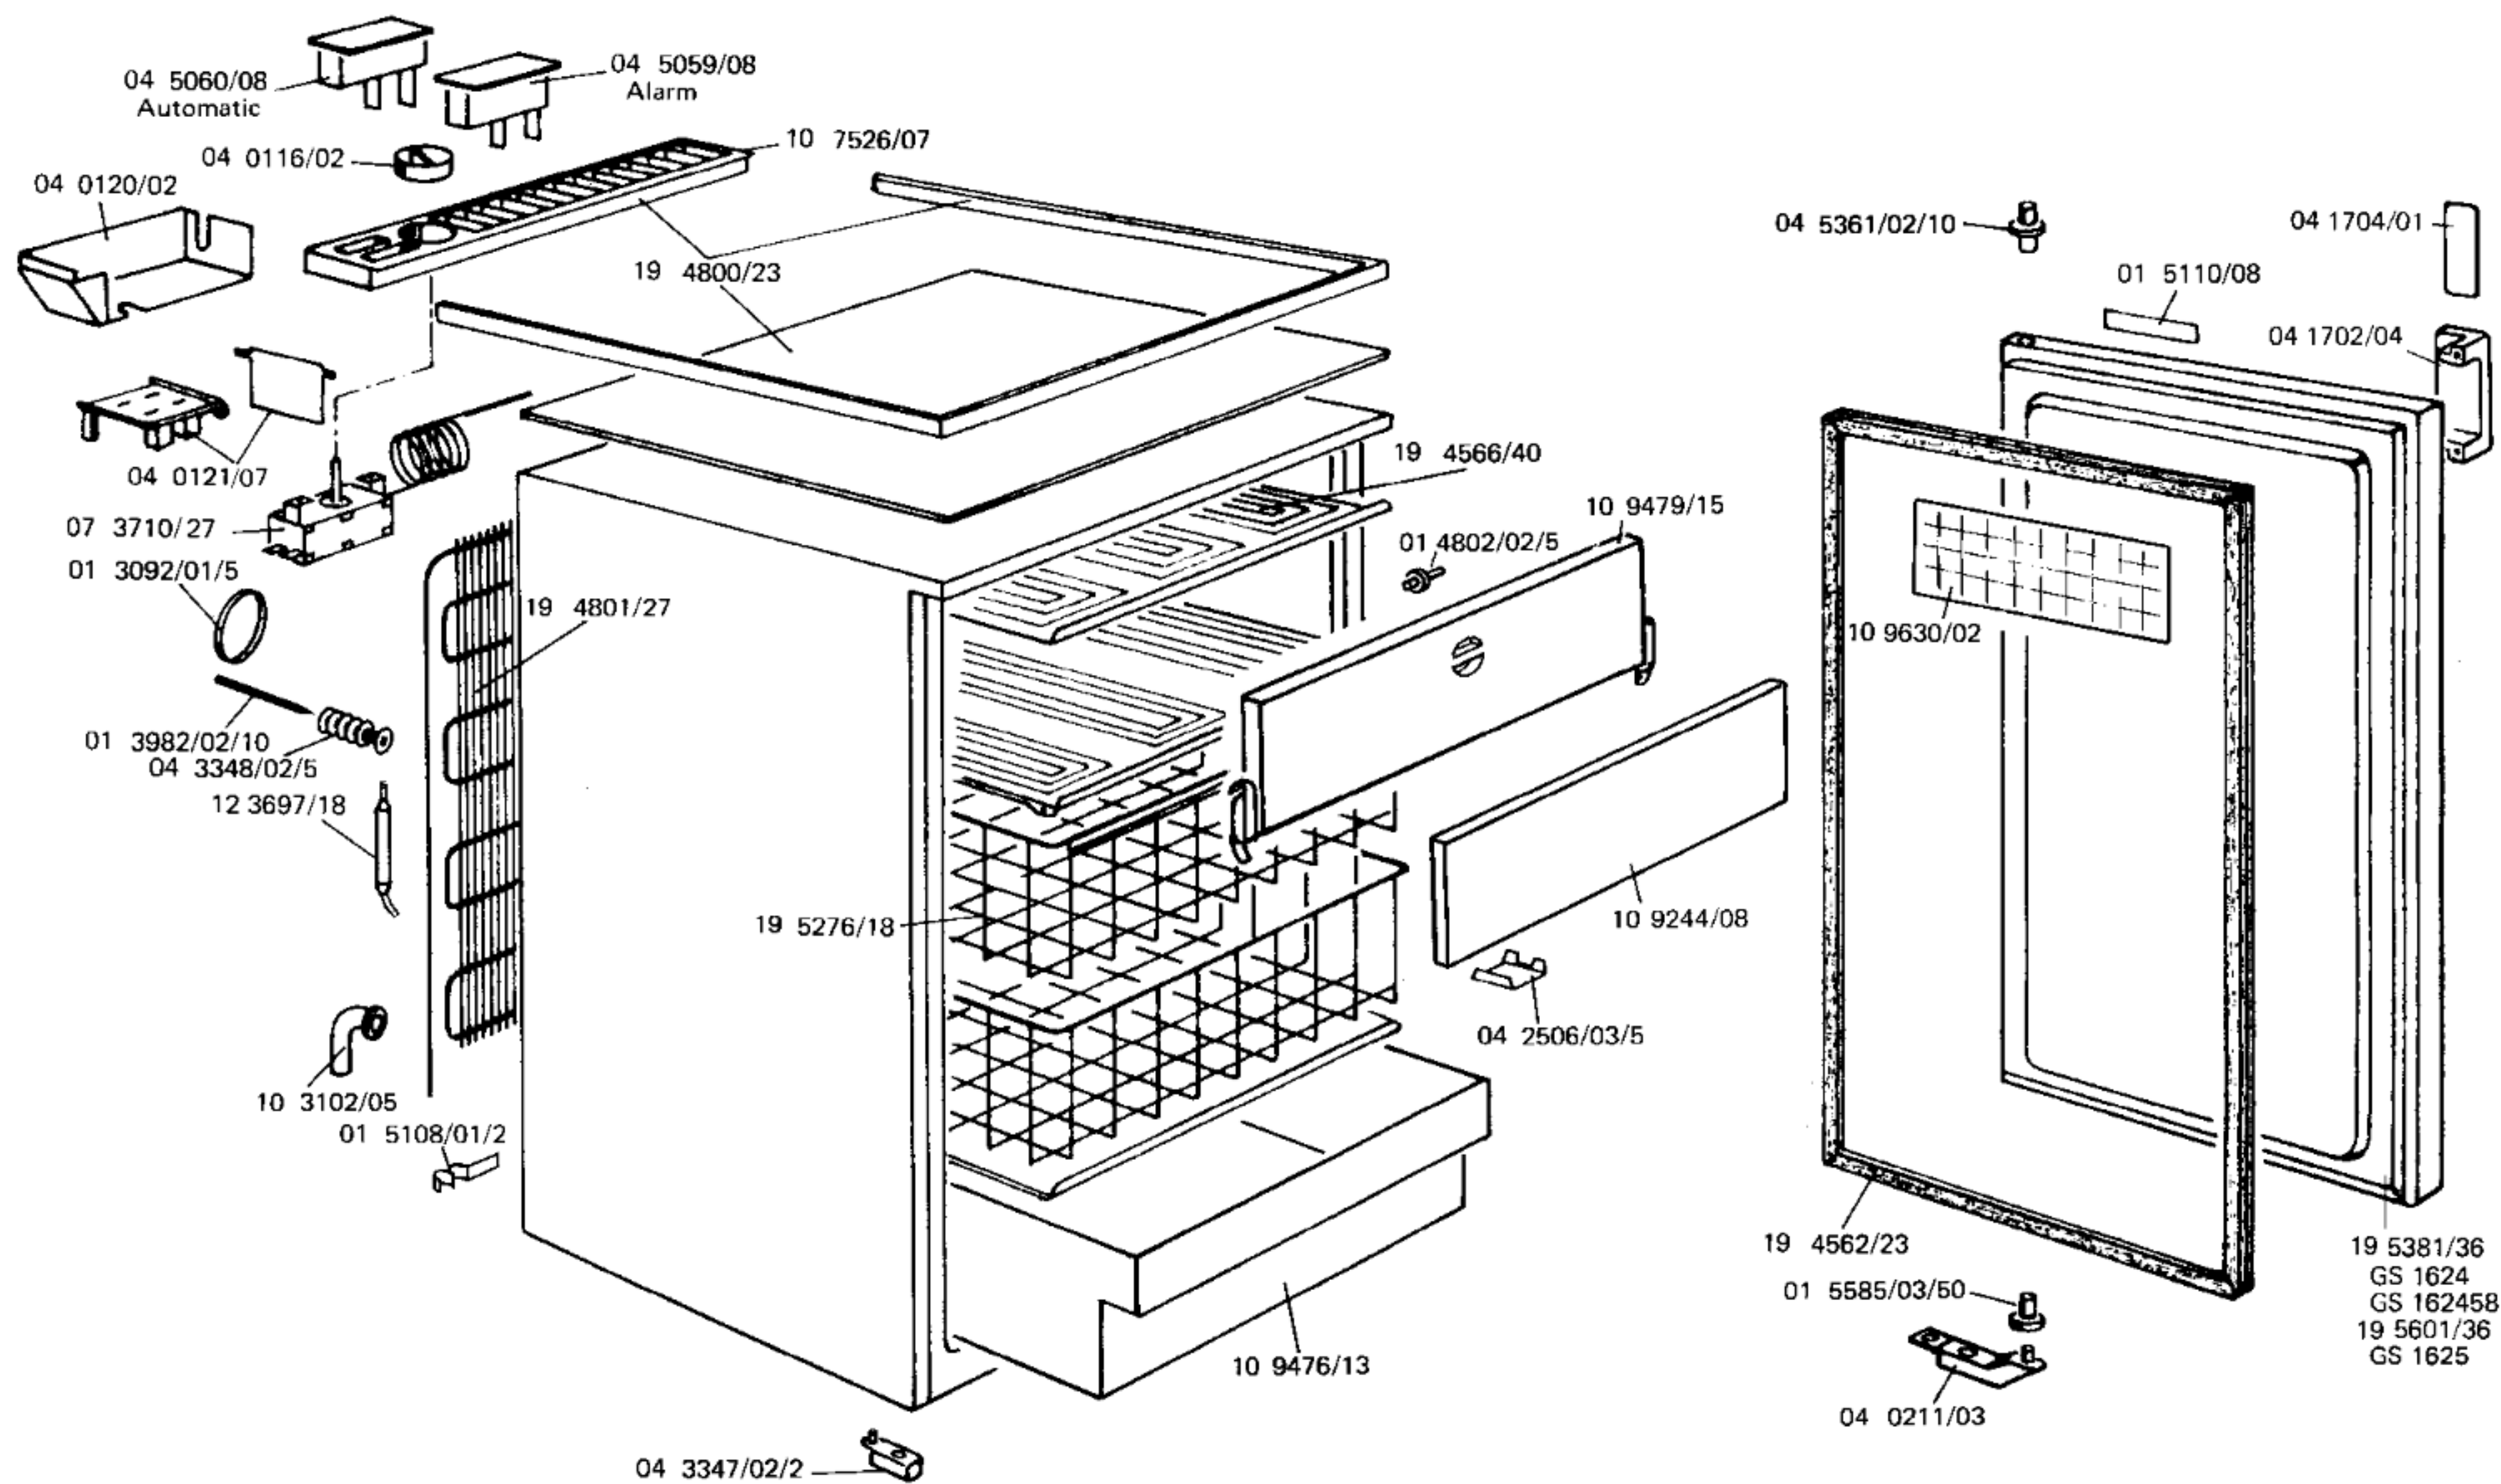

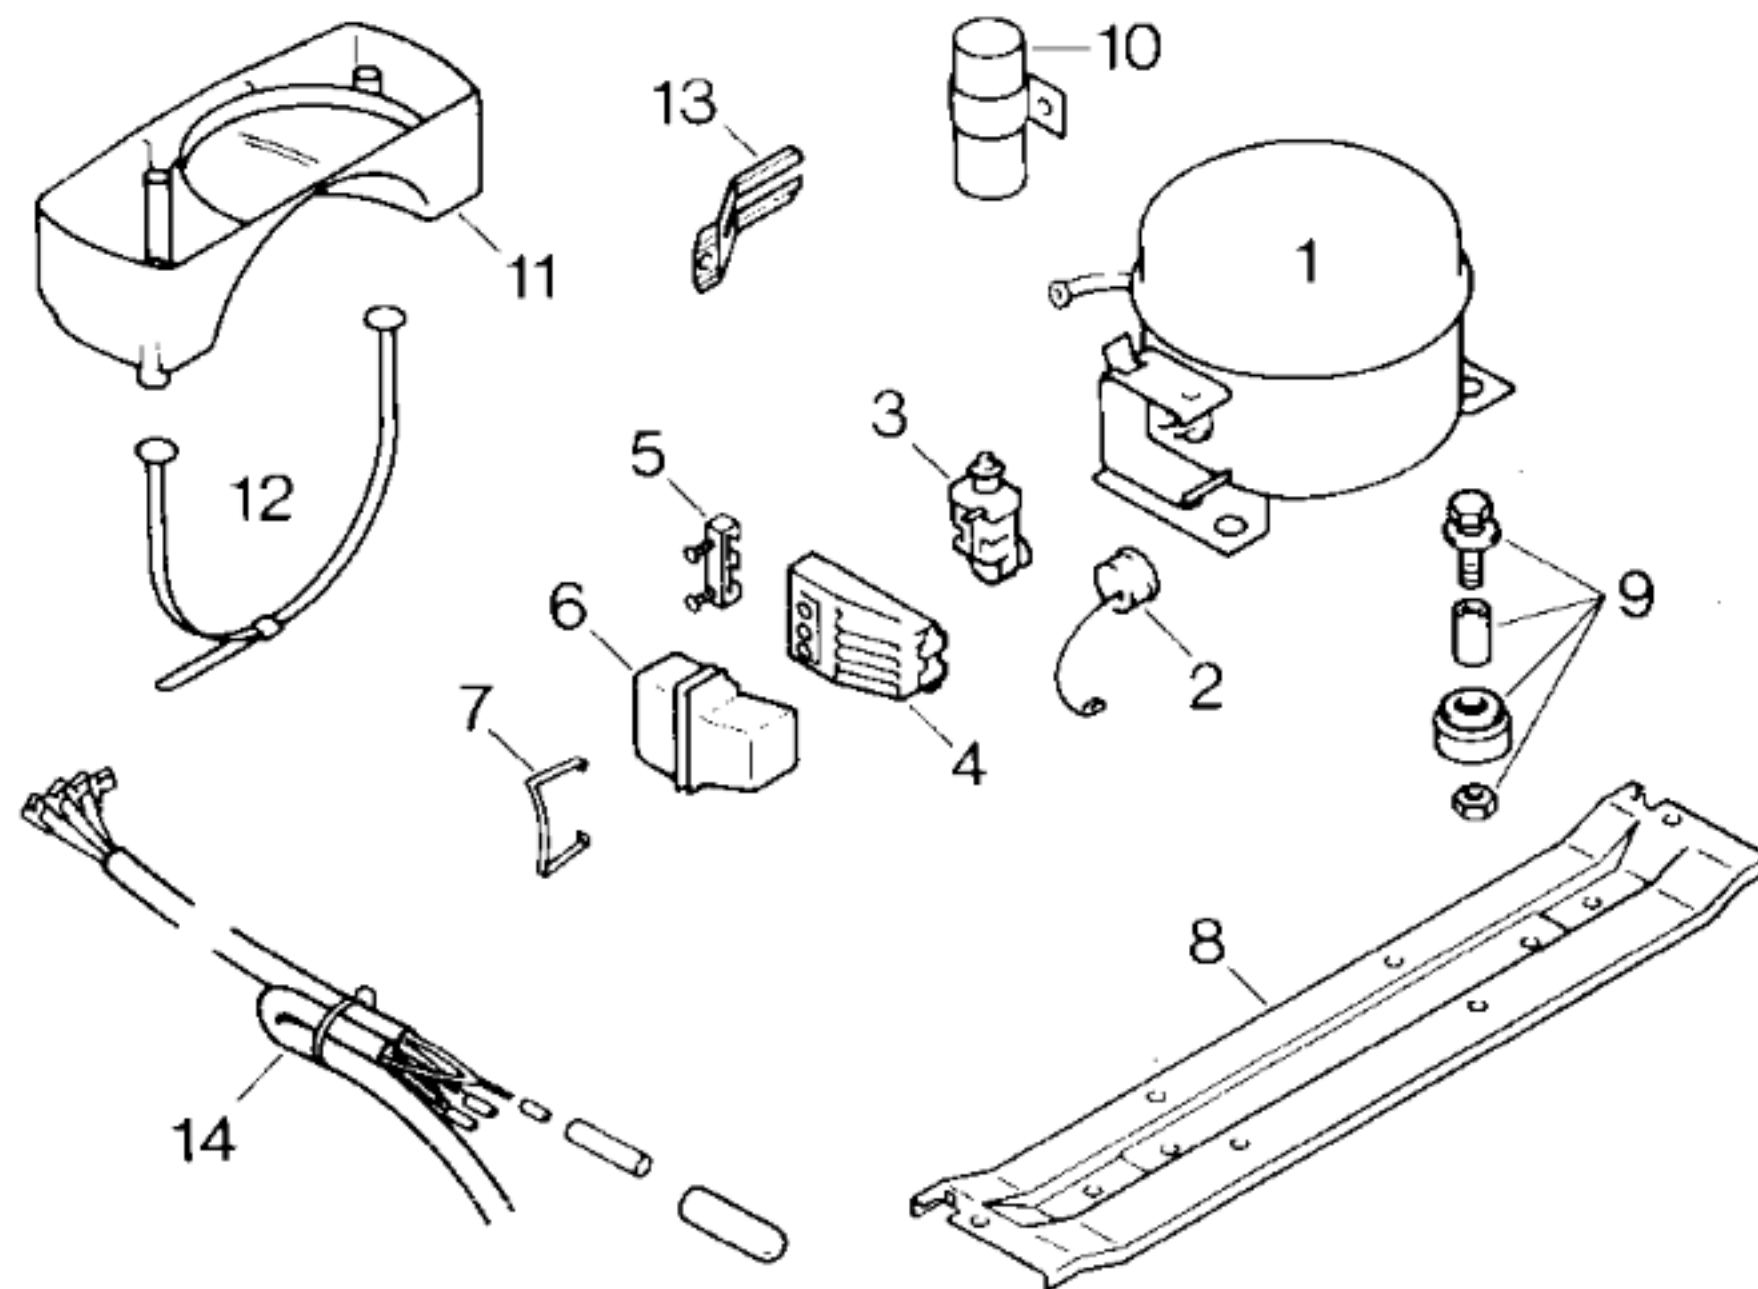

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur				
Typ/Type		Bosch	Danfoss	
Förderleistung/Delivery/Débit	l/h	V 1040	TL 5 A	
Anlaufstrom/Starting current/Cour. de démarrage	A	9,5	V 920	
Widerstand/Resistance/Résistance	Ha/main/prin. Ω	15,0	15,7	
	Hi/aux Ω	29,0	18,8	
Temp.-Regler/Thermostat				
Typ/Type		Bosch		
Reglerstellung/Position		kalt	warm	
Schaltwerte/Switching values/	„ein“ $^{\circ}\text{C}$	- 24	- 18	
Valeurs de commutation	„aus“	- 32	25	
	(„abtauen“ od.) „alarm“	- 18	- 13	
Füllmenge/Fill.quantity/Charge	R12	g	150	
Anschlußwert/Conn.load/Puiss. connectée		W	120	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance	Ω			
Leistung/Power/Puissance	W			
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance	Ω			
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance	Ω			
Spannung/Voltage/Tension	V			

Pos.	Bosch	Danfoss		
1		14 0065/45		
2	07 2131/18			
3	07 3699/09	02 0108/27		
4	04 9865/05			
5				
6	04 9865/05	05 1413/05		
7				
8		*11 1840/04		
9	01 4895/02	*05 0166/05		
10				
11				
12				
13		*04 1568/01/2		
14		*05 1226/08		

*) Bei Ersatz des Bosch-Verdichters mitbestellen
To be ordered when replacing the Bosch compressor
A commander lors du remplacement du compresseur Bosch