


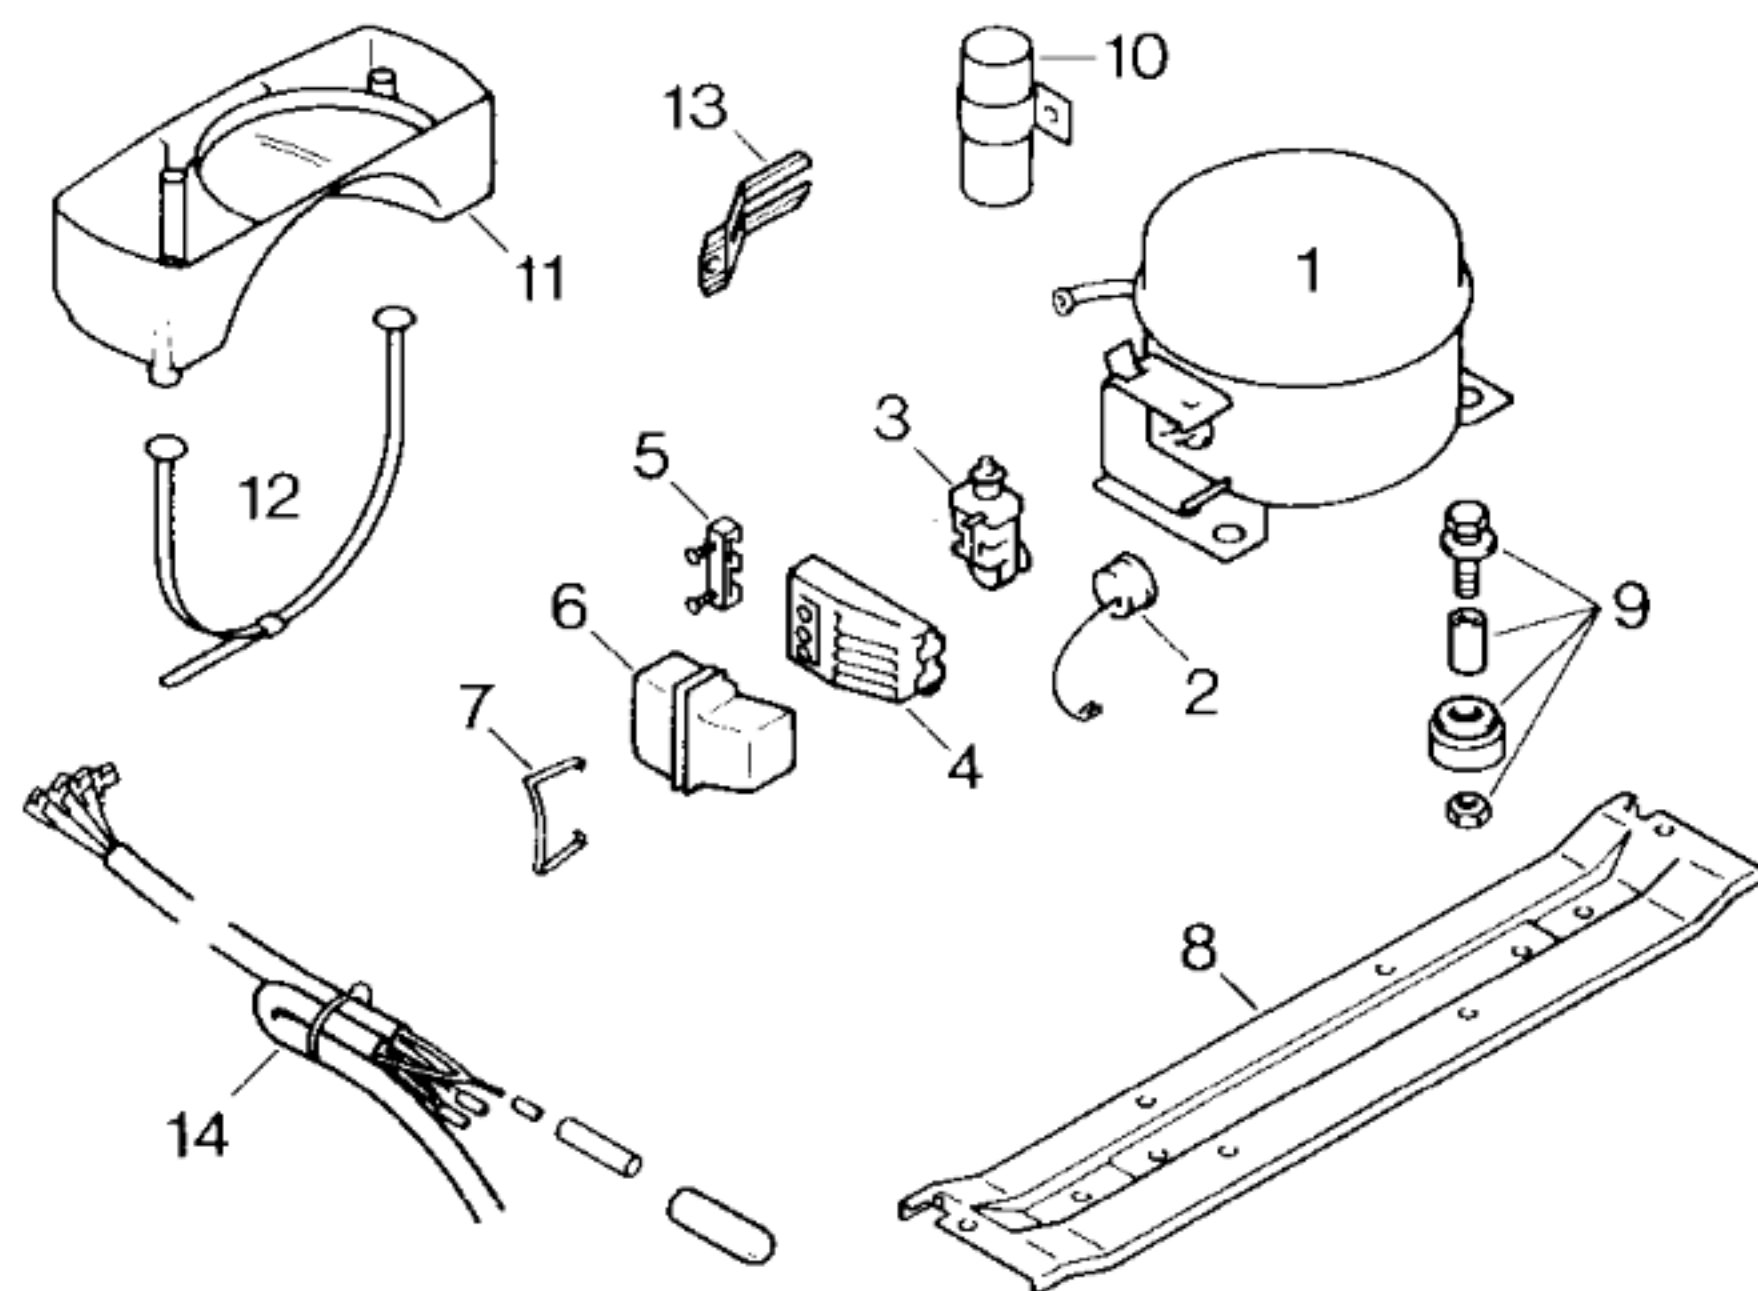

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		KS	GS	KS/GS	
Typ/Type		Bosch	Bosch	Danfoss	
Förderleistung/Delivery/Débit		V 612	V 792	702	
Anlaufstrom/Starting current/Cour. de démarrage		A 6,4	9,4	7,8	
Widerstand/Resistance/Résistance	Ha/main/prin.	Ω 28,0	18,0	23,8	
	Hi/aux	Ω 39,0	24,0	17,0	
Temp.-Regler/Thermostat		M + J / Bosch			
Typ/Type		kalt warm		kalt warm	
Reglerstellung/Position		+ 4 + 4		- 23 - 17	
Schaltwerte/Switching values/ Valeurs de commutation	„ein“	- 24 - 10		- 31 - 24	
	„aus“			- 18 - 13	
Füllmenge/Fill.quantity/Charge		R12	g	80	185
Anschlußwert/Conn.load/Puiss. connectée		W		200	
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance		Ω			
	Leistung/Power/Puissance	W			
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance		Ω			
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance		Ω			
	Spannung/Voltage/Tension	V			

Pos.	KS	GS	KS/GS	
	Bosch	Bosch	Danfoss	
1			13 1064/45	
2	07 1691/18	07 2115/18		
3	07 1692/18	07 1804/18	02 0108/27	
4	04 9757/02			
5				
6	04 9758/02		05 1413/06	
7				
8			*11 1493/03	
9	01 4895/02		*05 0166/05	
10				
11	10 6693/03		*11 1243/01	
12				
13			*04 1568/01/2	
14			*05 1226/08	

*) Bei Ersatz des Bosch-Verdichters mitbestellen
To be ordered when replacing the Bosch compressor
A commander lors du remplacement du compresseur Bosch