
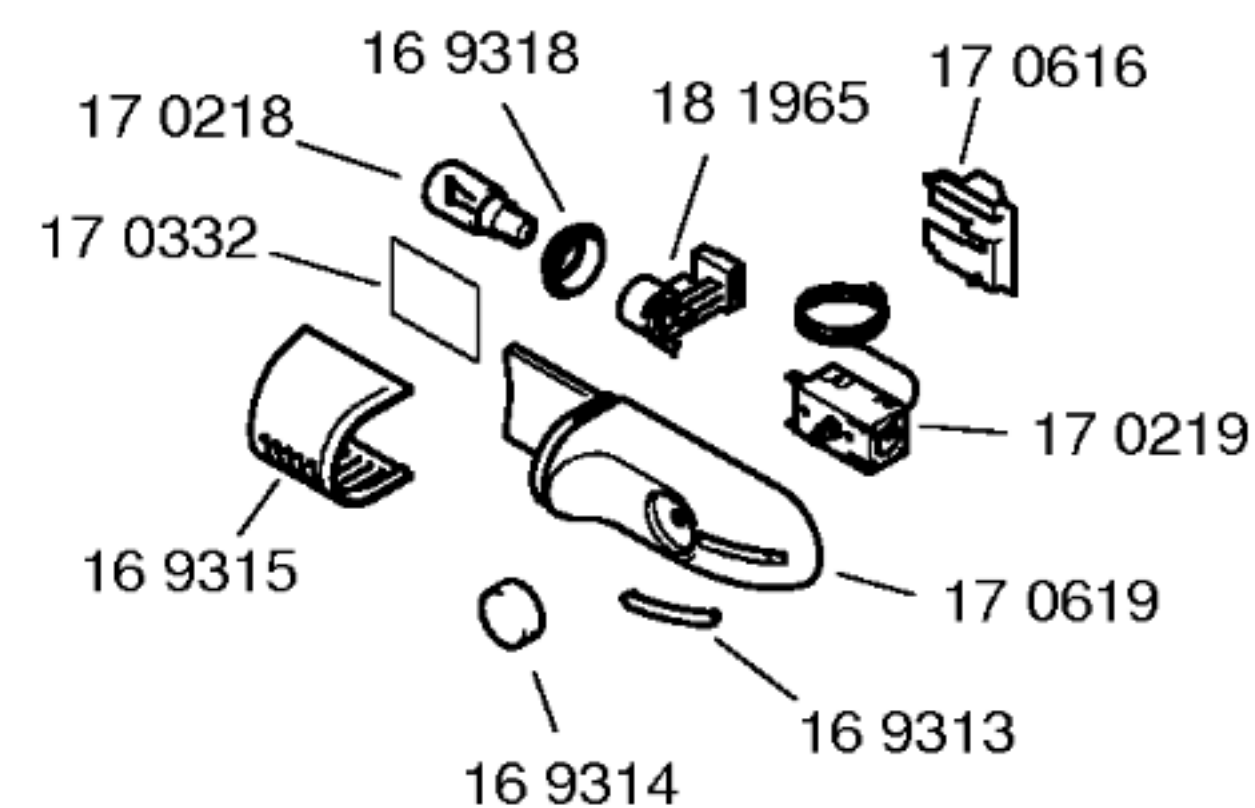


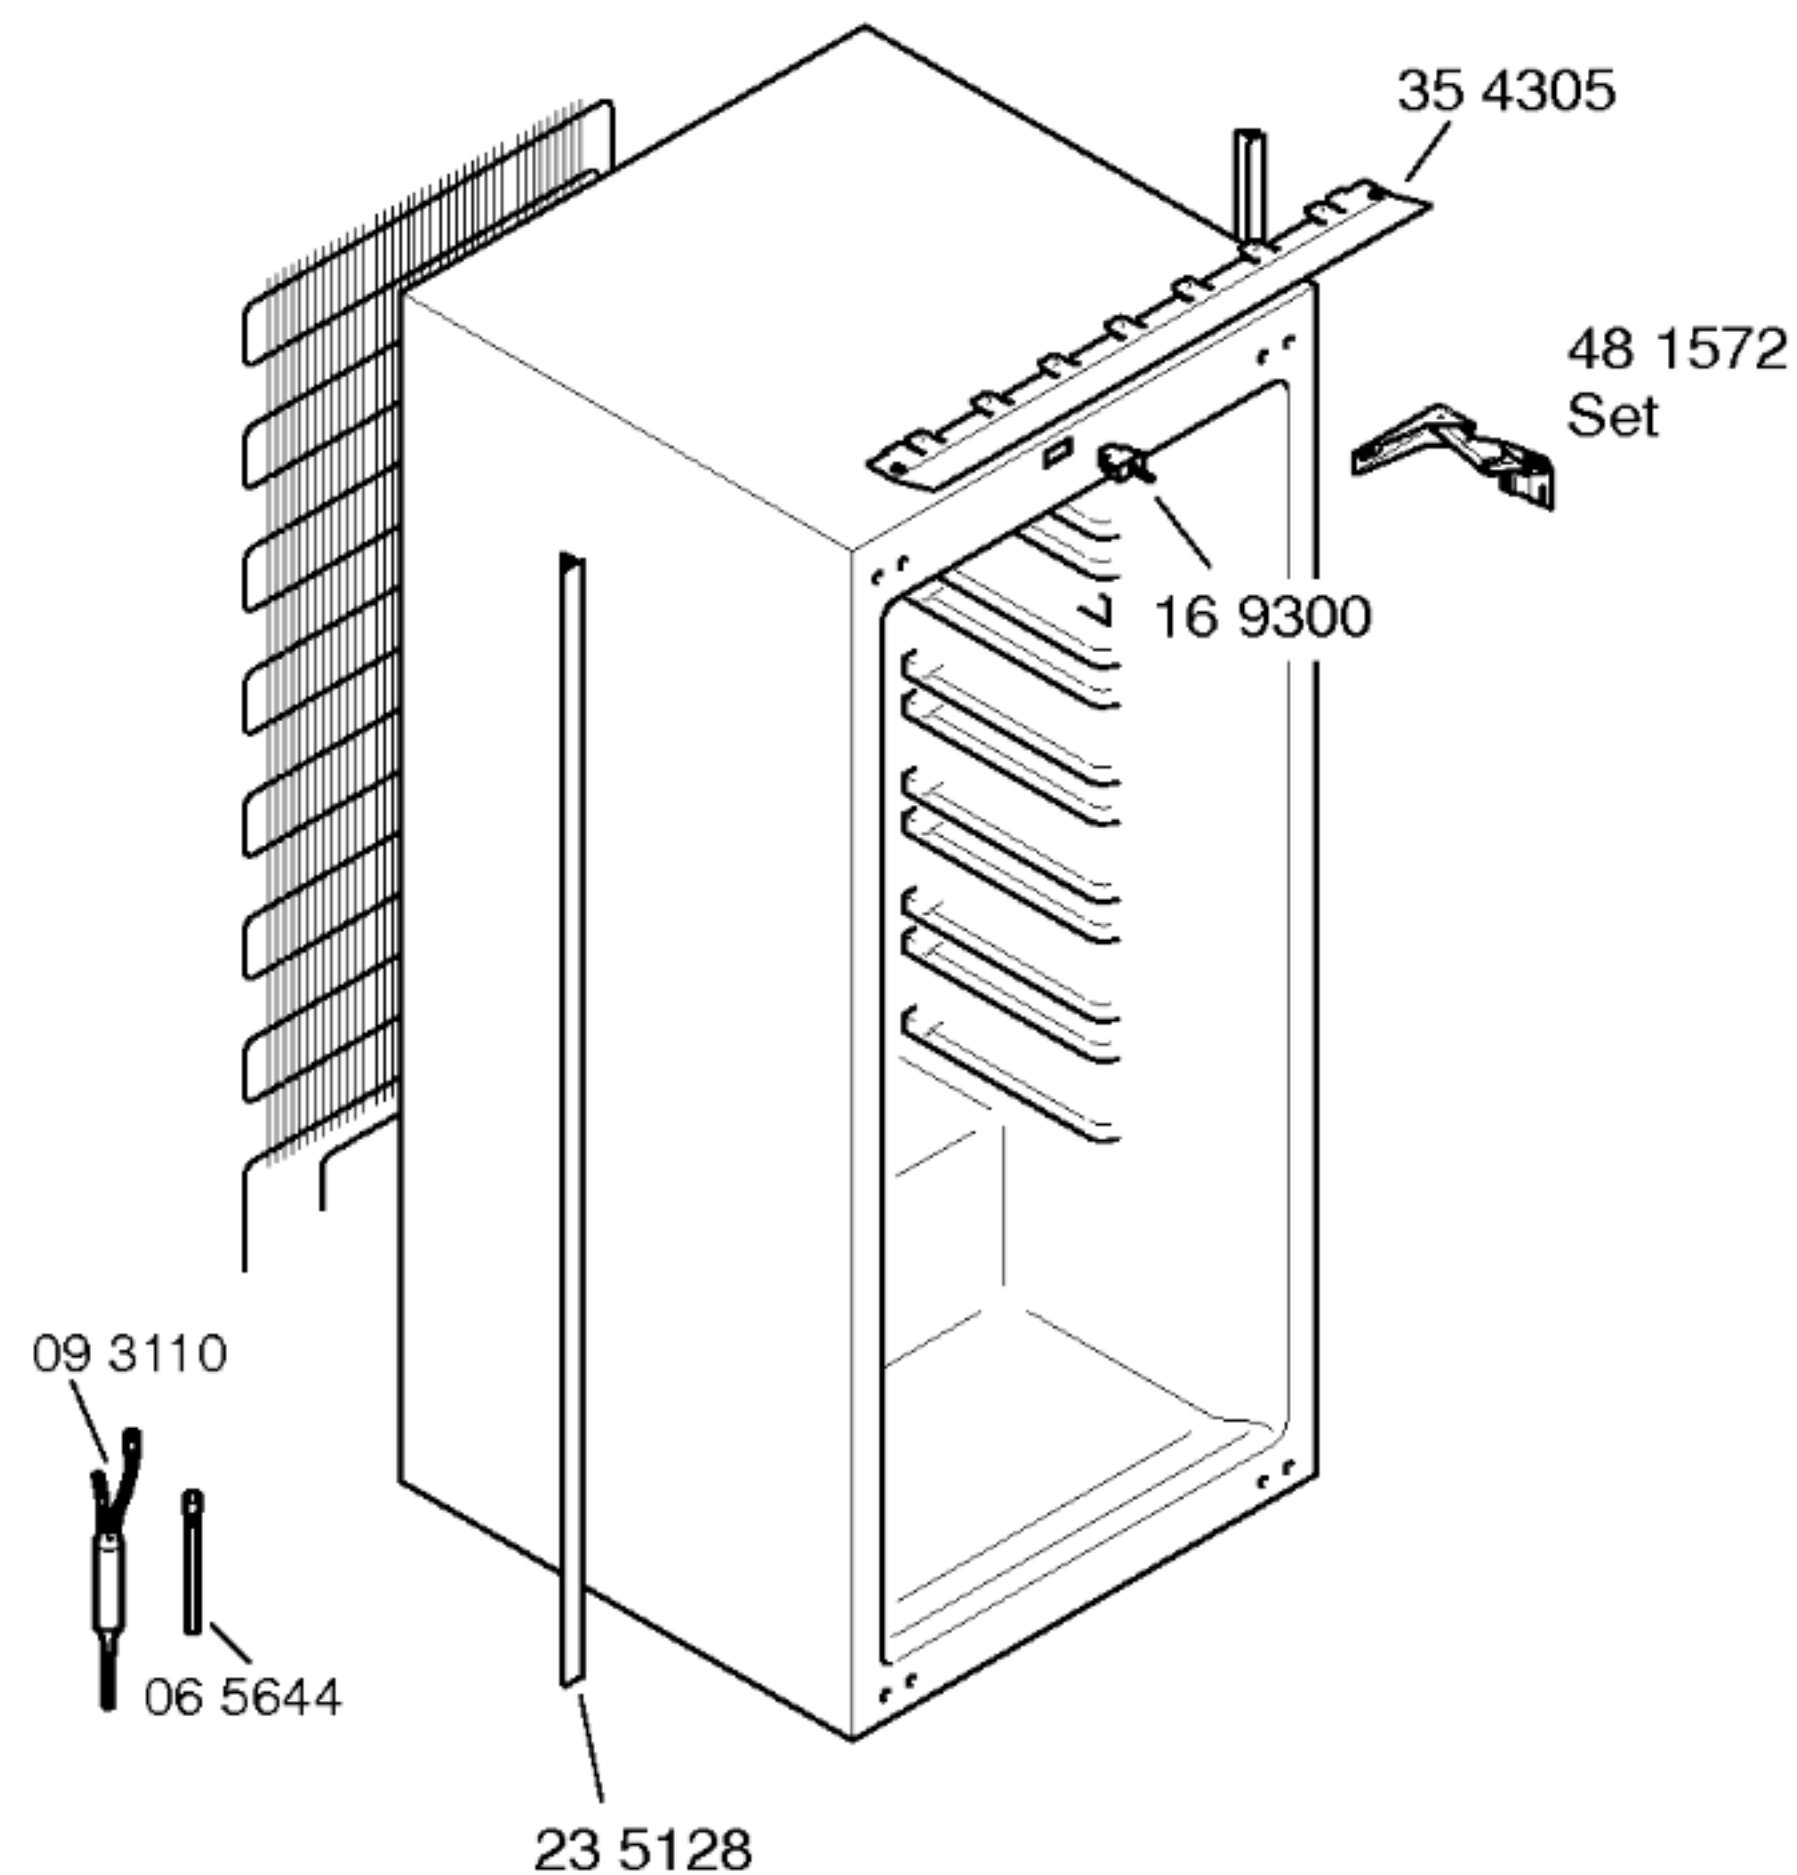

07 4445



Mat. – Nr. – Konstante
3740

Gebrauchsanweisung
52 2496
(D,GB,F,I,NL)

Montageanleitung
52 3227
(D,GB,F,I,NL,DK,N,SF,
SE,TR)

Listerien Rep.Satz
41 7589

Beistellsatz
26 6056

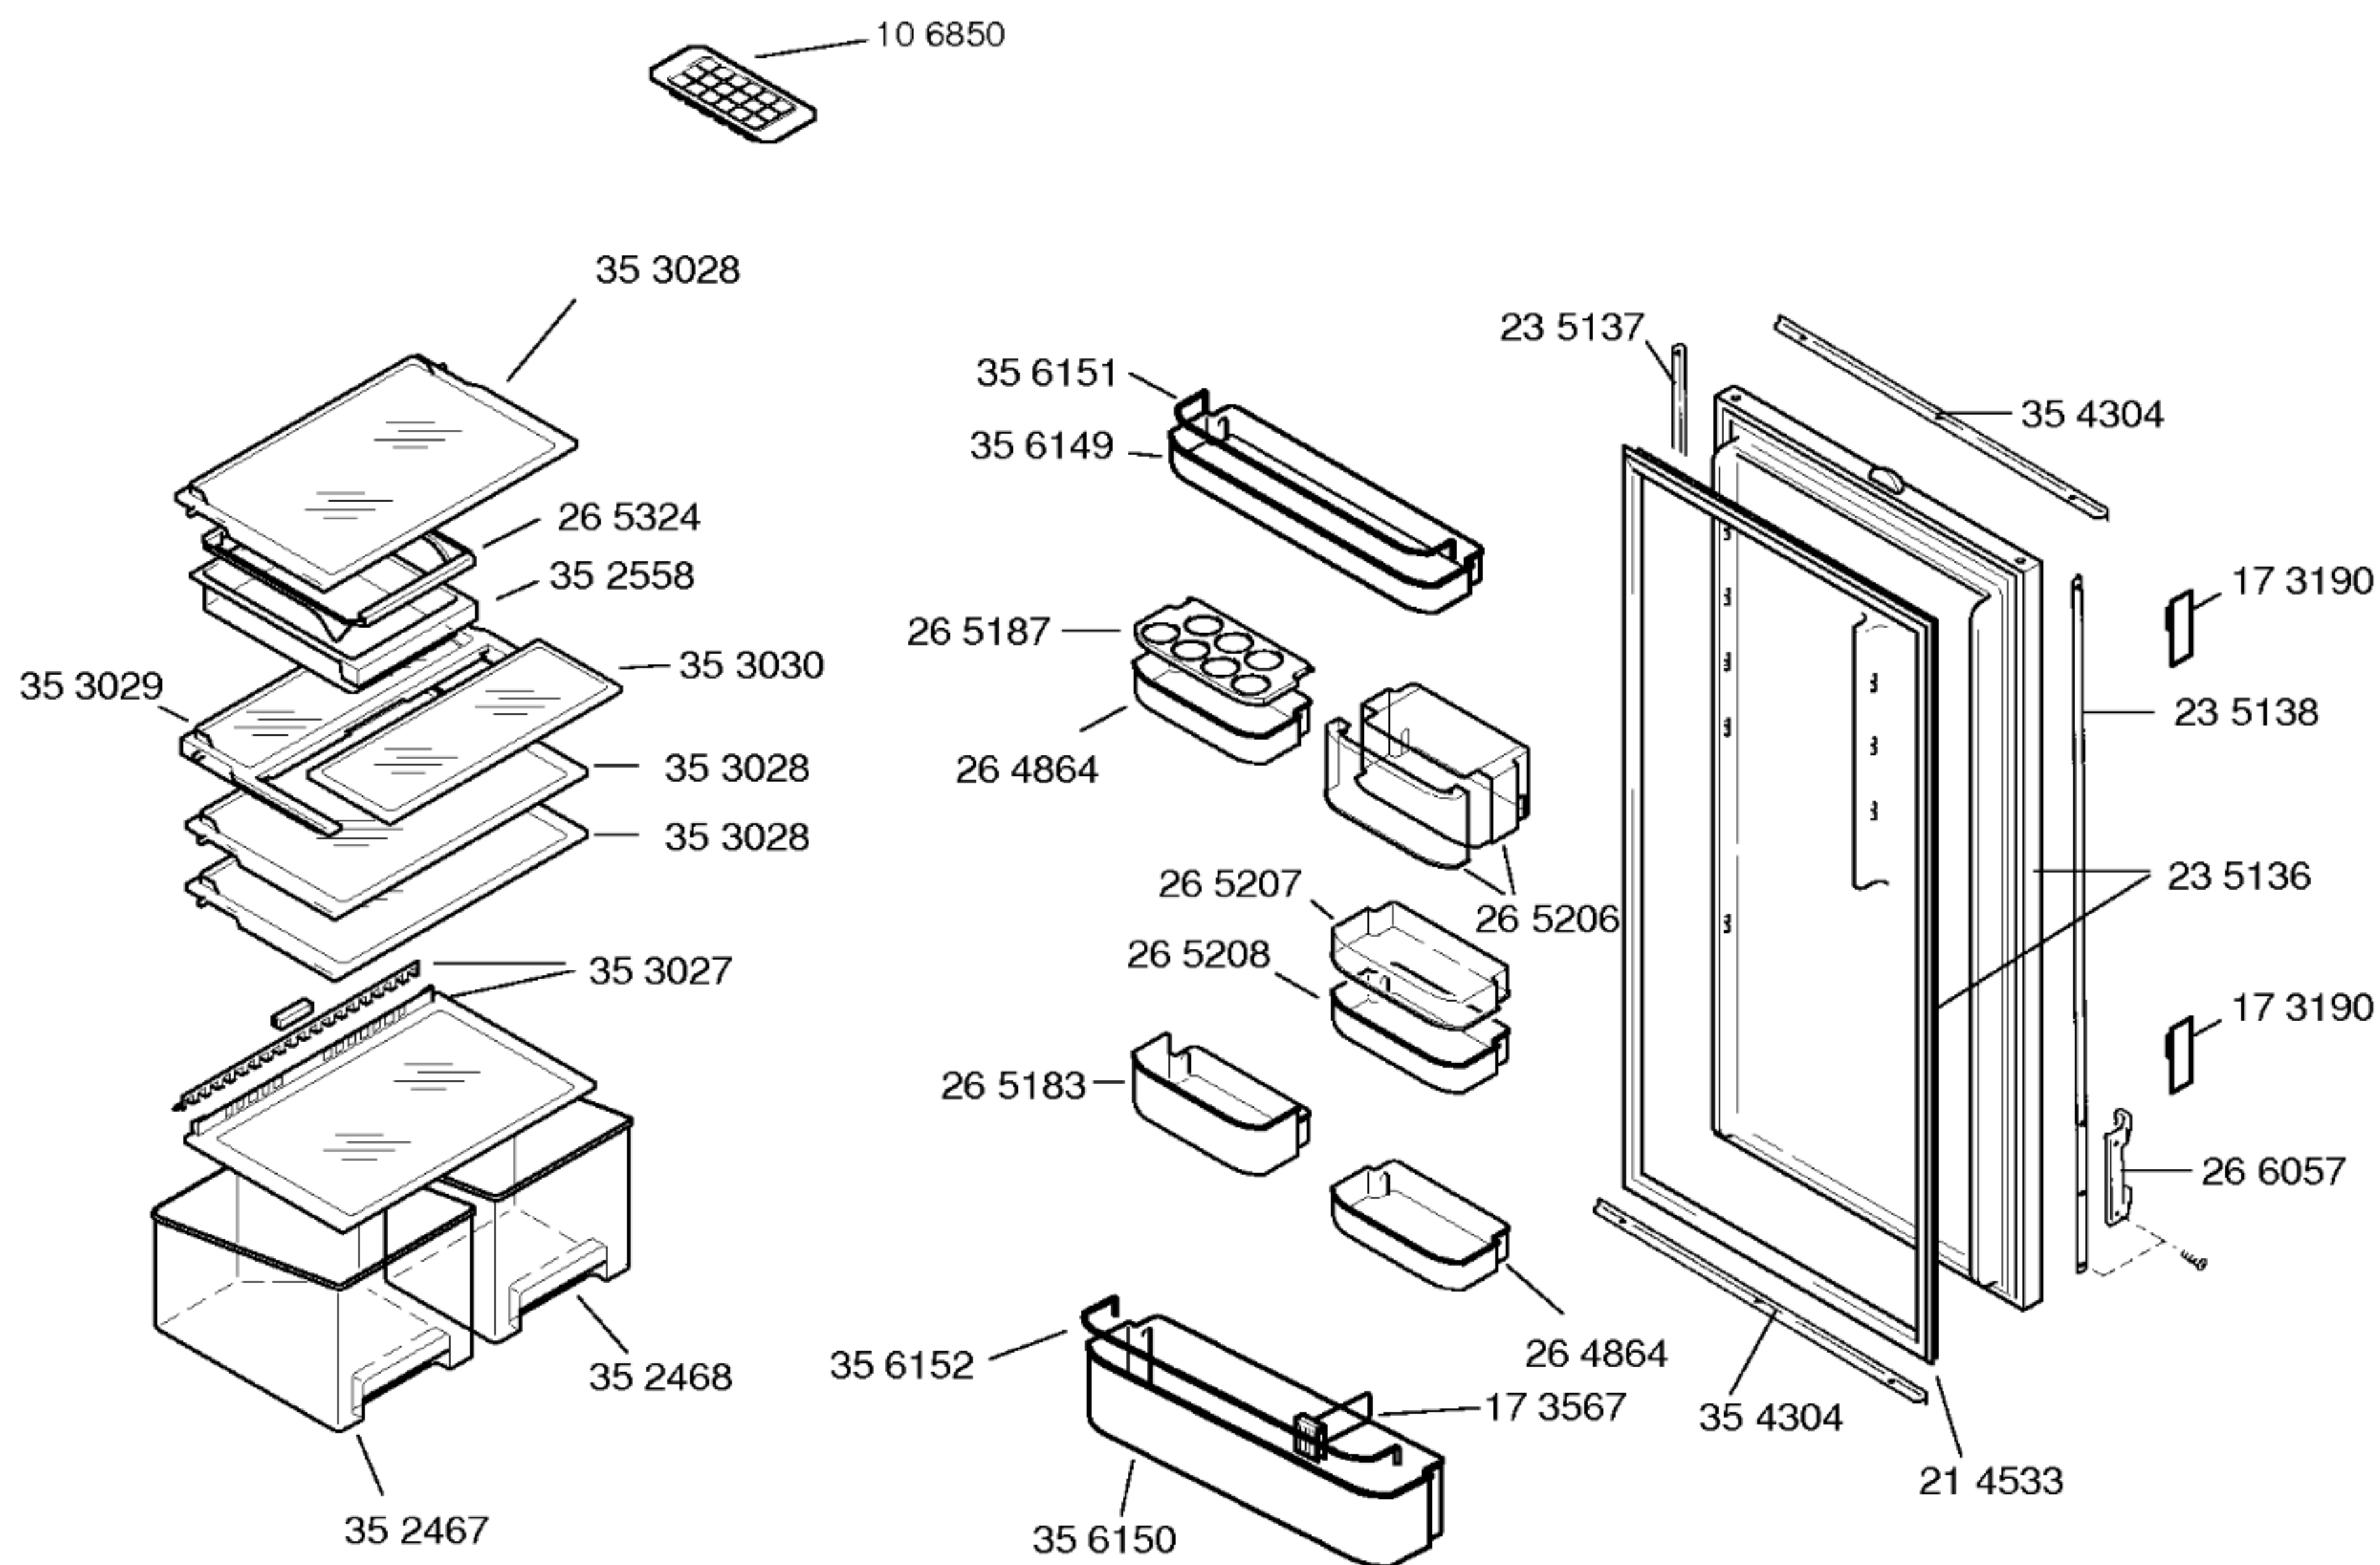

Mat. – Nr. – Konstante
3740

Ausgleichsblenden

braun

KSZ1288 37mm

KSZ1289 41mm

KSZ1280 57mm


ALU

KSZ1281 37mm

KSZ1282 41mm

KSZ1283 57mm

Torx-Schraube 3,5x16
für Dekorrahmen
17 3166

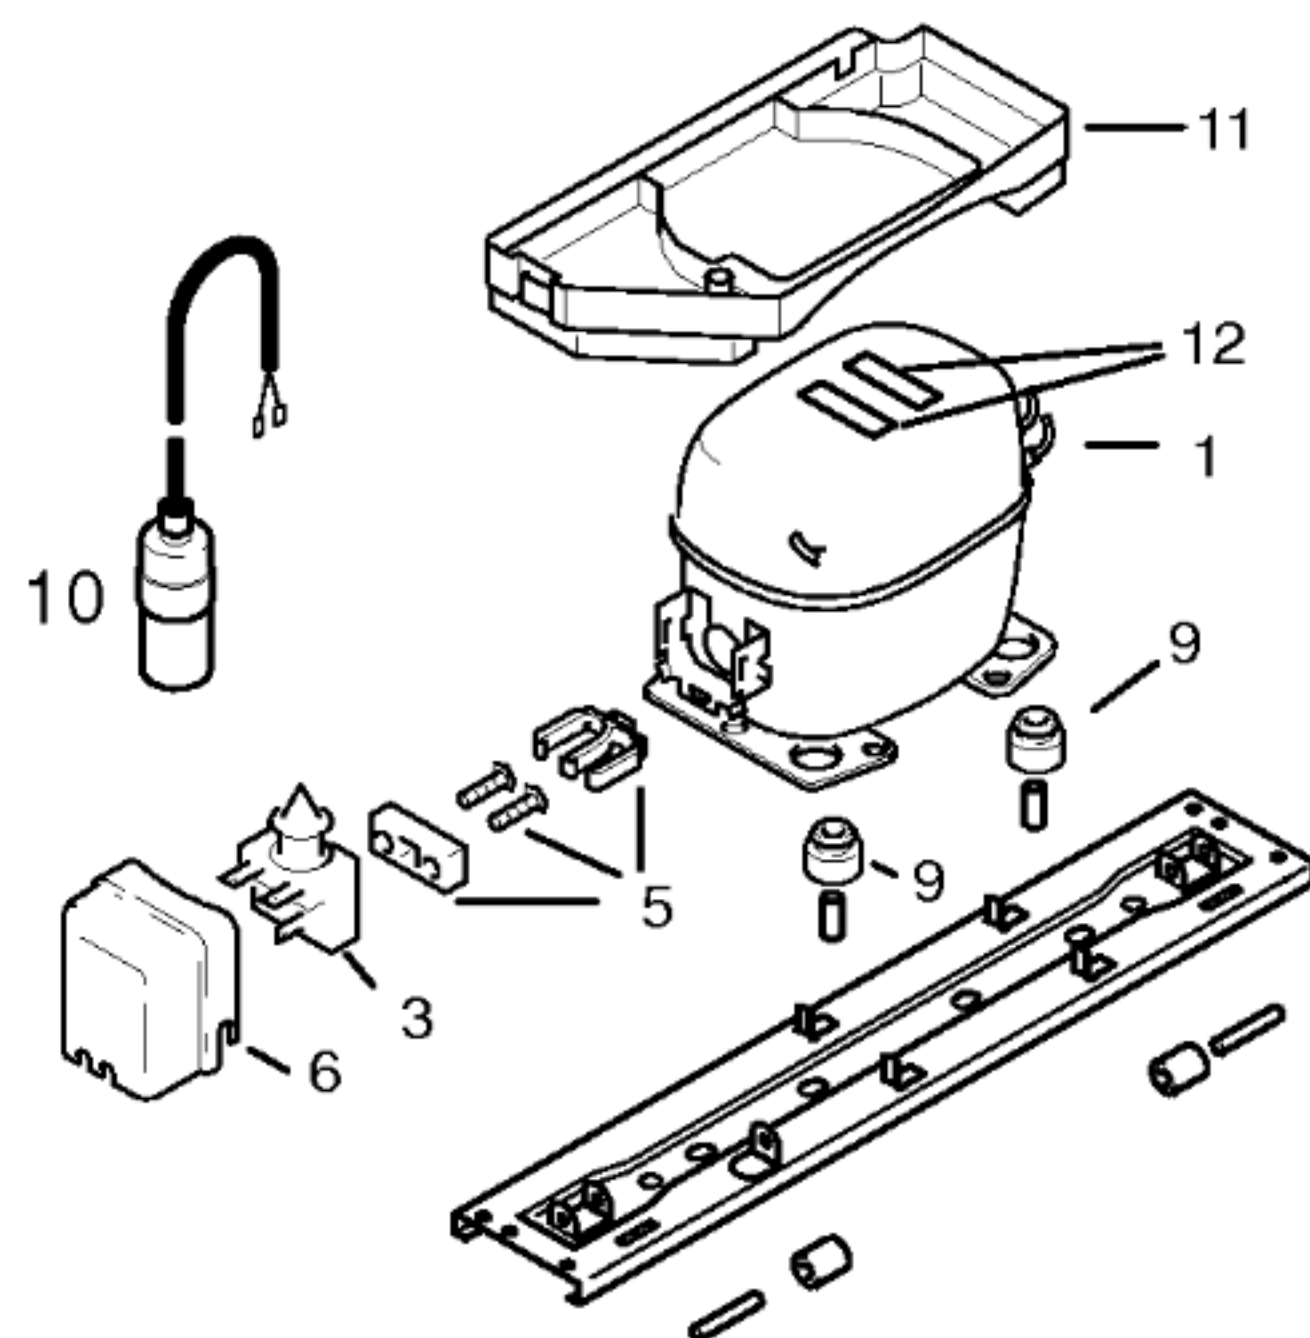Mat. – Nr. – Konstante
3740

Pos.	V01		
	Danfoss		
	TLY 4 KK2		
1	14 2057		
2			
3	15 1055		
4	15 1053		
5	15 0760		
6	15 1072		
7	16 9319		
8	26 4879		
9	05 0166		
10	16 5852		
11	36 5099		
12			

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Danfoss		
Typ/Type		TLY 4 KK2		
Förderleistung/Delivery/Débit	l/h	695		
Anlaufstrom/Starting current/Cour de démarrage	A	5,9		
Widerstand/Resistance/Résistance Ha/main/prin	Ω	49,00		
Hi/aux	Ω	15,00		
Temp.-Regler/Thermostat				
Typ/Type				
Regelstellung/Position				
Schaltwerte/Switching values	"warm"			
Valeurs de commutation	"kalt"			
	"alarm"			
Füllmenge/Fill.quantity/Charge	R600a	*		
Anschlußwert/Conn.load/Puiss. connectée	W	44		
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance	Ω			
Leistung/Power/Puissance	W			
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance	Ω			
NTC-Fühler / Sensor				
	°C	kΩ	°C	kΩ
	+10	9,95 ±0,18	-18	43,31 ±1,10
	+5	12,70 ±0,18	-22	54,66 ±1,59
	0	16,33 ±0,16	-26	69,42 ±2,29
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance	Ω			
Spannung/Voltage/Tension	V			

* siehe Typenschild