



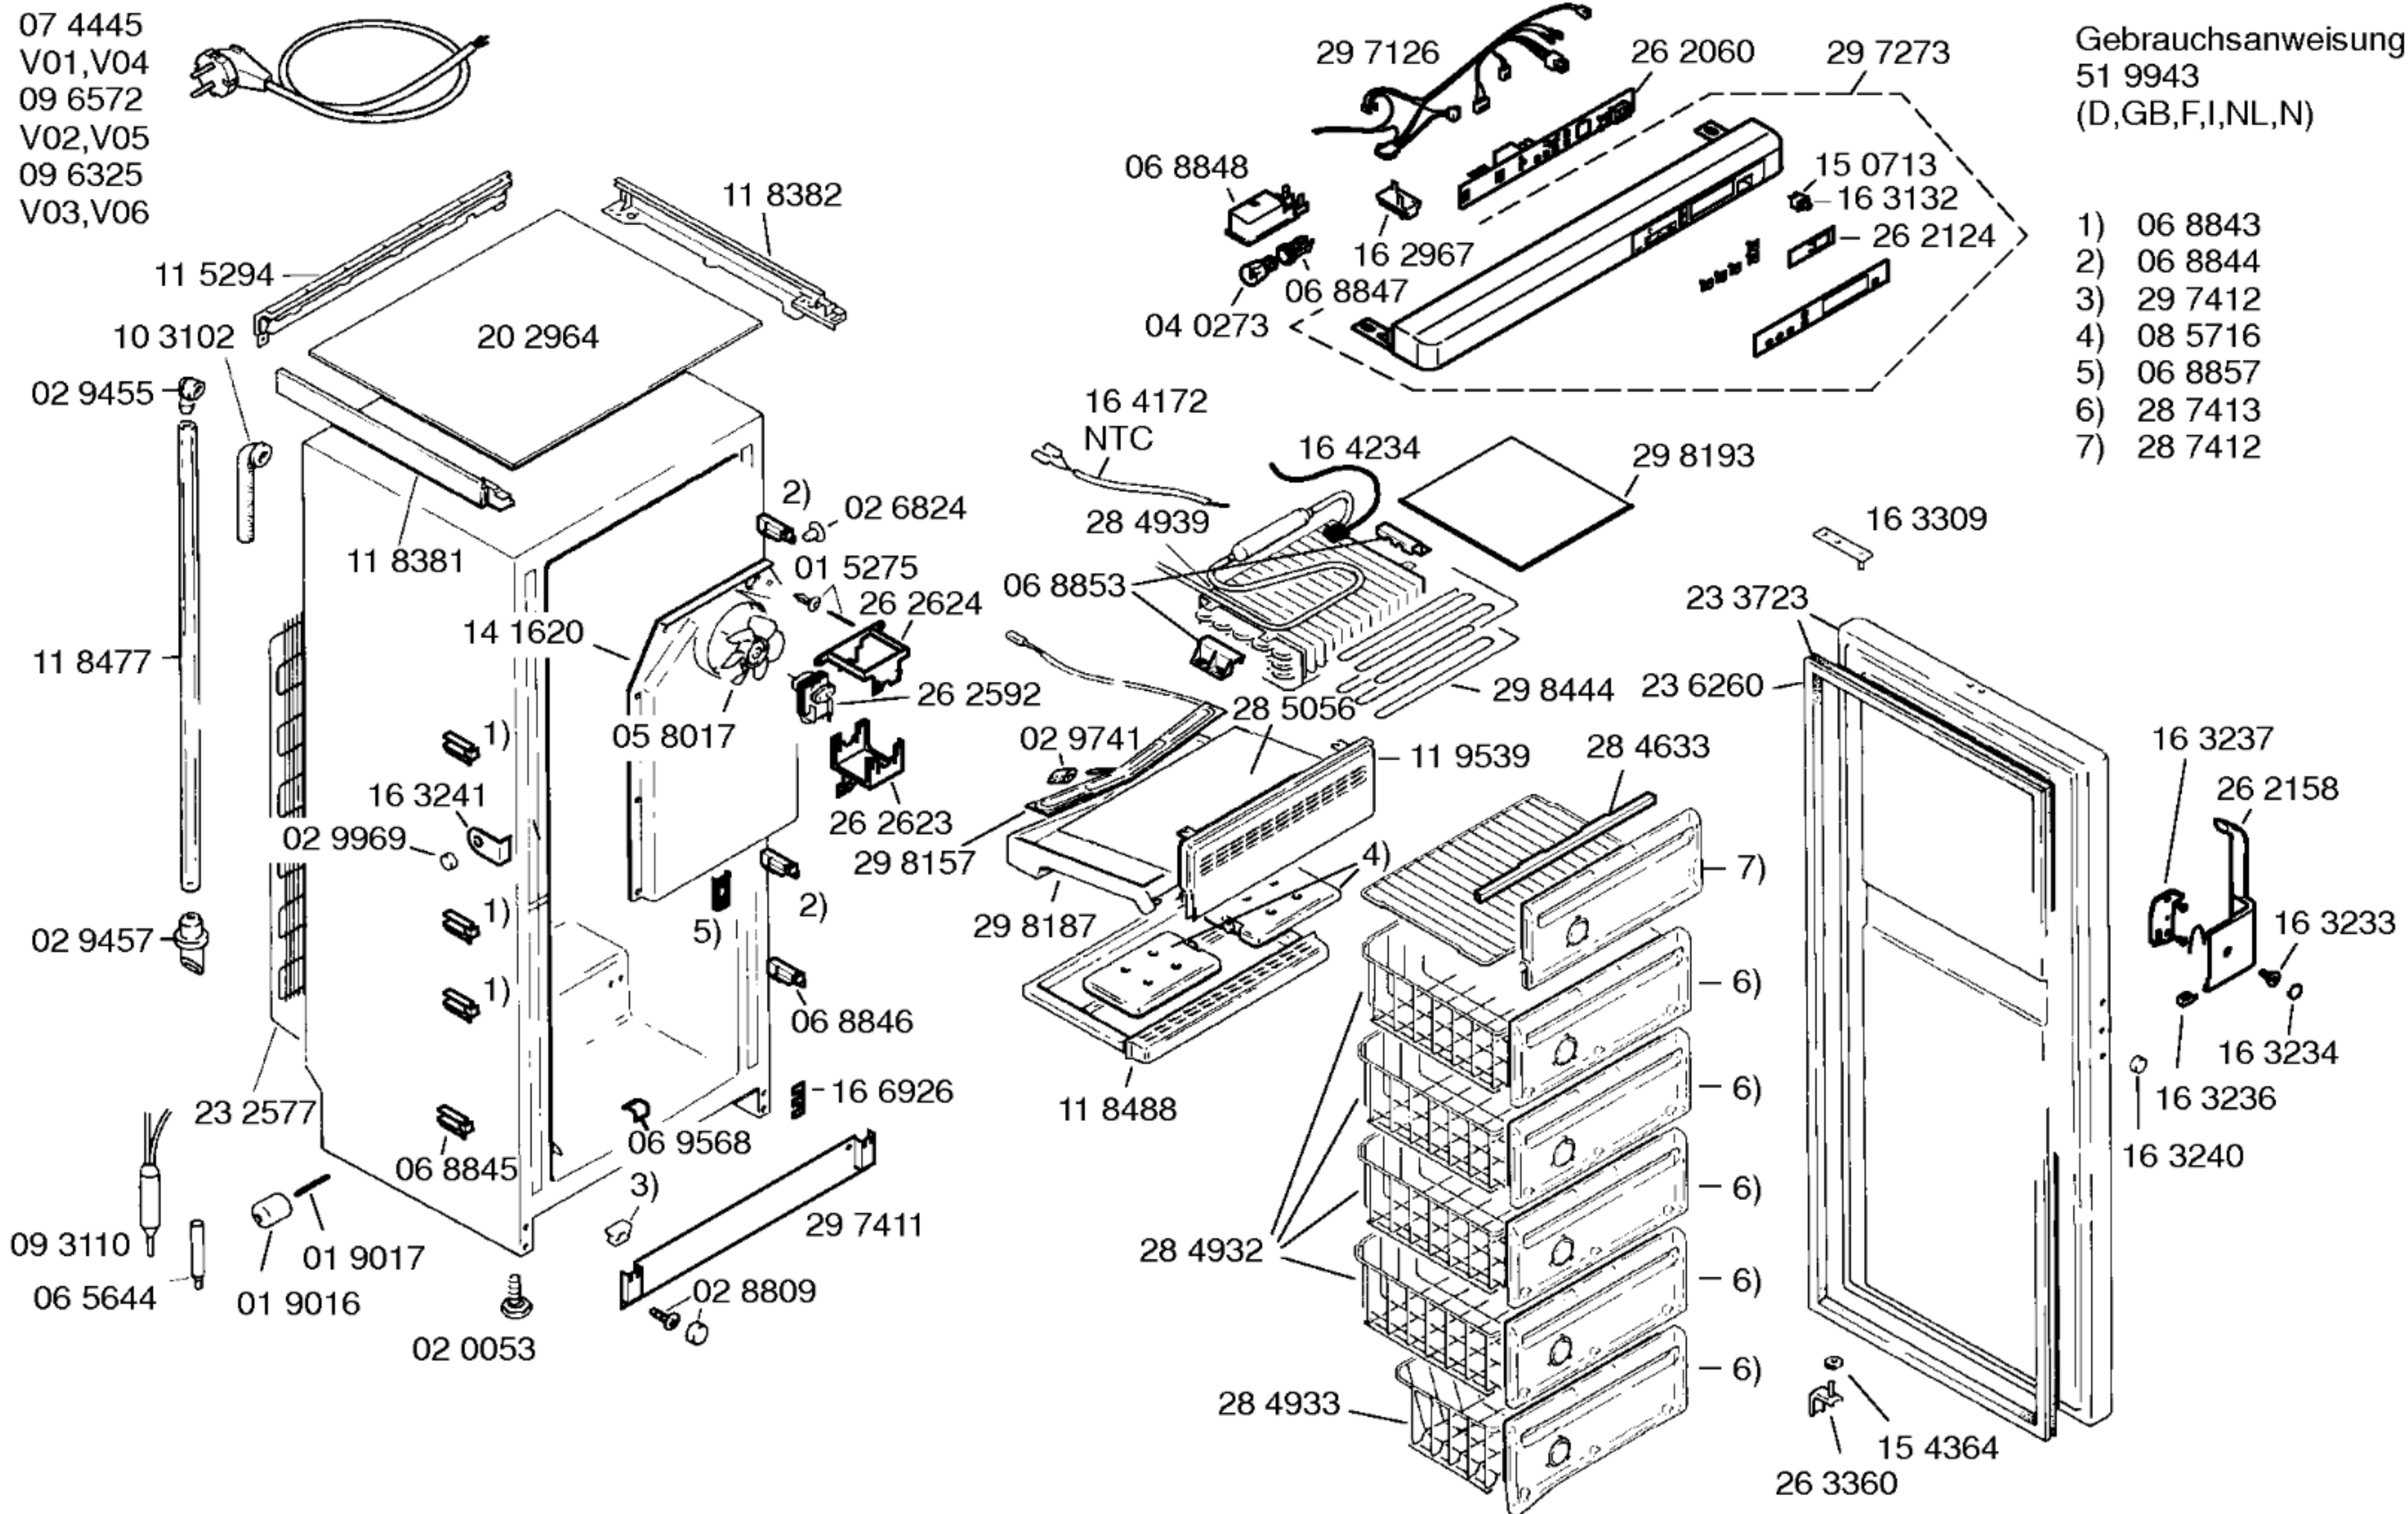

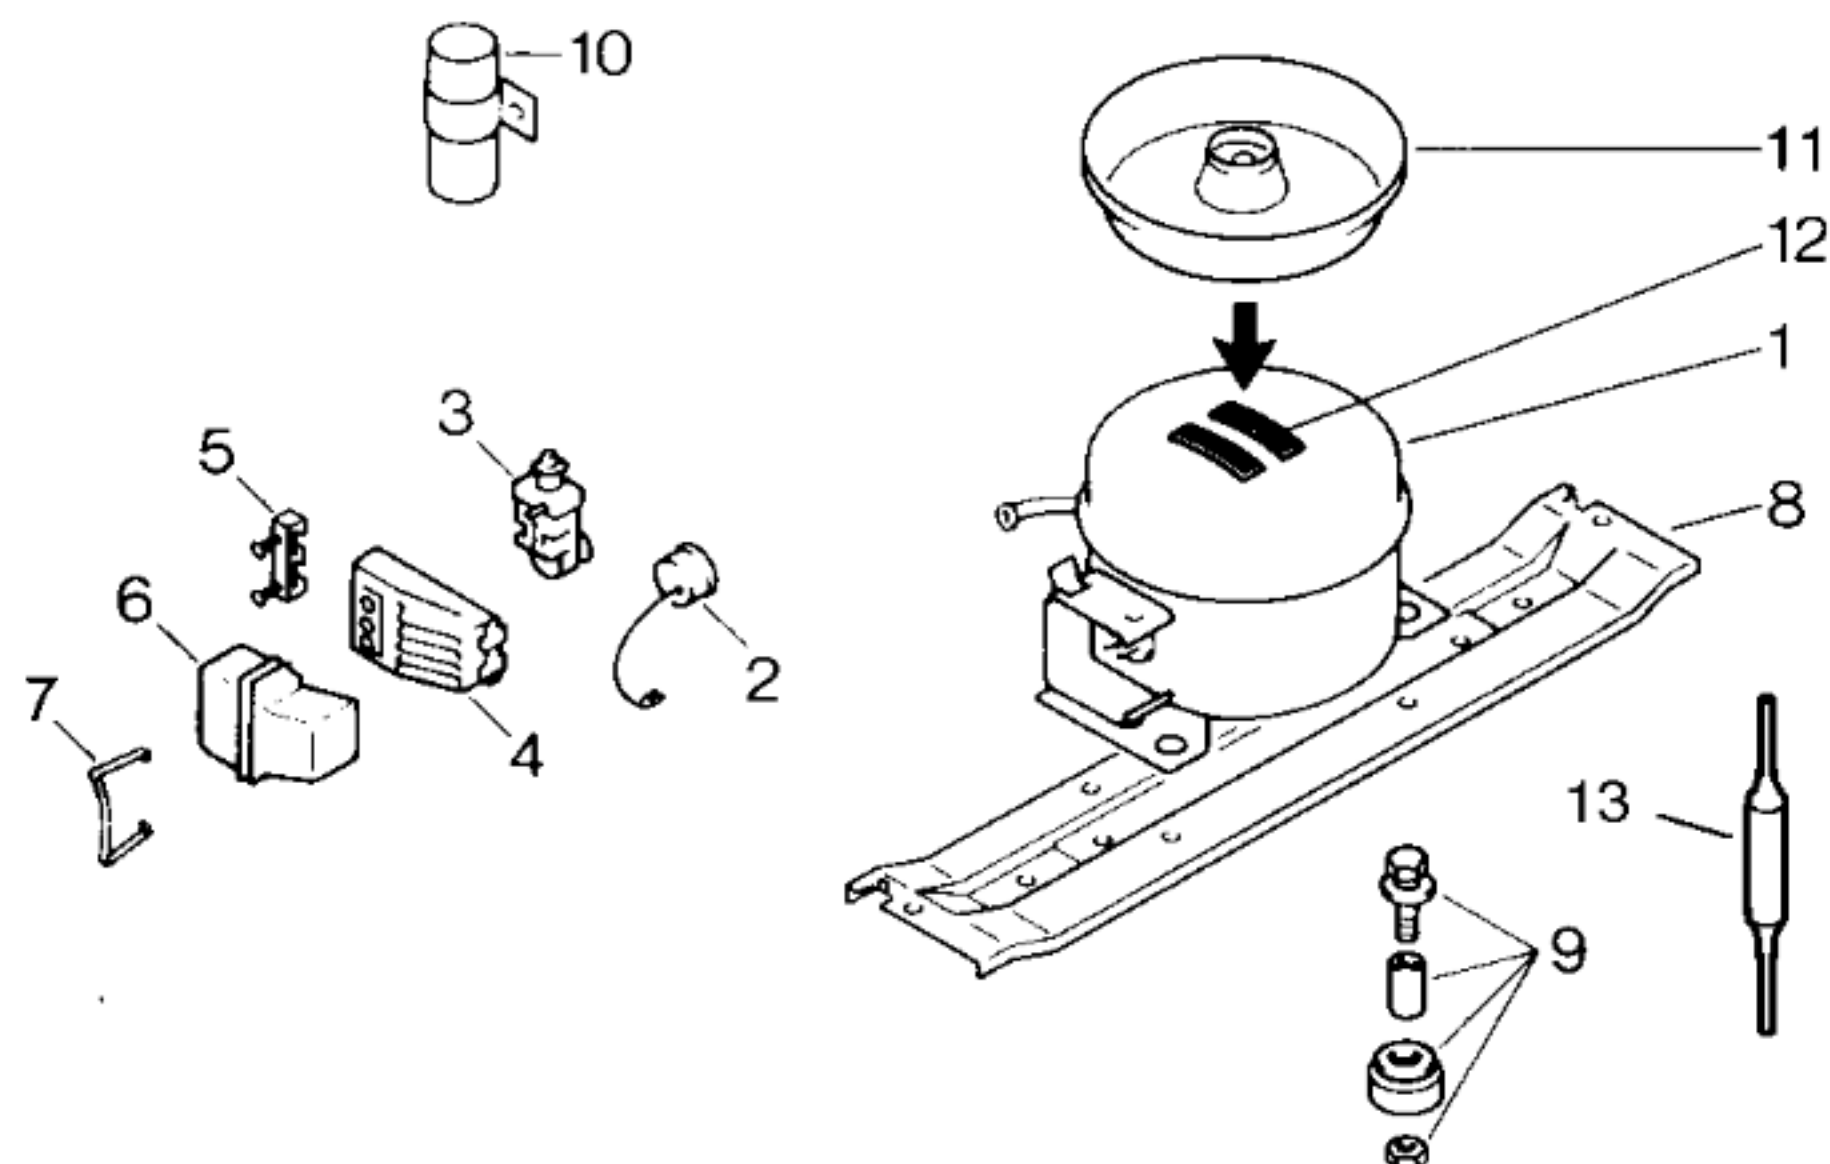

Pos.	Matsushita	Danfoss	
1	14 1556	14 1684	
2			
3	03 2035	15 1055	
4			
5	16 2549	15 0760	
6	05 8458	15 1072	
7	02 2673		
8	11 1567	27 8207	
9	05 0166	05 0166	
10	15 2222		
11	08 8535	08 8535	
12	05 6008	09 6212	
13	35 0026		

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES						
Verdichter/Compressor/Compresseur		Matsushita		Danfoss		
Typ/Type		DA 12 SE		NLY 13 K		
Förderleistung/Delivery/Débit		l/h	2250			2394
Anlaufstrom/Starting current/Cour de démarrage		A	8,7			11,3
Widerstand/Resistance/Résistance		Ω	12,0			11,0
Hi/aux		Ω	28,7			9,0
Temp.-Regler/Thermostat		°C	Elektronisch			
Solltemperatur-Einstellung			EIN	AUS		
		-18	-15	-16		
		-22	-19	-20		
		-26	-23	-24		
"alarm"			-9	-14		
Füllmenge/Fill.quantity/Charge		R600	siehe Typenschild			
Anschlußwert/Conn.load/Puiss. connectée		W	120			
Heizung/Heater/Chauffage			Abtauheizung		Rinnenheizung	
Widerstand/Resistance/Résistance		Ω	173		6050 ± 730Ω	
Leistung/Power/Puissance		W	333		9,5	
Ventilator/Blower/Ventilateur						
Widerstand/Resistance/Résistance		Ω	340			
Widerstand NTC-Fühler		°C	kΩ	°C	kΩ	°C
		-1	17,3	-15	36,5	-20
		-9	26,2	-16	38,8	-23
		-14	34,5	-19	45,9	-24
Magnetventil/Magnetic valve/Electrovanne						
Widerstand/Resistance/Résistance		Ω				
Spannung/Voltage/Tension		V				