



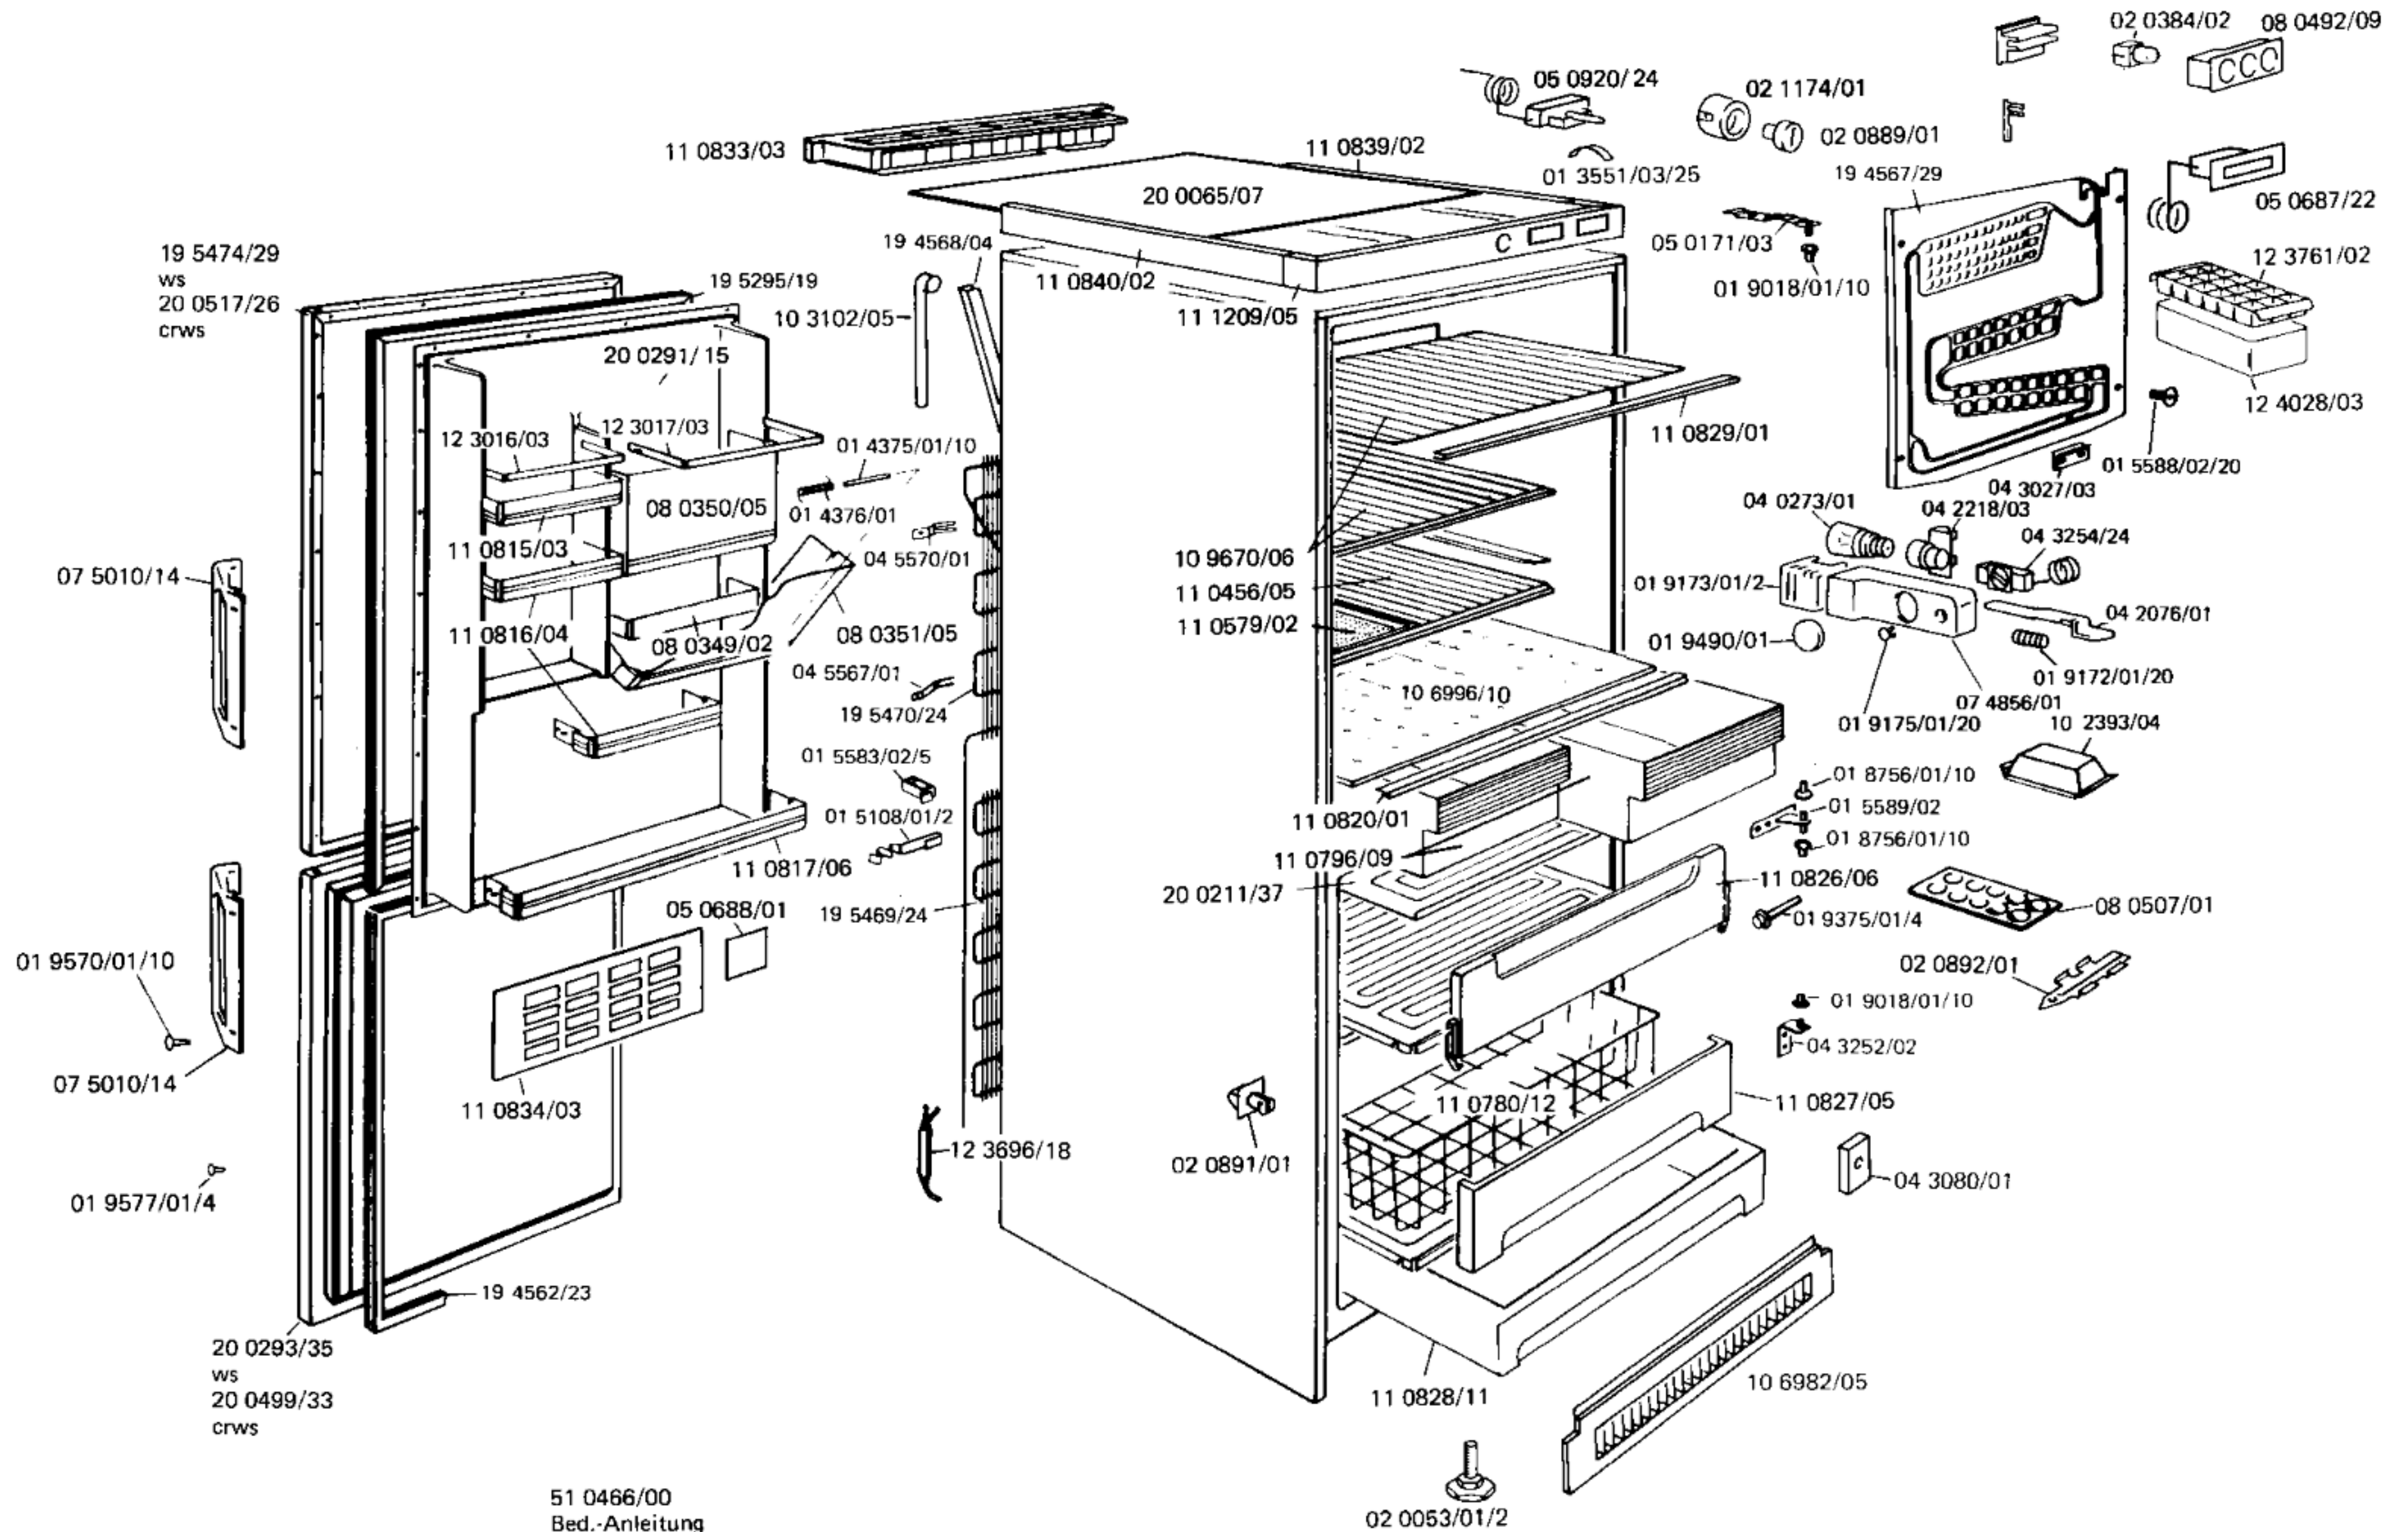

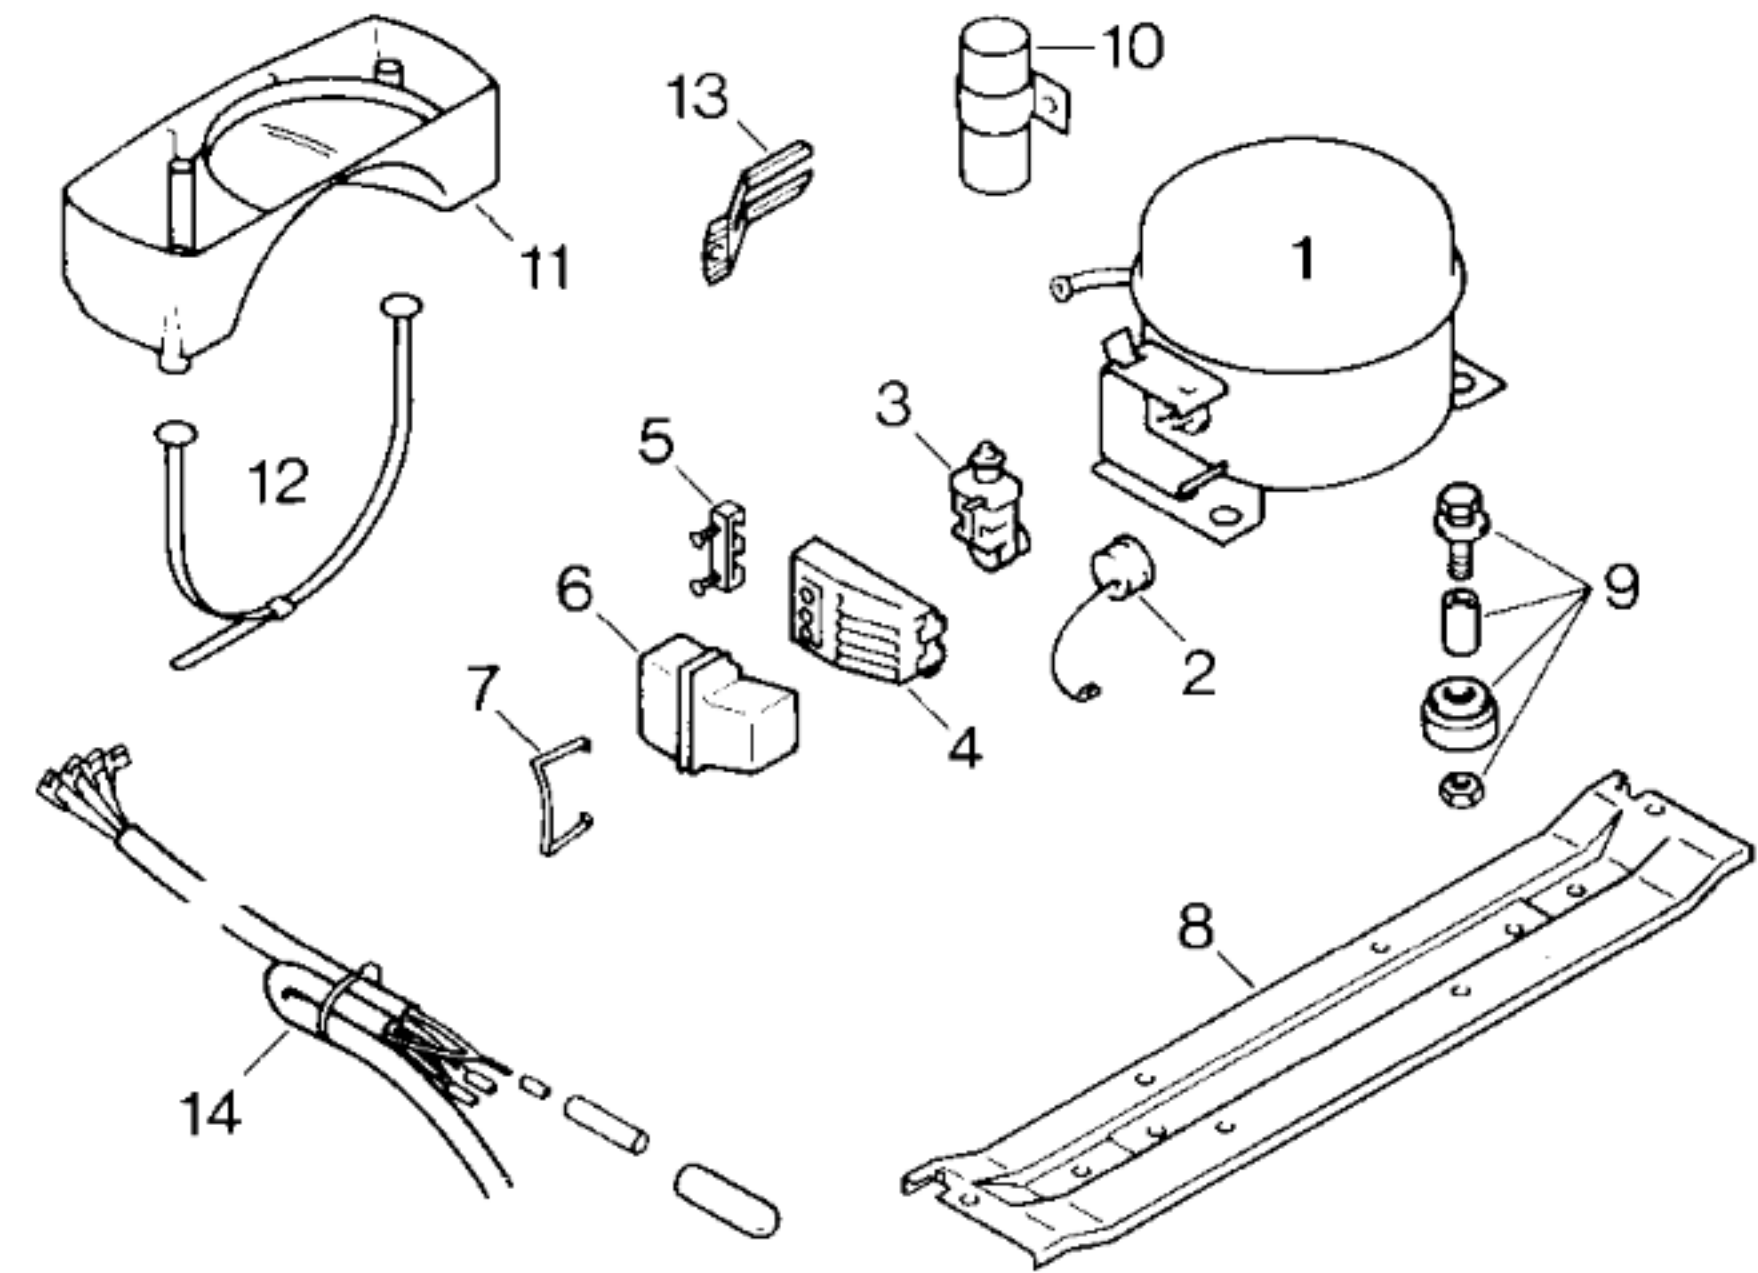

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES					
Verdichter/Compressor/Compresseur	KS	GS	KS	GS	
Typ/Type	Bosch	Bosch	Danfoss	Danfoss	
Förderleistung/Delivery/Débit	V 612	V 1040	702	920	
Anlaufstrom/Starting current/Cour. de démarrage	6,4	9,5	7,8	9,0	
Widerstand/Resistance/Résistance	28,0	15,0	23,8	15,7	
Hi/aux	39,0	29,0	17,0	18,8	
Temp.-Regler/Thermostat	M + J		Ranco		
Typ/Type					
Reglerstellung/Position	kalt	warm	kalt	warm	
Schaltwerte/Switching values/	+ 4	+ 4	- 23	- 17	
Valeurs de commutation	- 24	- 10	- 31	- 24	
(„abtauen“ od.)	„alarm“		- 18	- 13	
Füllmenge/Fill.quantity/Charge	R12	g	85	150	85 150
Anschlußwert/Conn.load/Puiss. connectée	W	210			
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance	Ω				
Leistung/Power/Puissance	W				
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance	Ω				
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance	Ω				
Spannung/Voltage/Tension	V				

Pos.	KS	GS	KS	GS
	Bosch	Bosch	Danfoss	Danfoss
1	13 0822/44	13 0665/45	13 1064/45	14 0065/45
2	07 1691/18	07 2131/18		
3	07 1692/18	07 3899/09	02 0108/27	02 0108/27
4	04 9757/02			
5				
6	04 9758/02		05 1413/06	05 1413/06
7				
8				
9	05 0166/05			
10				
11	10 6693/03		*11 1243/01	
12				
13				
14			*05 1226/08	*05 1226/08

*) Bei Ersatz des Bosch-Verdichters mitbestellen
To be ordered when replacing the Bosch compressor
A commander lors du remplacement du compresseur Bosch