



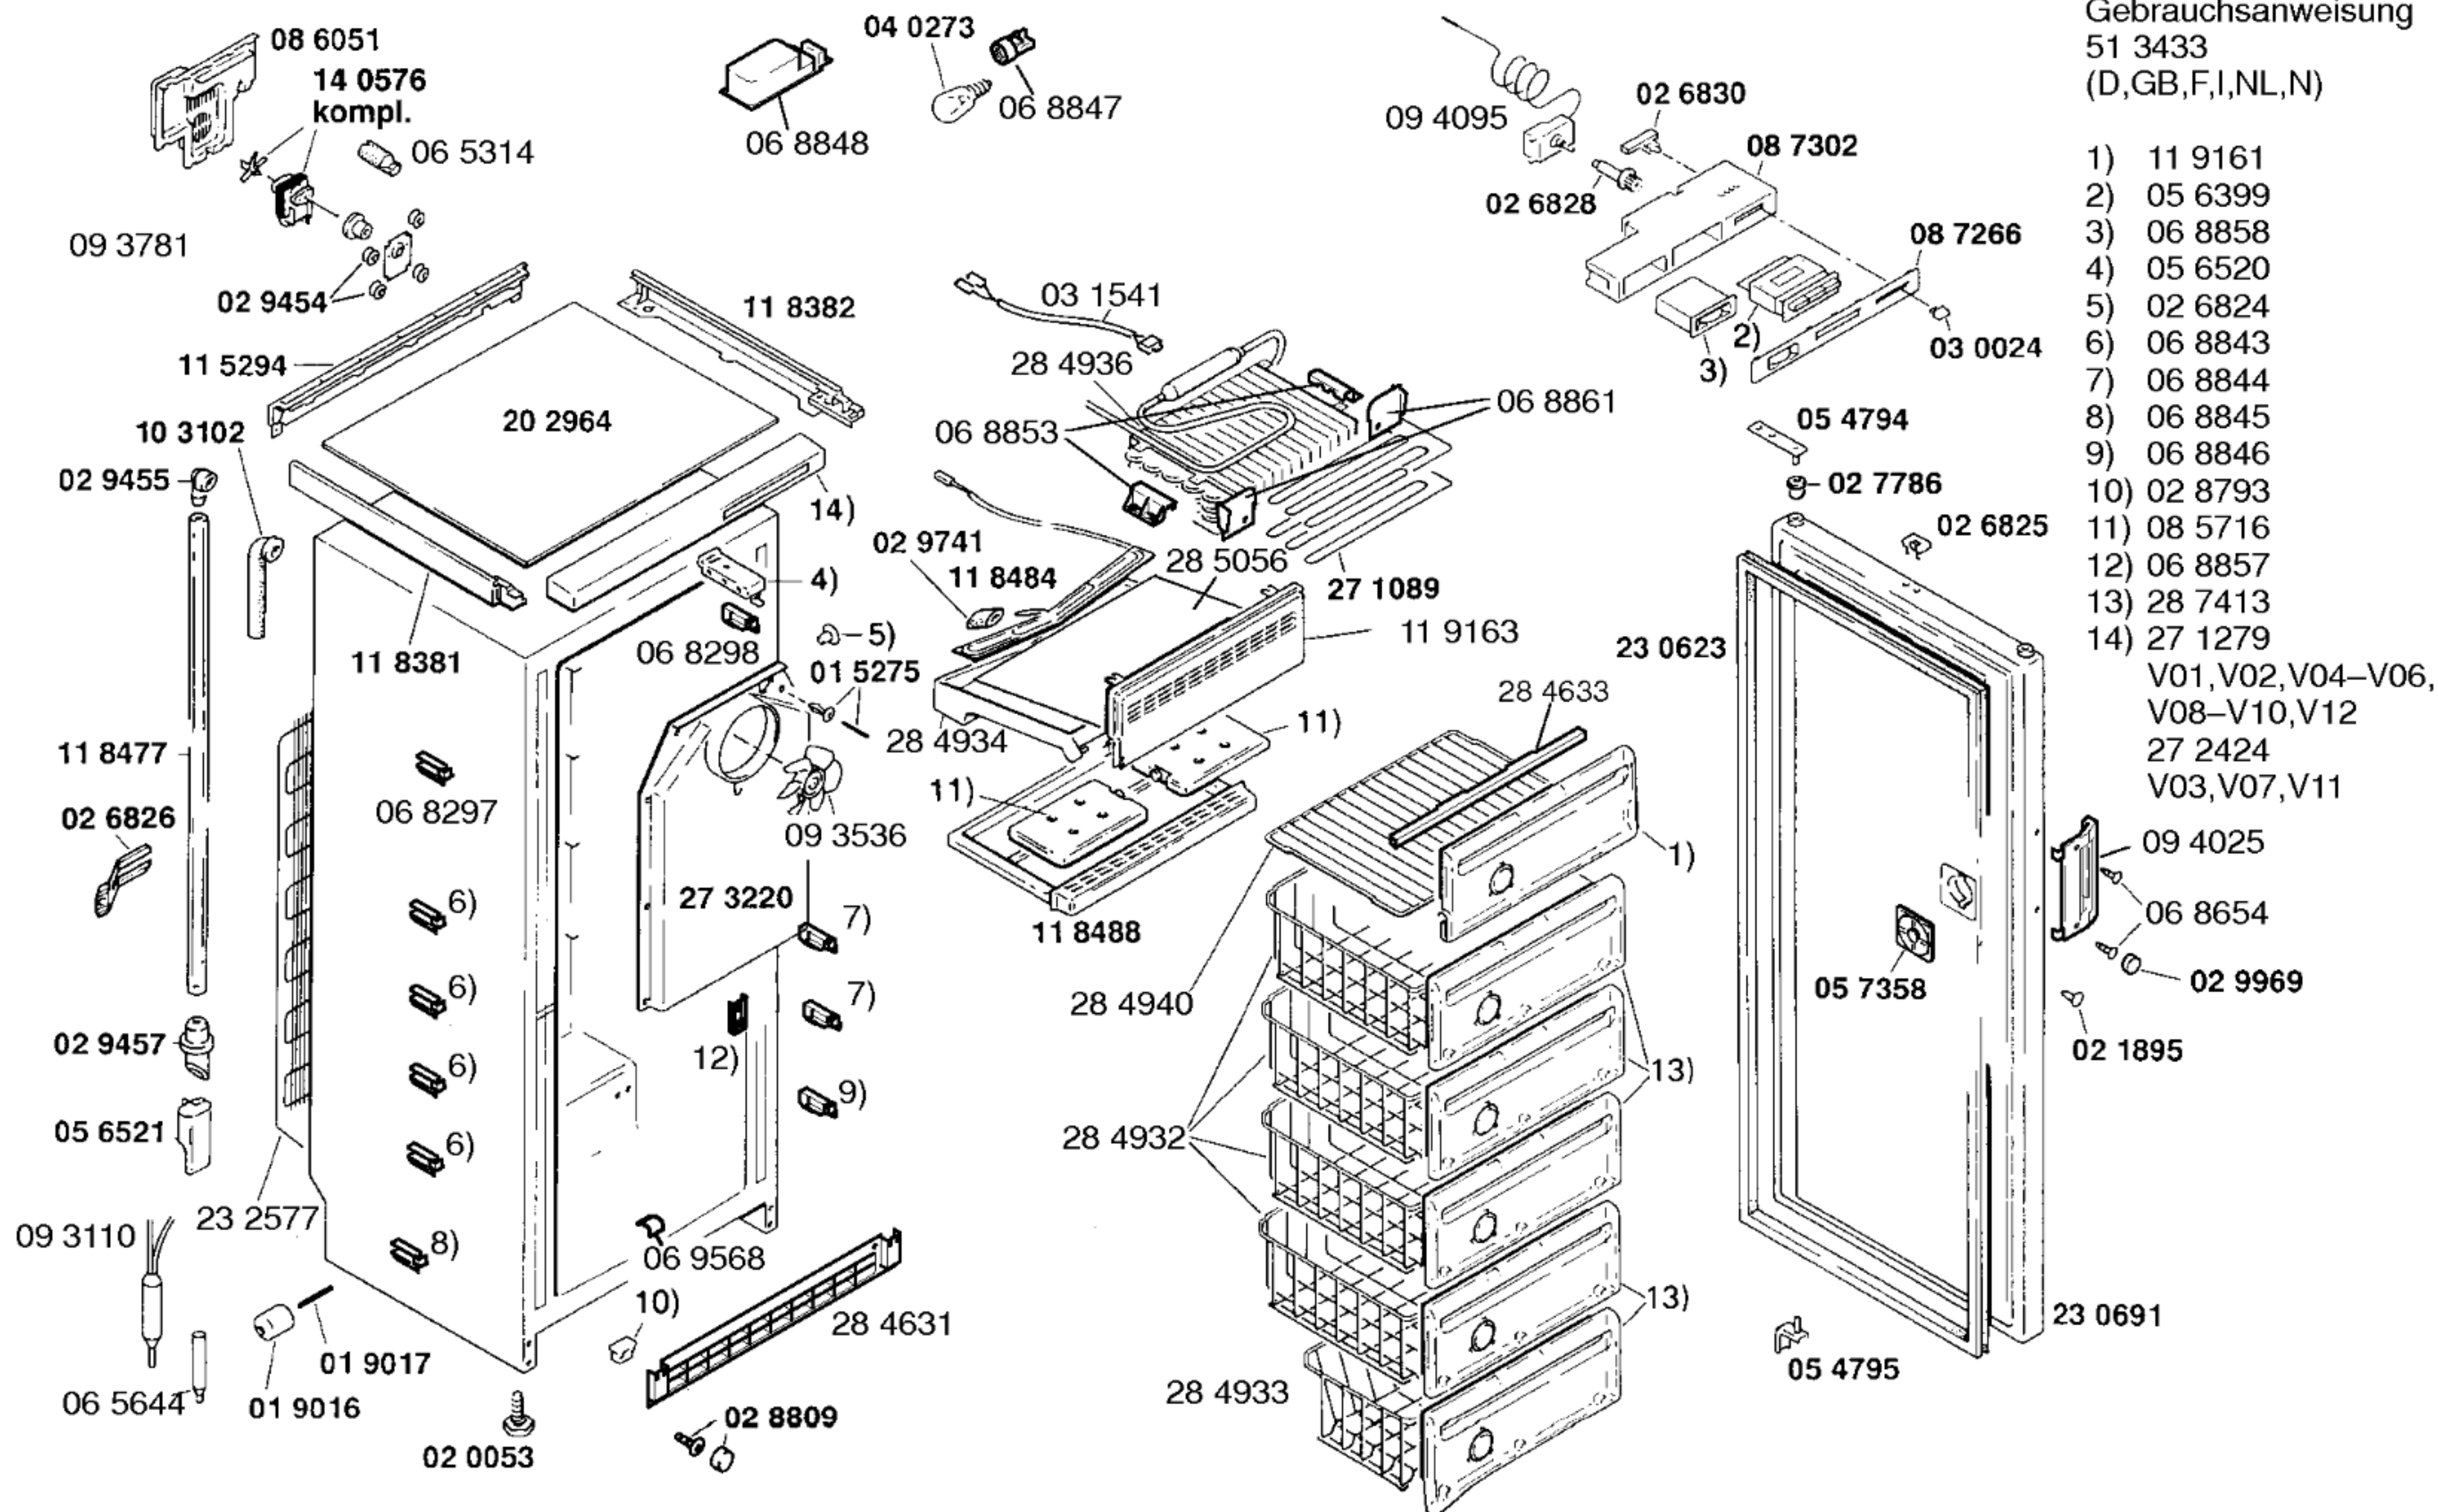

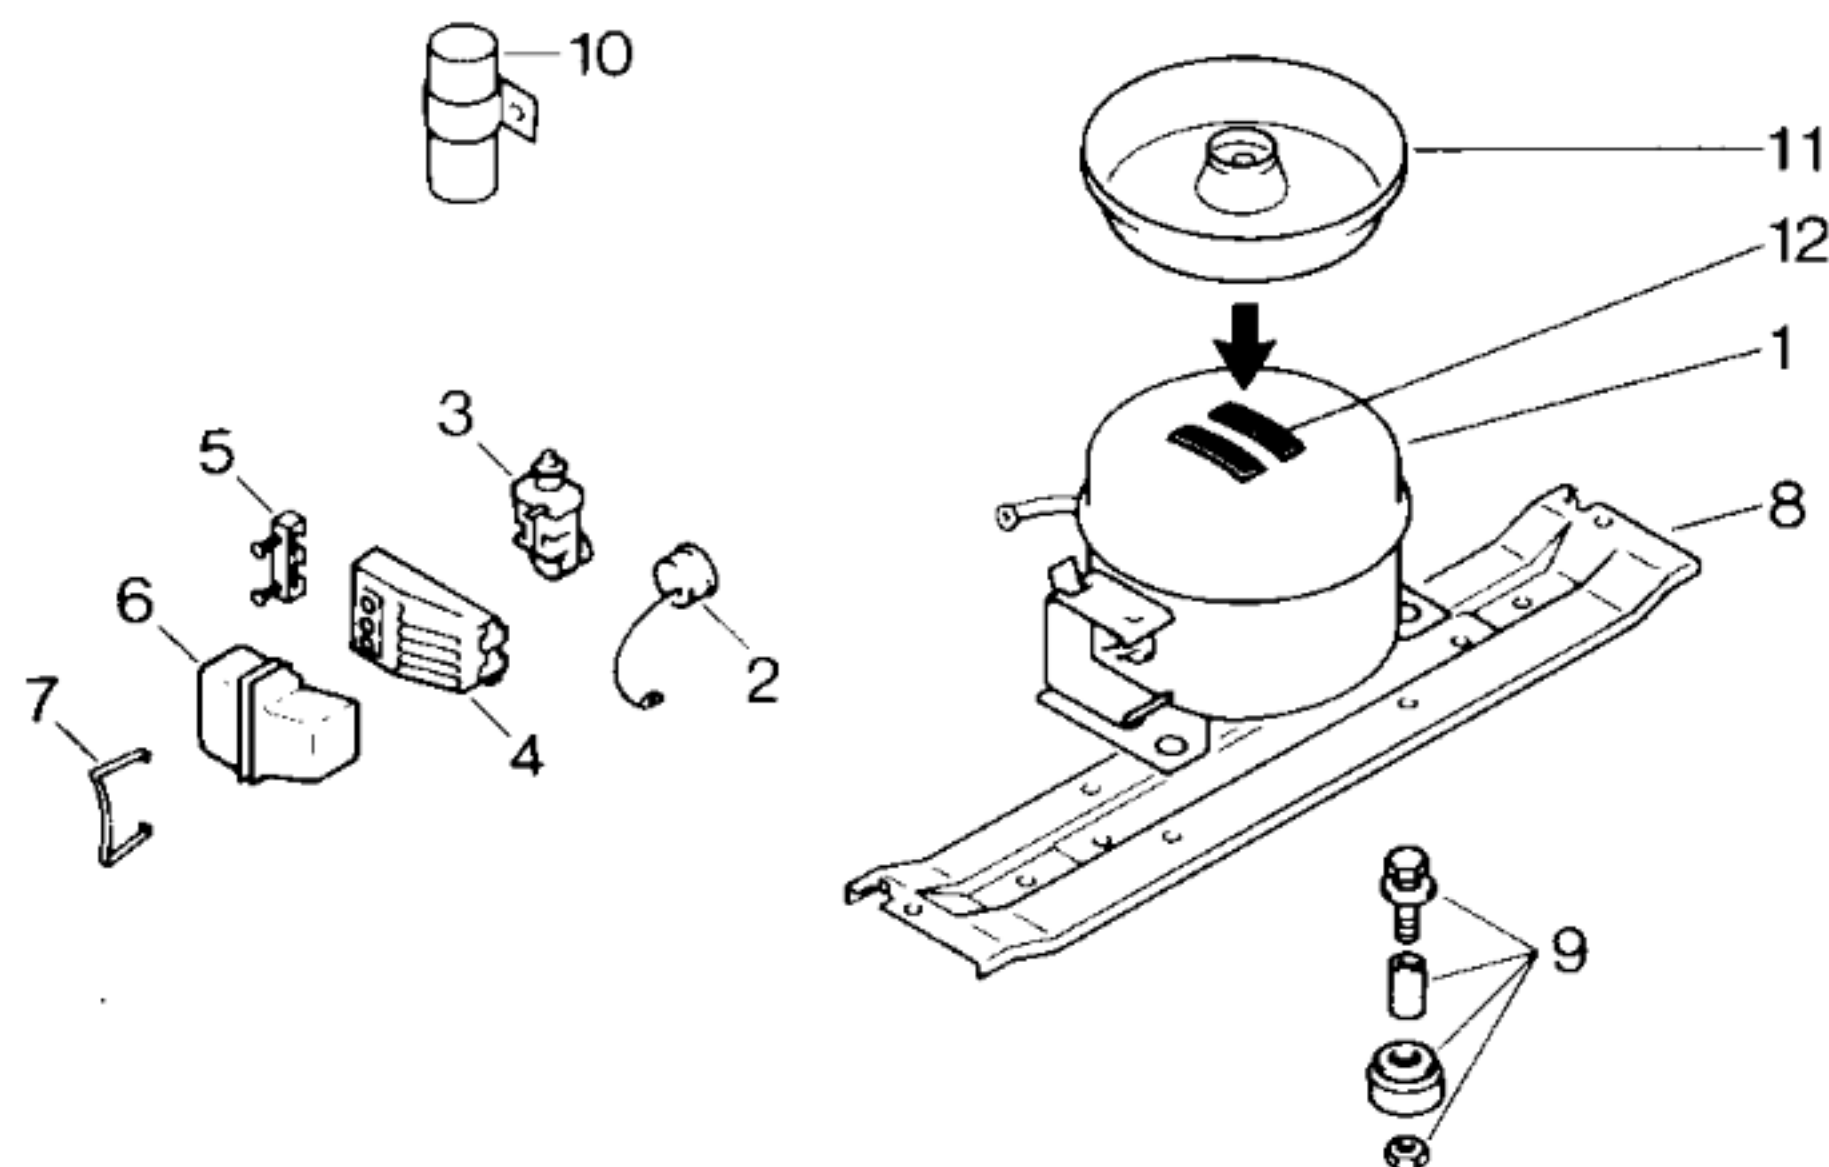

	V01-V07	V08-V12	
Pos.	Matsushita	Danfoss	
	D77C15RAW	NLE 9 F	
1	14 1254	14 1554	
2			
3	03 2790	16 2109	
4	05 5516		
5		15 0760	
6	05 8458	15 1072	
7	02 6731		
8	11 9114	11 9114	
9	05 0166	05 0166	
10	05 9467	05 9467	
11	08 8535	28 1828	
12	05 6008	05 6008	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Matsushita	Danfoss	
Typ/Type		D77C15RAW	NLE 9 F	
Förderleistung/Delivery/Débit	l/h	1184	1503	
Anlaufstrom/Starting current/Cour de démarrage	A	9,2	10,5	
Widerstand/Resistance/Résistance	Ha/main/prin. Ω	11,0	13,0	
	Hi/aux Ω	26,7	17,6	
Temp.-Regler/Thermostat		Danfoss		
Typ/Type		2156		
Reglerstellung/Position		kalt	warm	
Schaltwerte/Switching values/	„ein“ $^{\circ}\text{C}$	-26,9	-20	
Valeurs de commutation	„aus“	-33,5	-25	
(„abtauen“ od.)	„alarm“	-22,5	-14	
Füllmenge/Fill.quantity/Charge	R134a	g	220	
Anschlußwert/Conn.load/Puiss. connectée	W	150	158	
Heizung/Heater/Chauffage		Abtauheizung	Rinnenheizung	
Widerstand/Resistance/Résistance	Ω	173	6050	
Leistung/Power/Puissance	W	333	9,5	
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance	Ω	340		
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance	Ω			
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance	Ω			
Spannung/Voltage/Tension	V			