


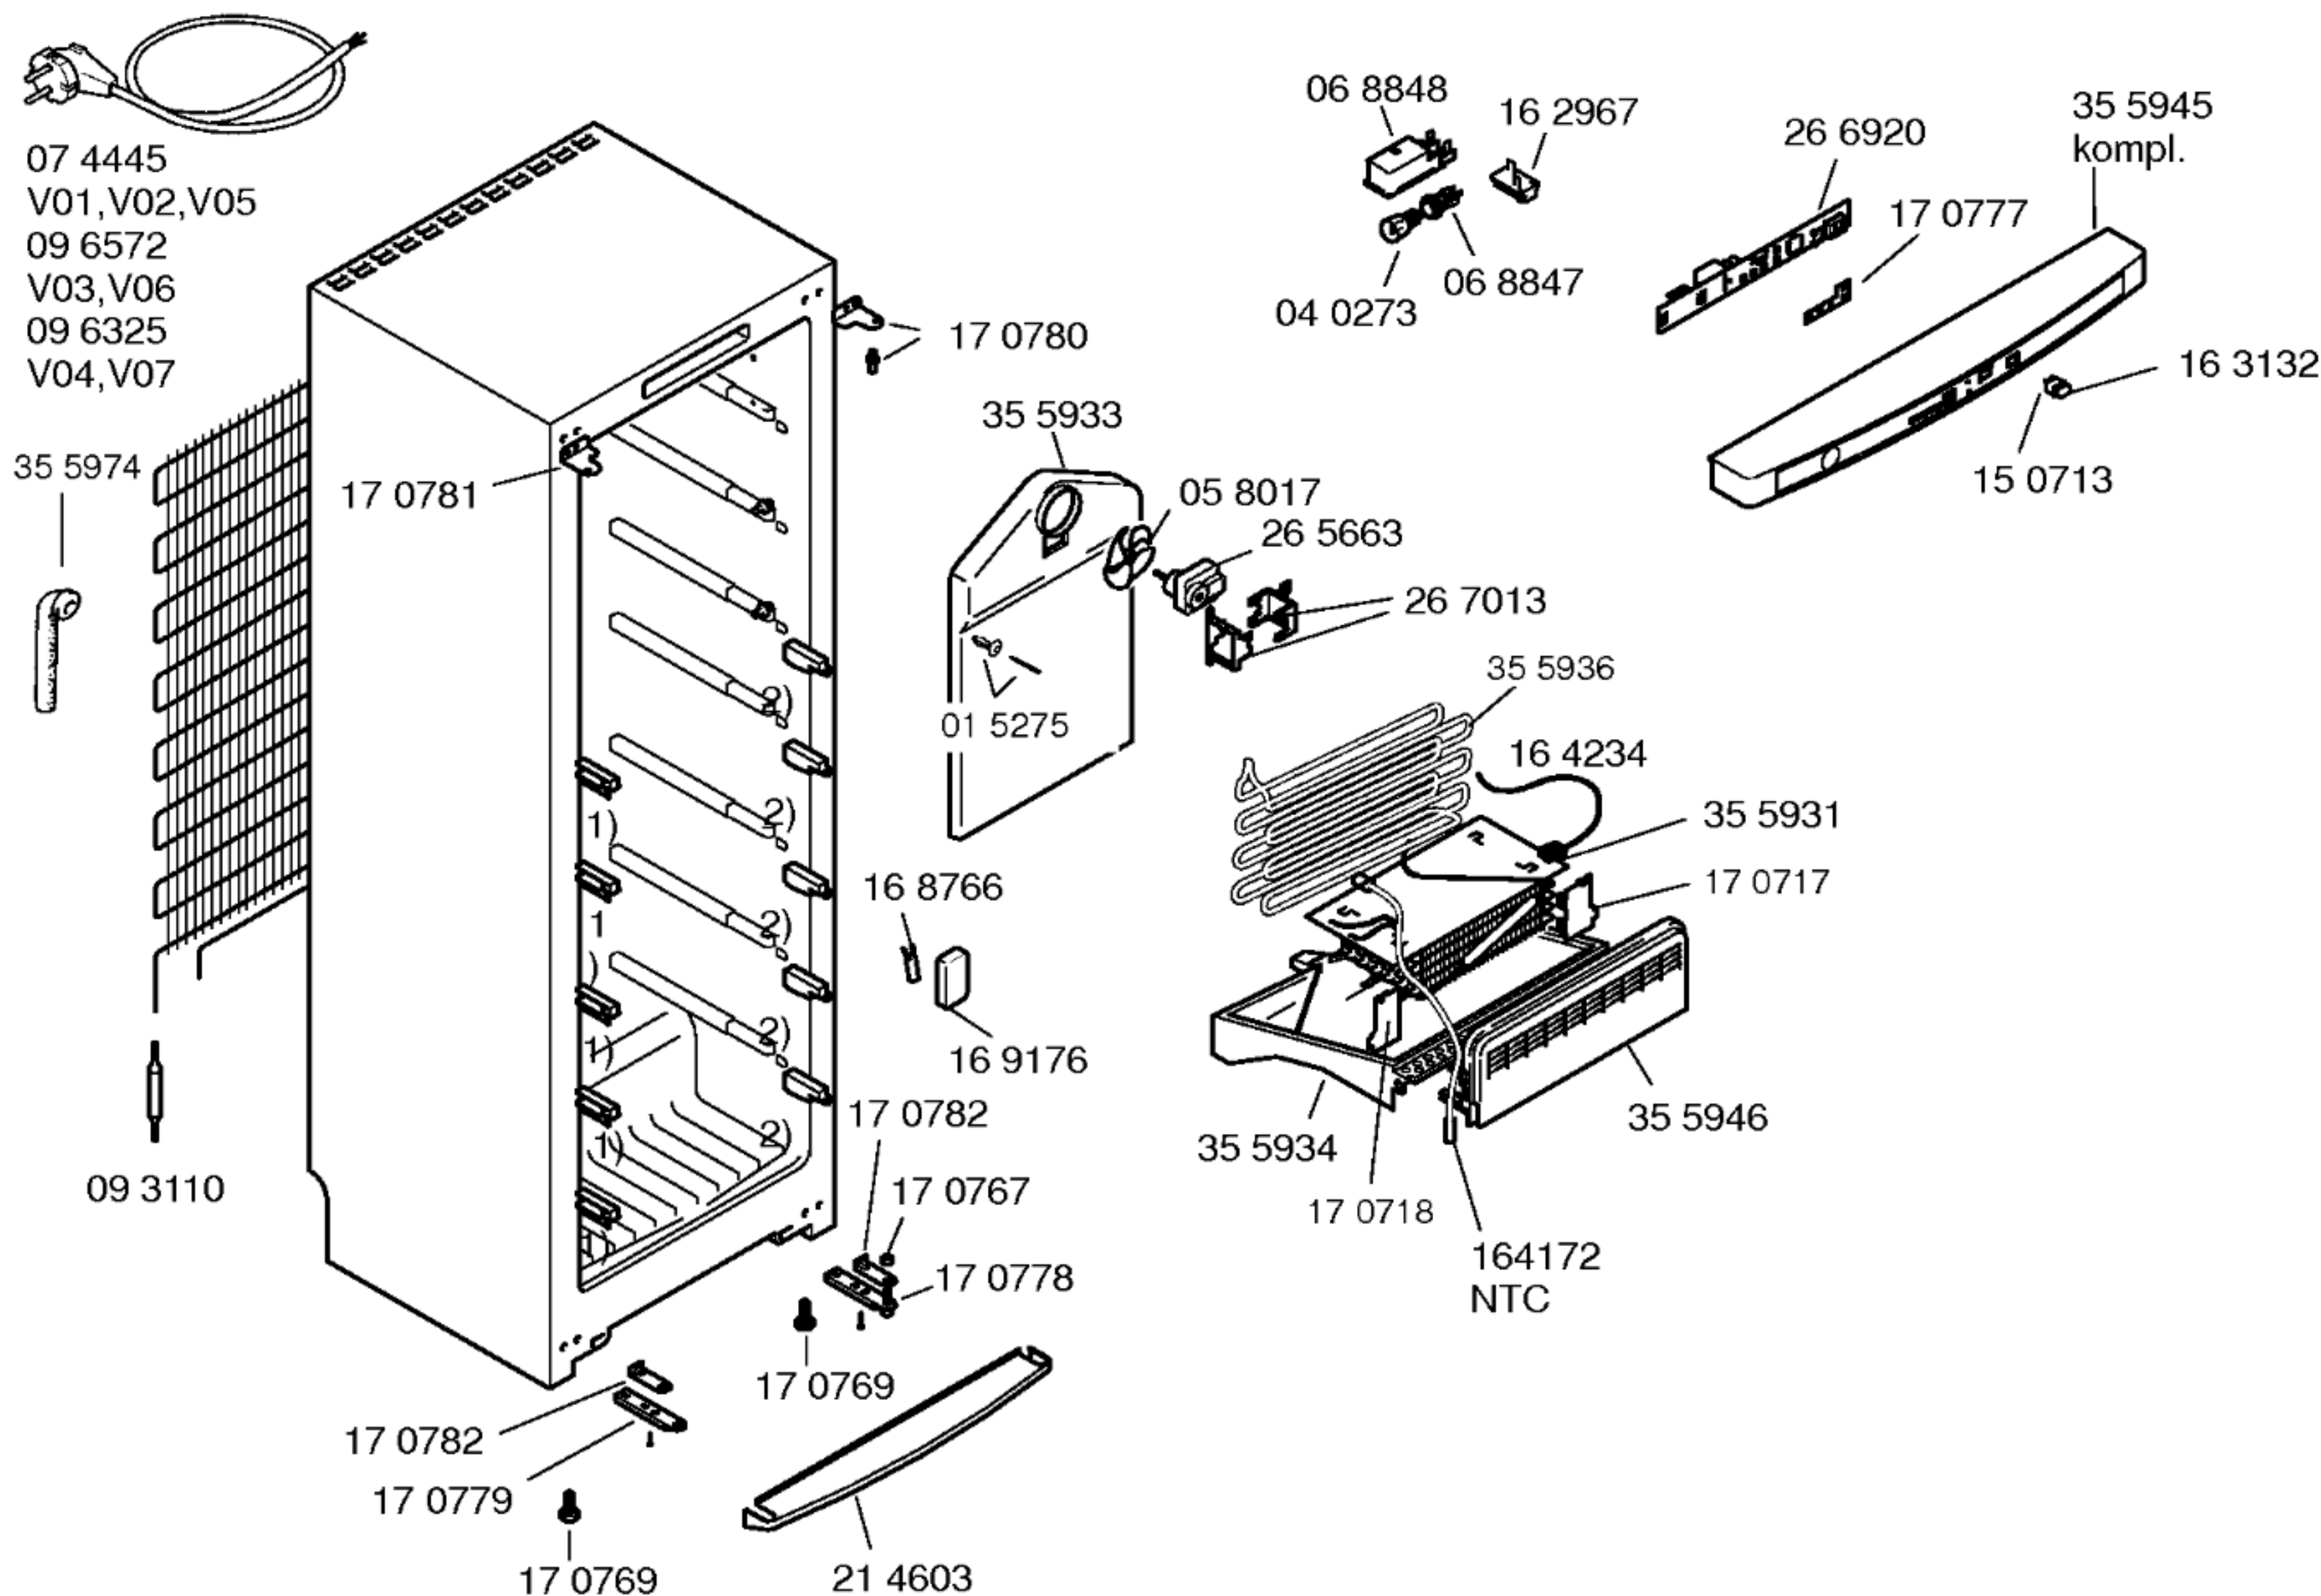




Gebrauchsanweisung
52 3813
(D, GB, F, I, NL, E, P)
Montageanleitung
52 2772
(D, GB, F, I, NL, DK, N
SF, S, E, P, TR, GR)


Beistellsatz
26 5629

Side by Side
Beistellsatz zu KSR/KSK
48 1044

Gefrierraumteiler
35 3678

1) 17 1455
2) 17 1454

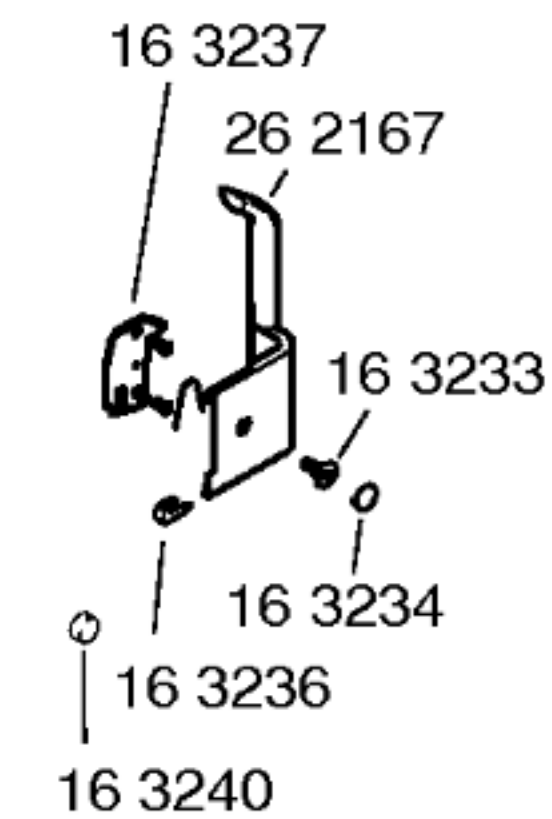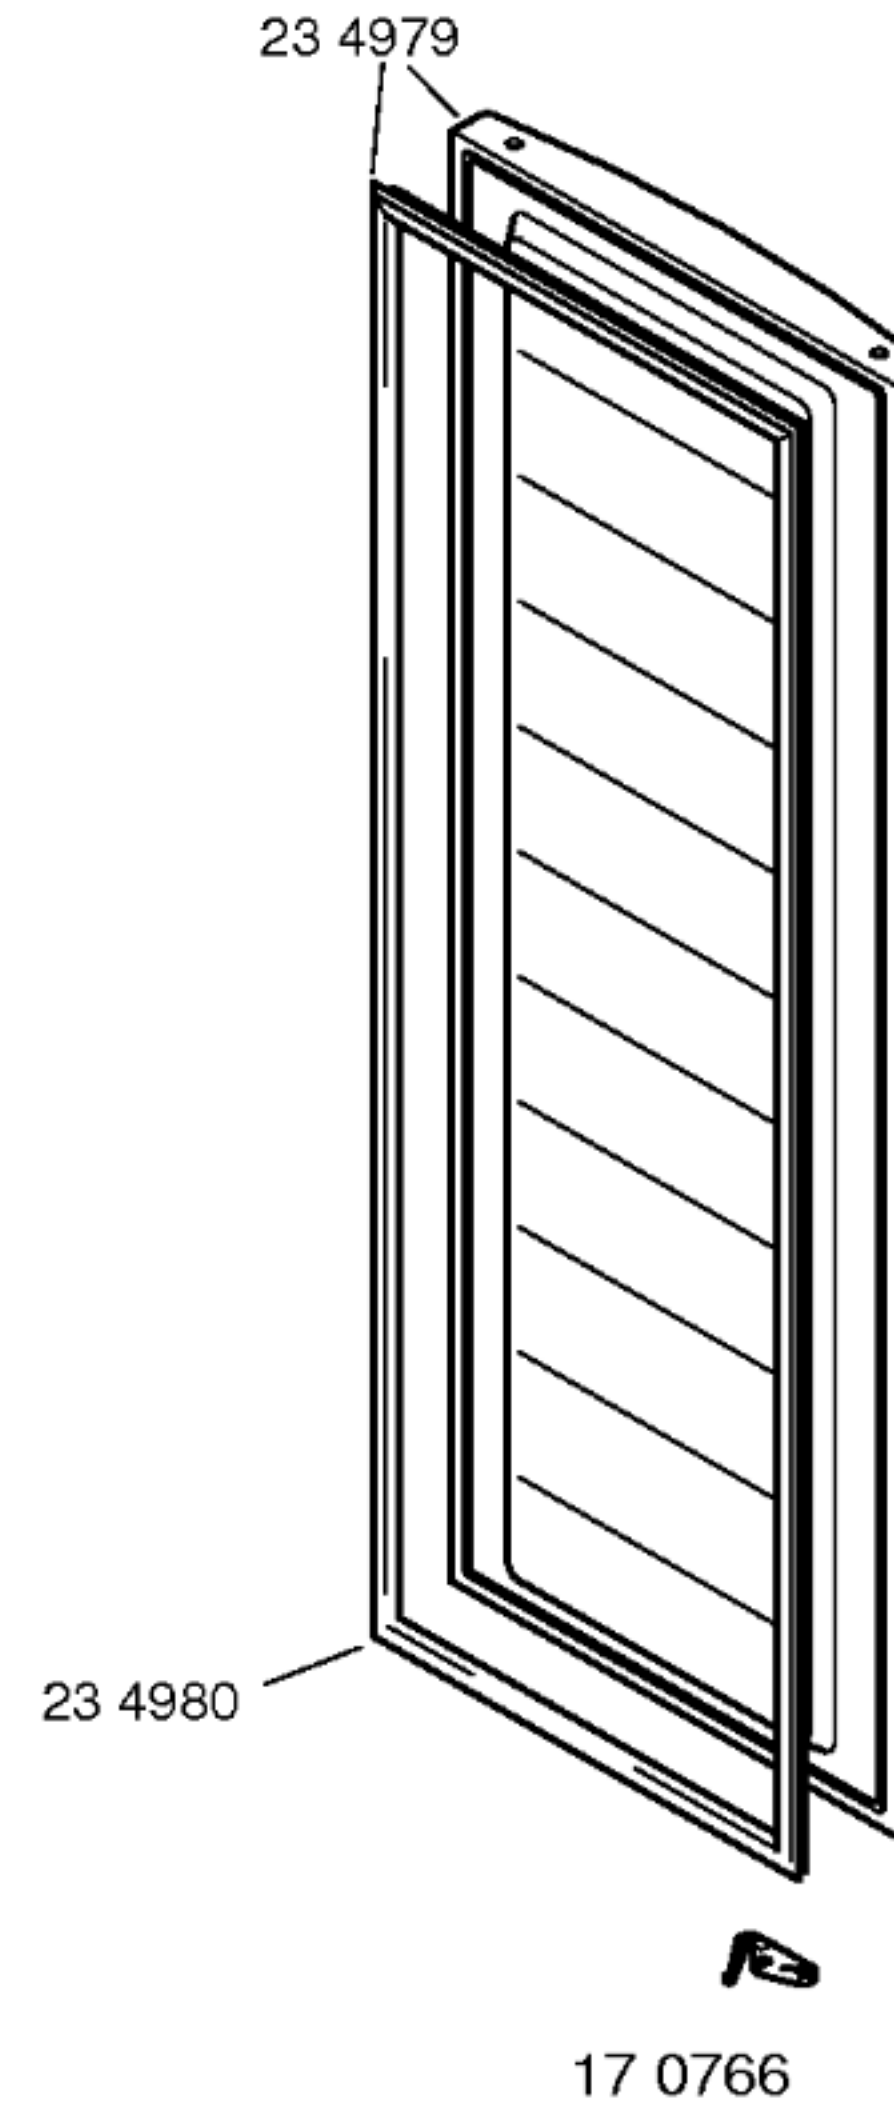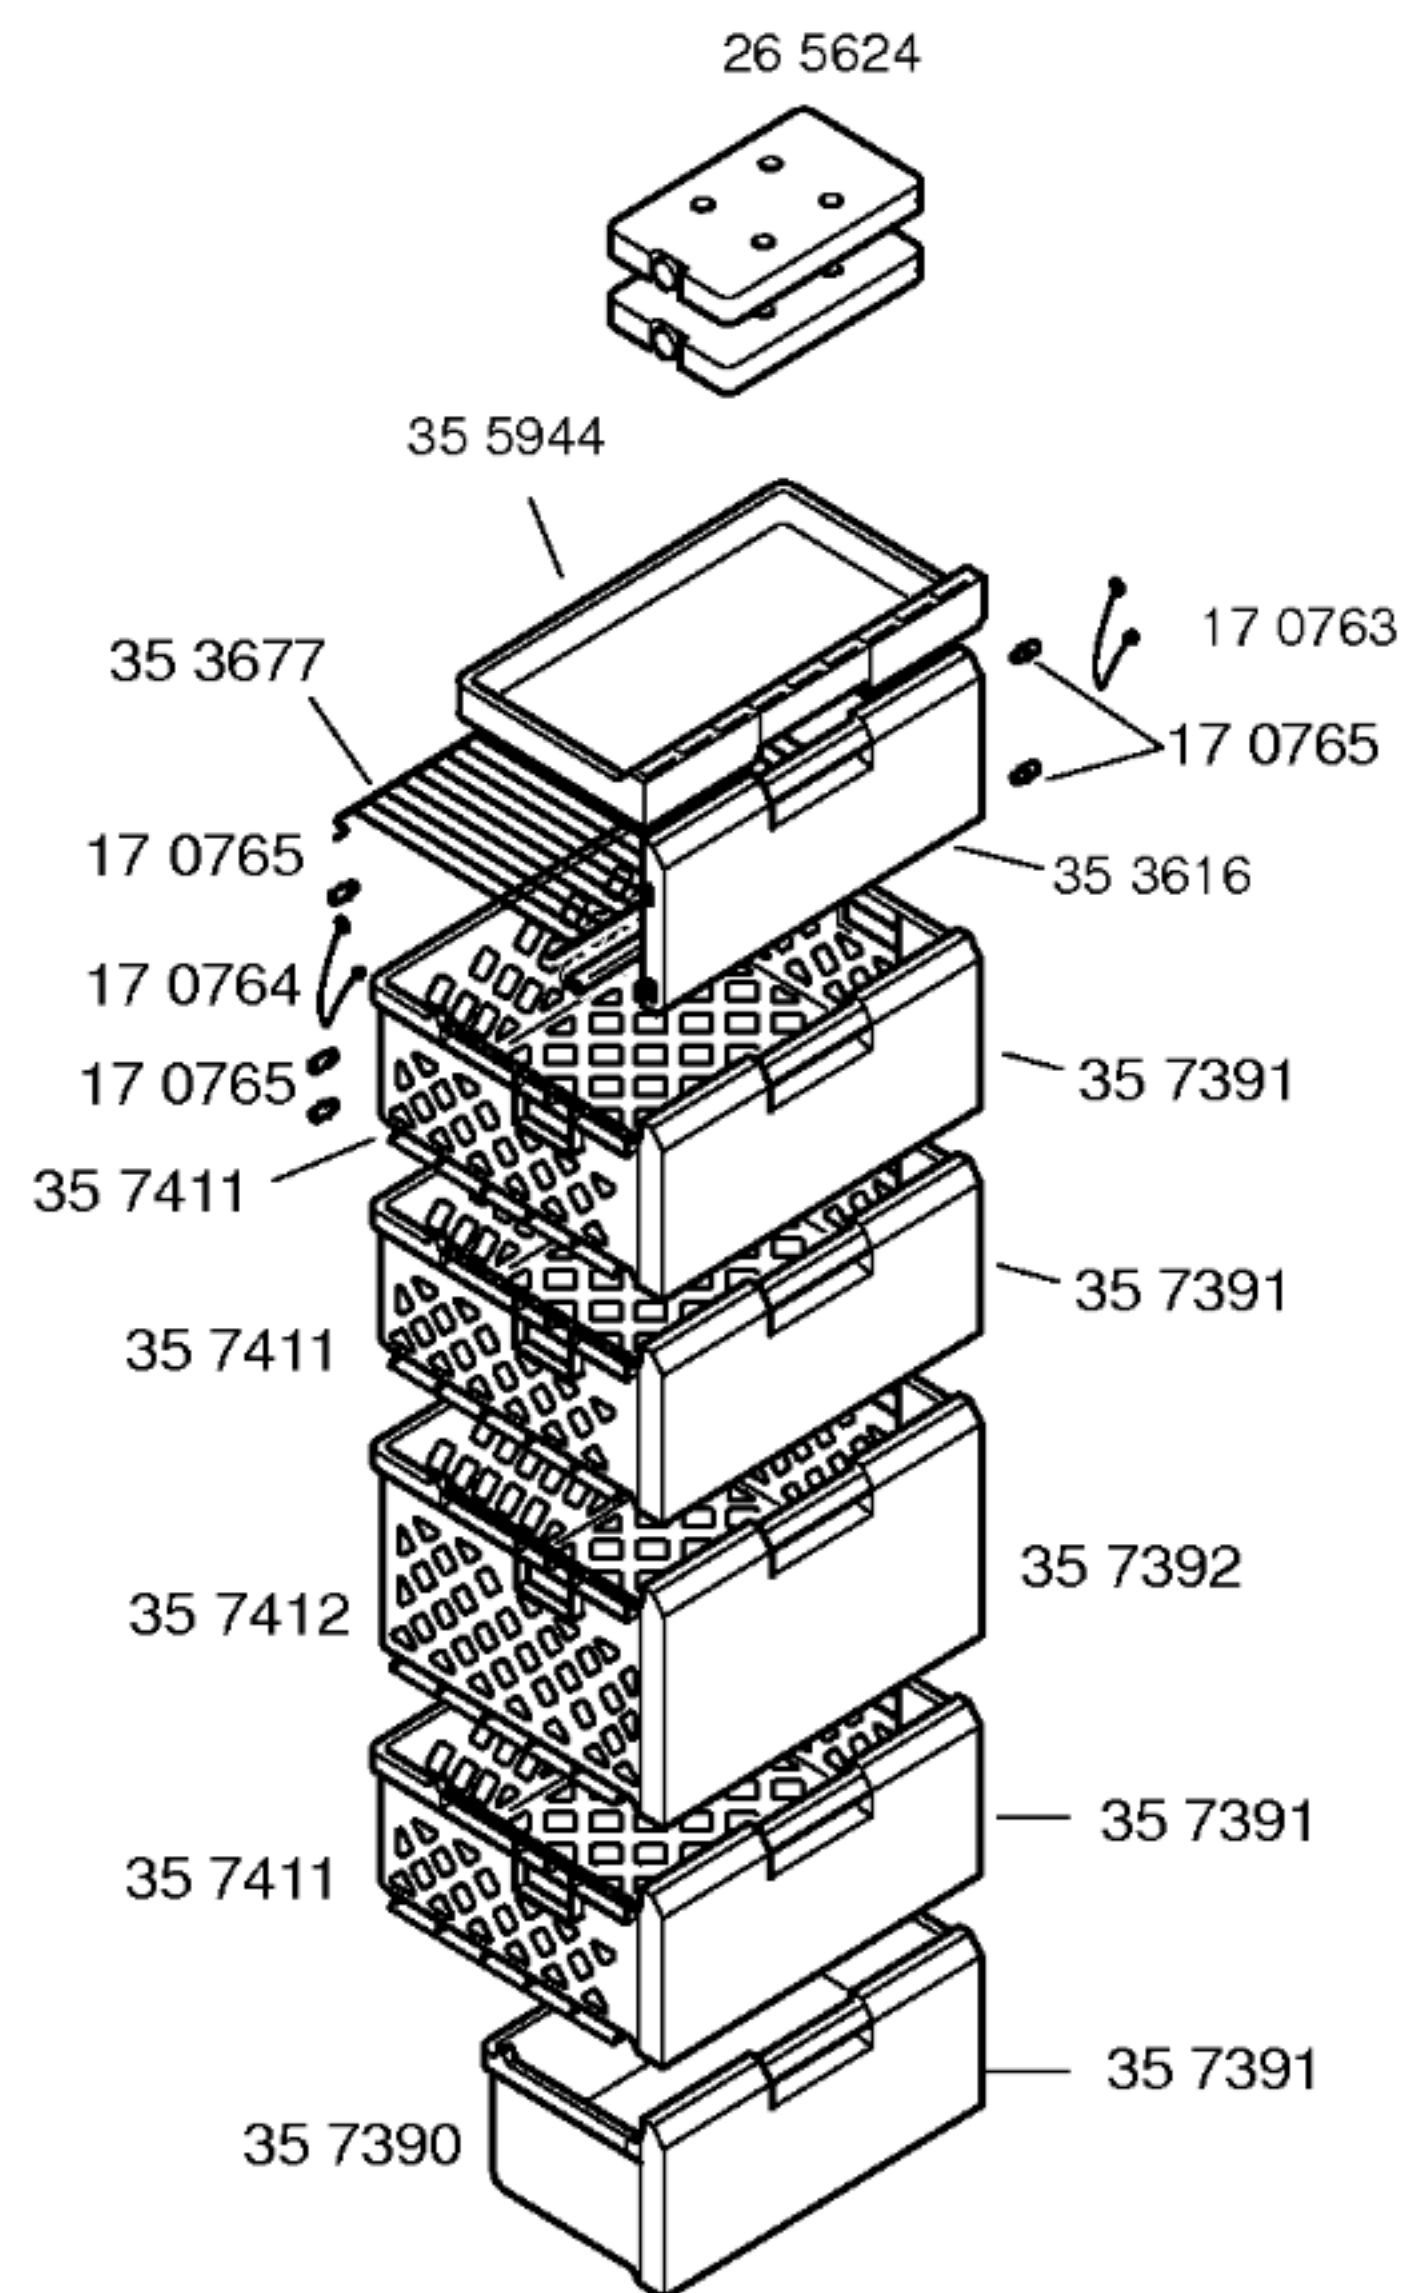

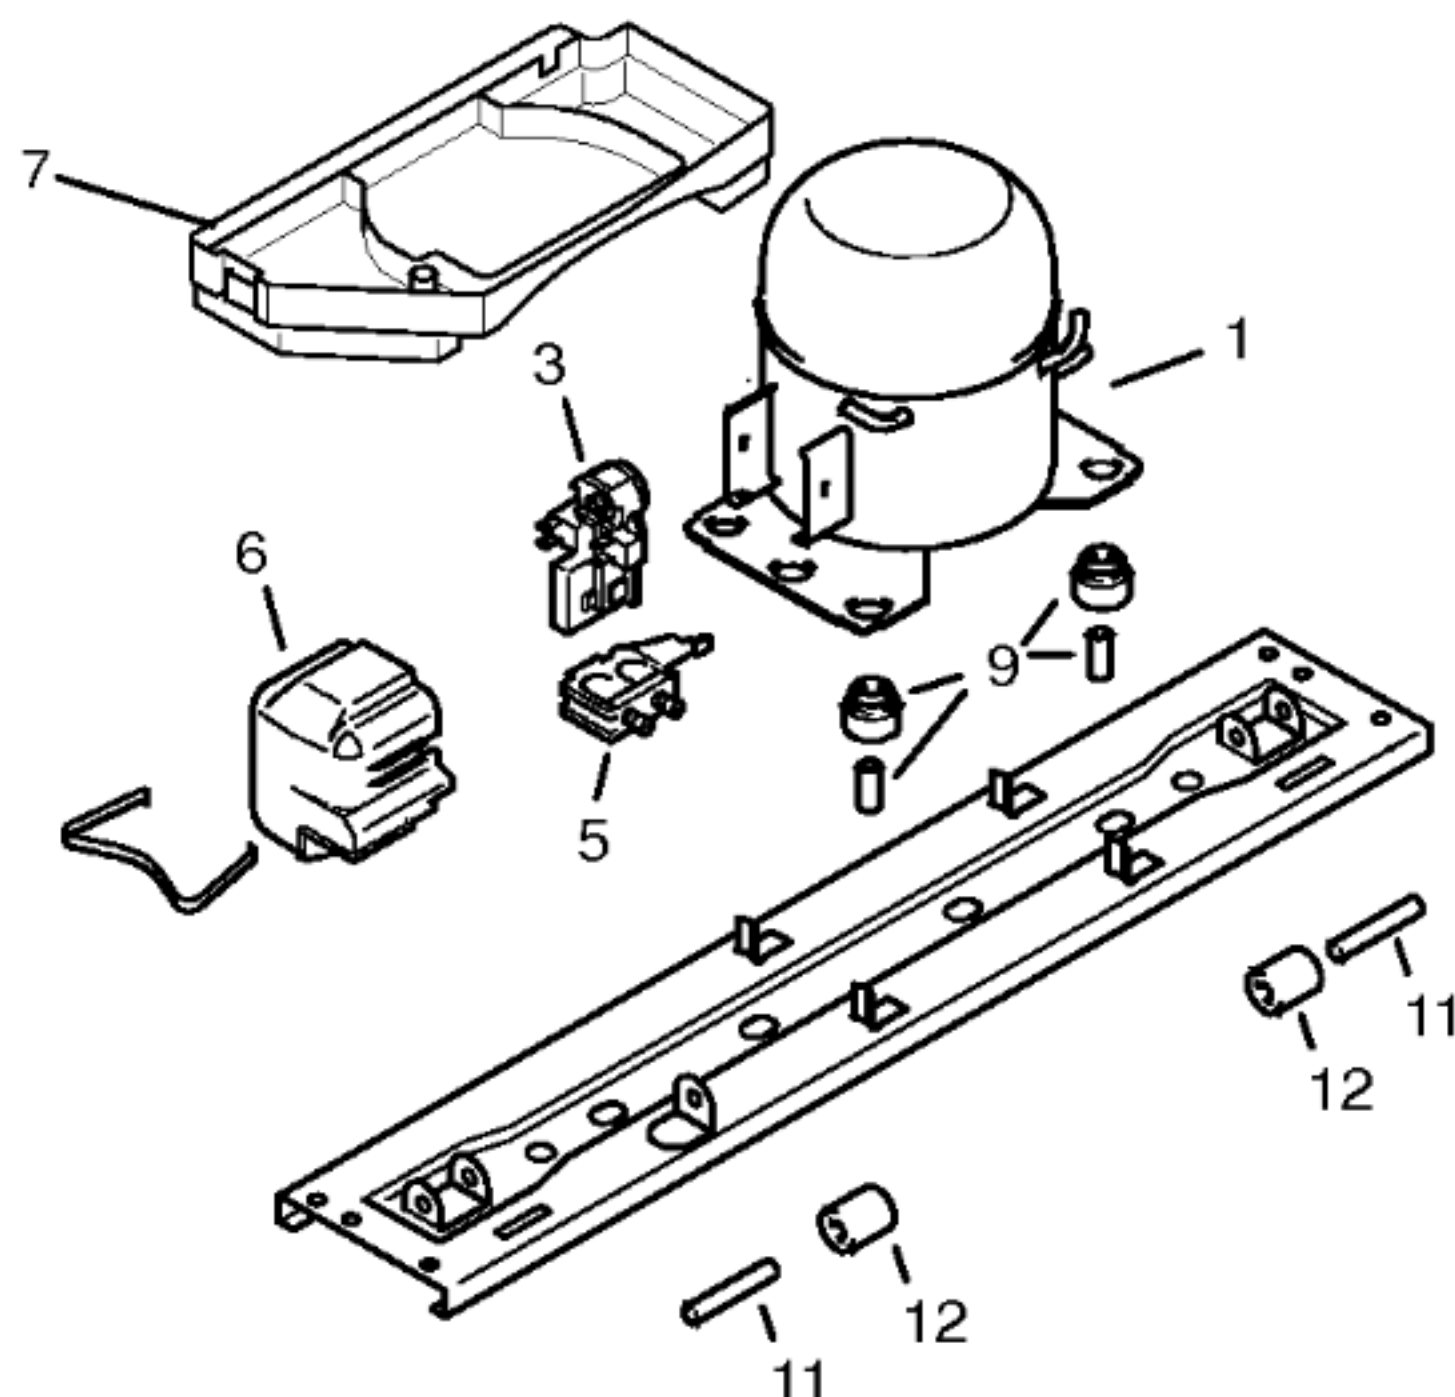

	V01	V02-V04	V05-V07
	Aspera	Matsushita	Danfoss
Pos.	NBT1116Y	DC125E	NLY 13K
1	14 1845	141965	14 1747
2			
3	17 0623	17 2967	15 1055
4			
5	16 8903	16 2549	15 0760
6	16 8902	16 6782	15 1072
7	26 5483	08 8535	09 6212
8			
9	05 0166	05 0166	05 0166
10			
11	01 9017	01 9017	01 9017
12	01 9016	01 9016	01 1916

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES						
Verdichter/Compressor/Compresseur		Aspera		Matsushita		Danfoss
Typ/Type		NBT1116Y		DC125E		NLY 13 K
Förderleistung/Delivery/Débit		l/h	2214	2246		2394
Anlaufstrom/Starting current/Cour de démarrage		A		9,2		11,3
Widerstand/Resistance/Résistance Ha/main/prin		Ω	13,2	12,1		10,5
Hi/aux		Ω	17,6	13,8		11,0
Temp.-Regler/Thermostat			Elektronisch			
Typ/Type			EIN AUS			
Regelstellung/Position			-15 -16			
Schaltwerte/Switching values "warm"			-19 -20			
Valeurs de commutation "kalt"			-23 -24			
			-9 -14			
Füllmenge/Fill.quantity/Charge R600a			*			
Anschlußwert/Conn.load/Puiss. connectée		W	124	120		133
Heizung/Heater/Chauffage			Abtauheizung		Rinnenheizung	
Widerstand/Resistance/Résistance		Ω	288	240		
Leistung/Power/Puissance		W	200	24		
Ventilator/Blower/Ventilateur						
Widerstand/Resistance/Résistance		Ω	560			
Raumtemperaturfühler 2%			C	K	C	k
			+10	9,9	-18	43,3
			+ 5	12,7	-22	54,6
			+ 0	16,3	-26	69,4
Widerstand NTC-Fühler 1%			°C	kΩ	°C	kΩ
			-1	17,3	-15	36,5
			-9	26,2	-16	38,8
			-14	34,5	-19	45,9
			-20	48,6	-23	58,1
			-24	61,6		
Magnetventil/Magnetic valve/Electrovanne						
Widerstand/Resistance/Résistance		Ω				
Spannung/Voltage/Tension		V				

* siehe Typenschild