



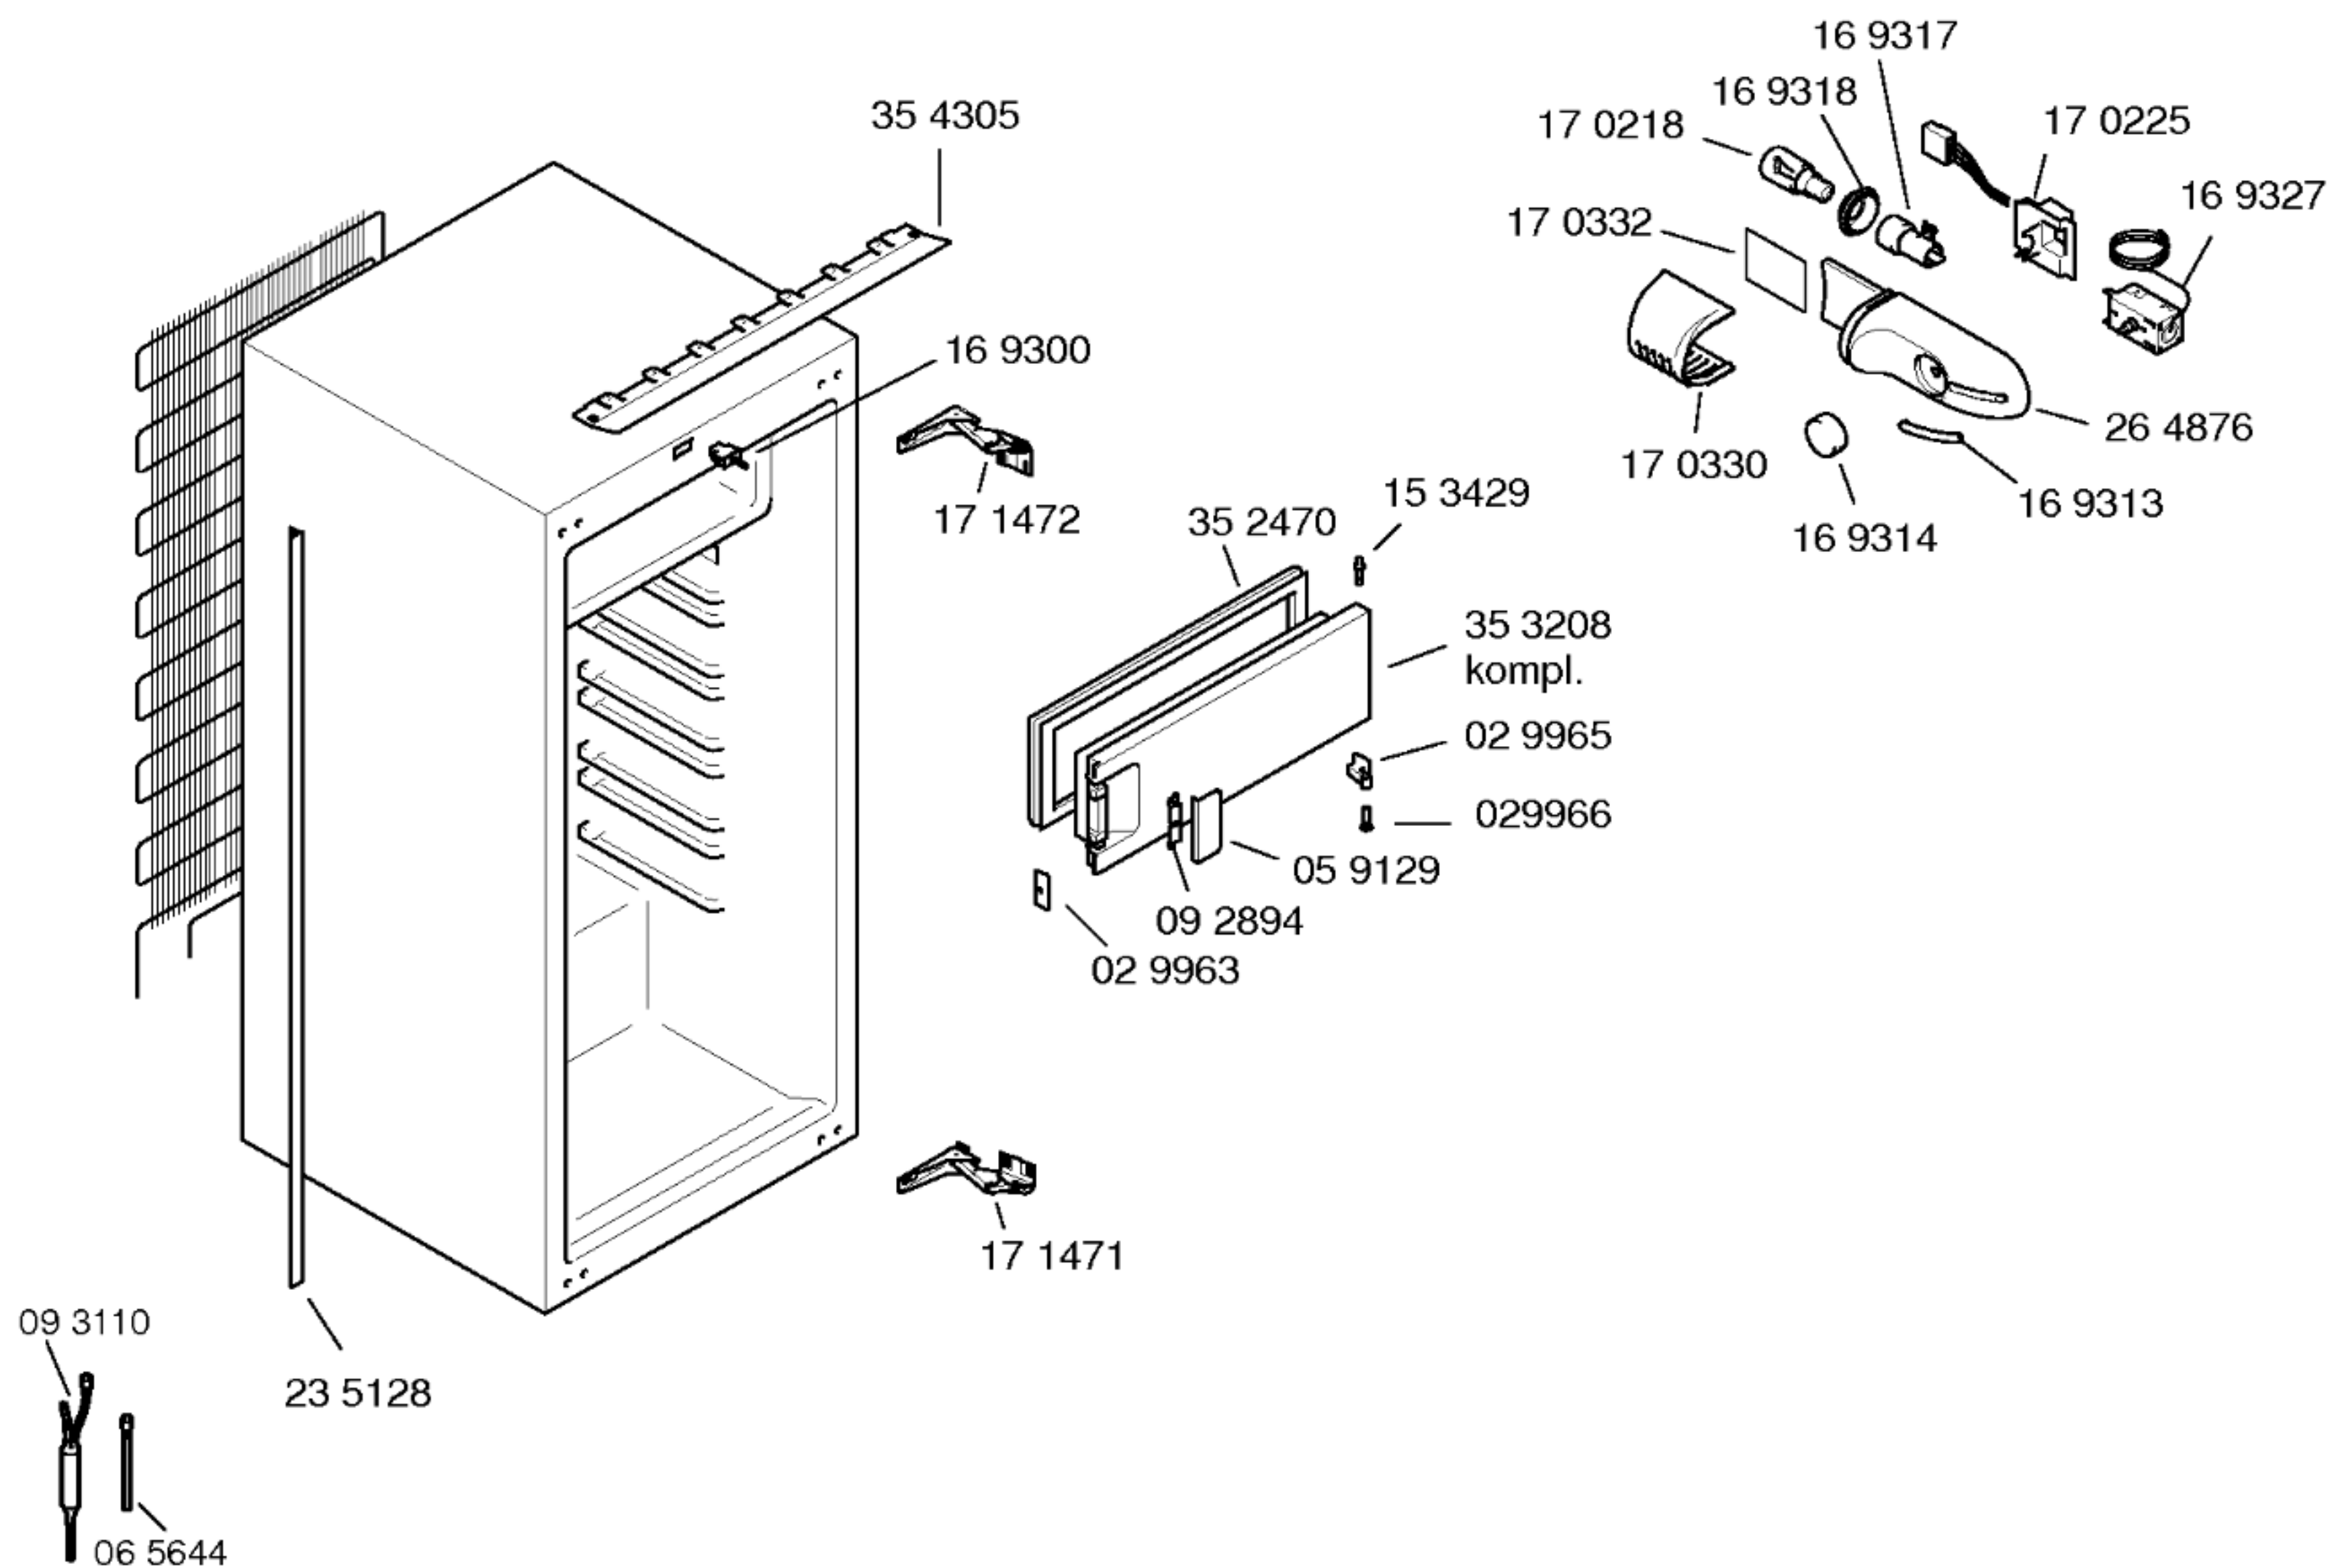

Gebrauchsanweisung  
52 2542  
(D,GB,F,I,NL)

Montageanleitung  
52 3227  
(D,GB,F,I,NL,DK,N,SF,  
SE,TR)

Beistellsatz  
26 6056

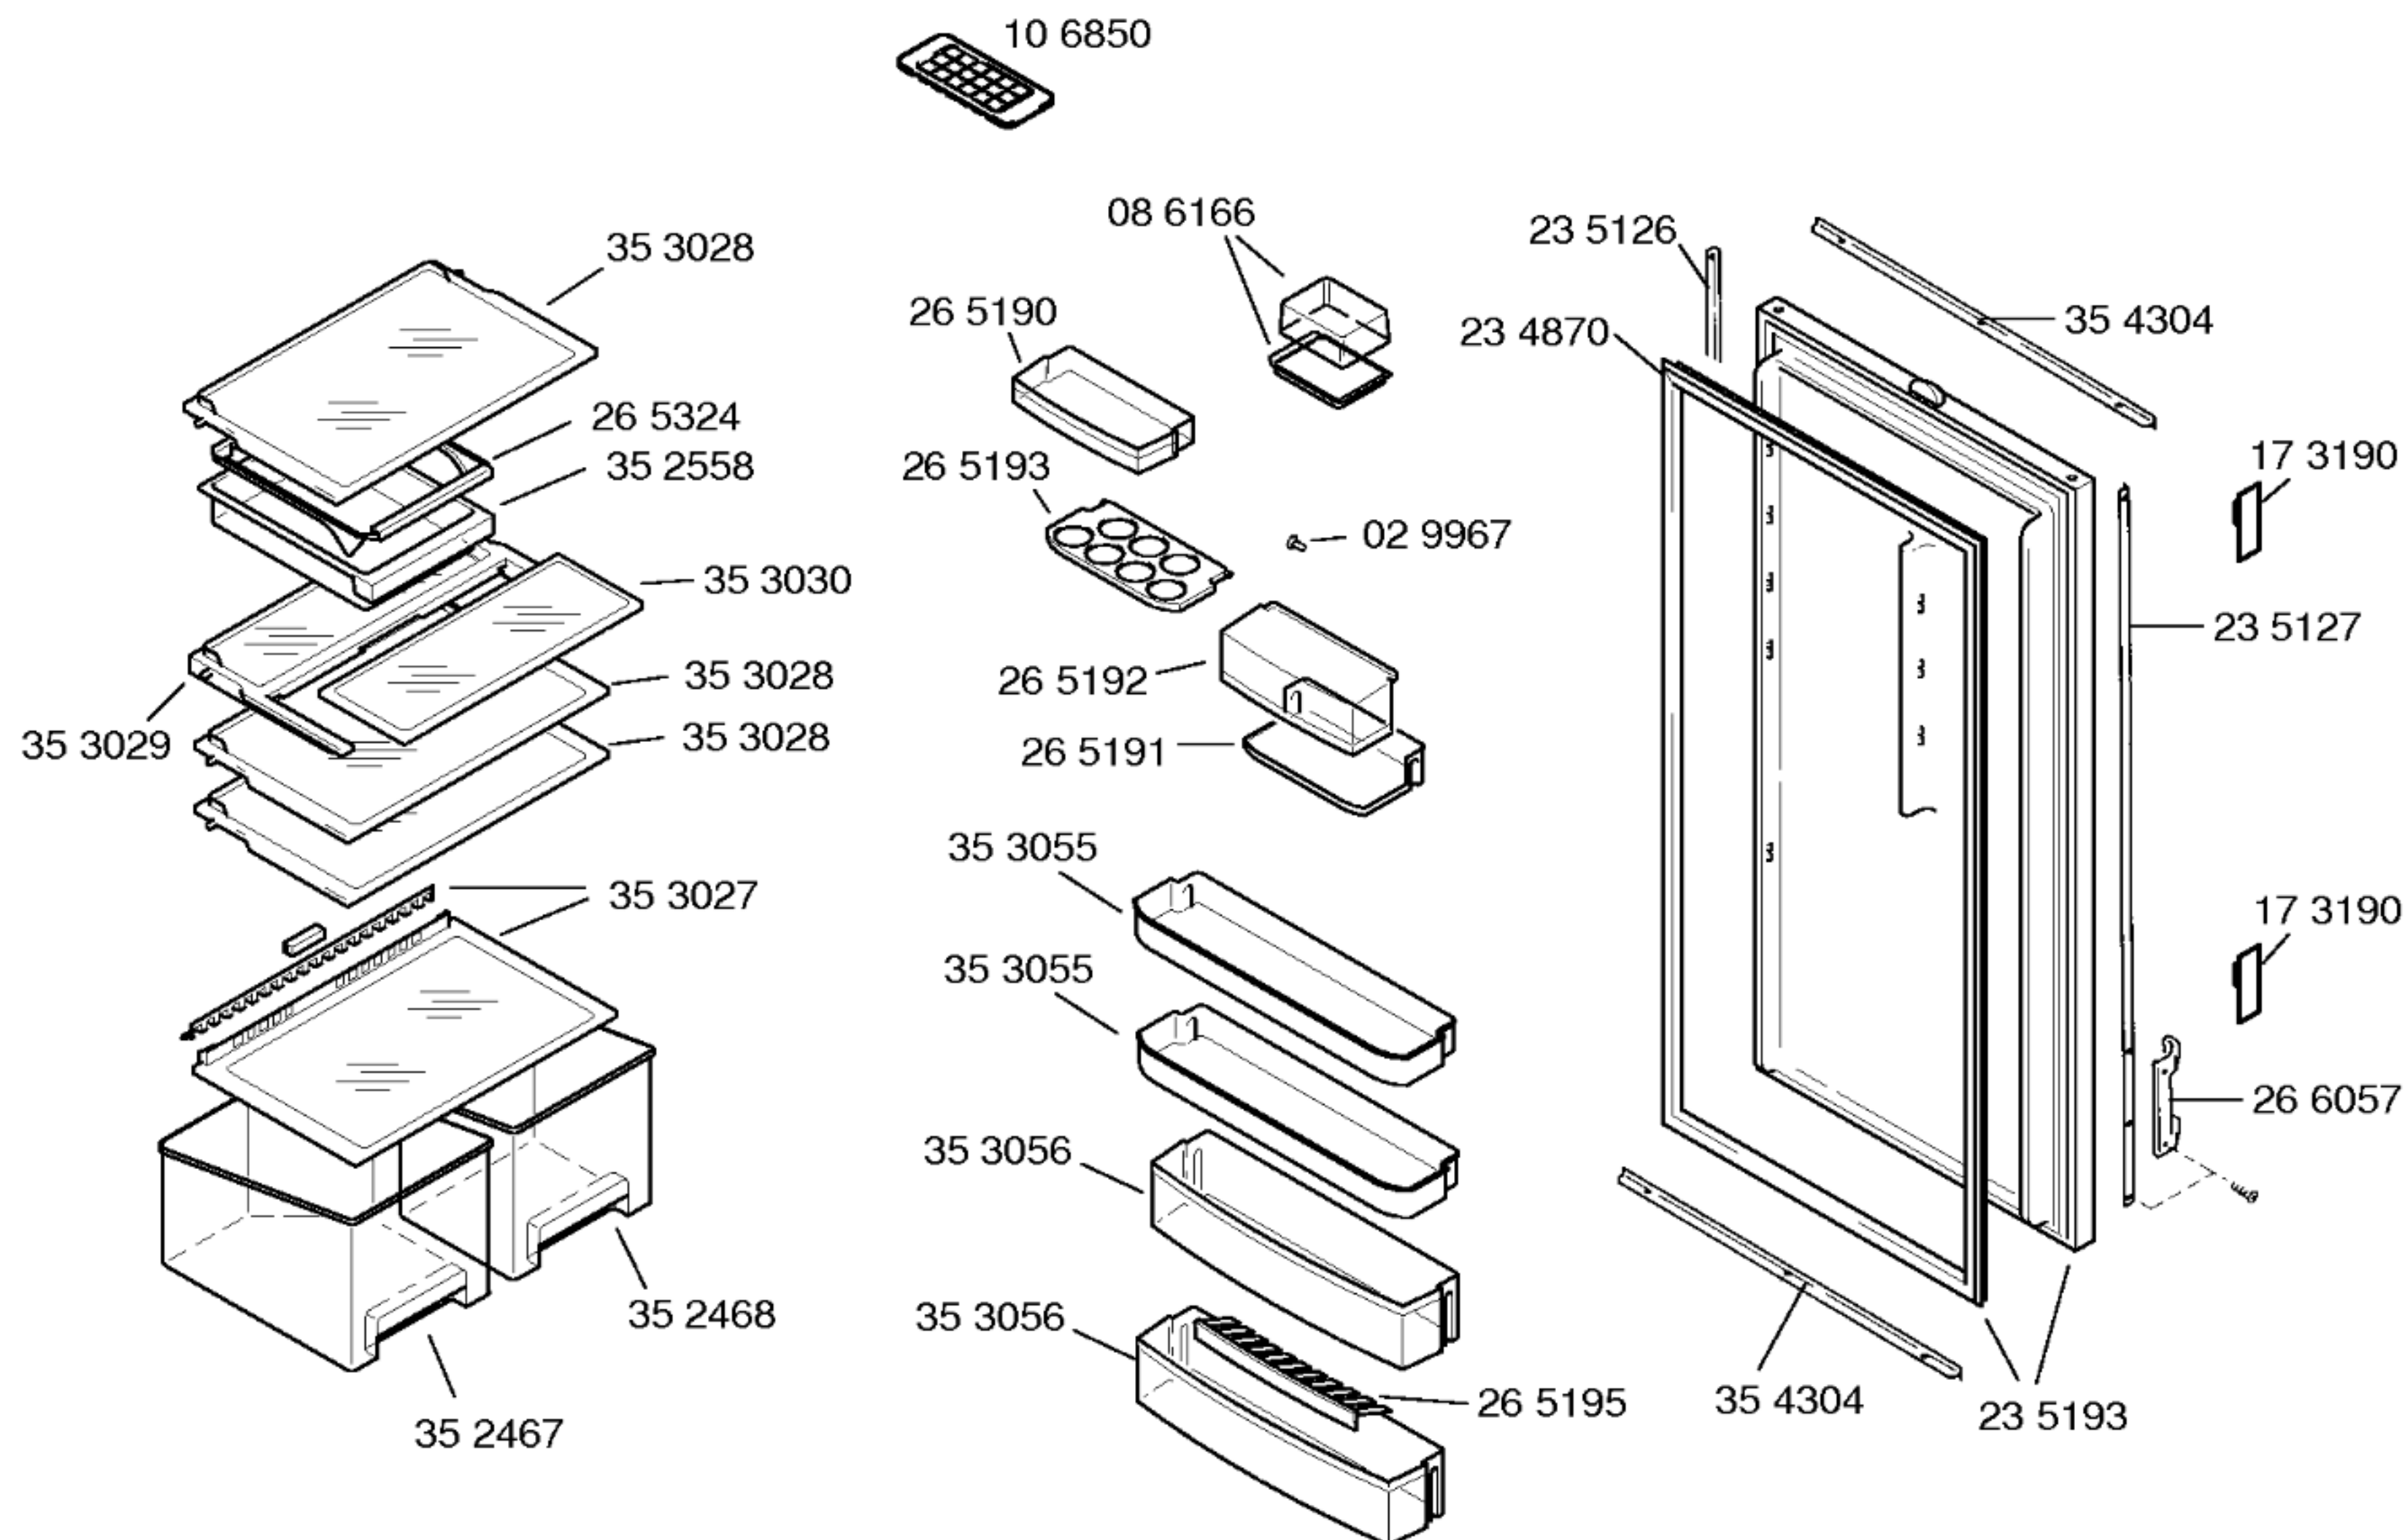

## Ausgleichsblenden

braun

Z4210B1 37mm

Z4220B1 57mm

ALU

Z4210A1 37mm

Z4220A1 57mm

## Dekorrahmen

braun


Z4130B1 880mm

Z4160B1 1225mm

Torx-Schraube 3,5x16

für Dekorrahmen

17 3166

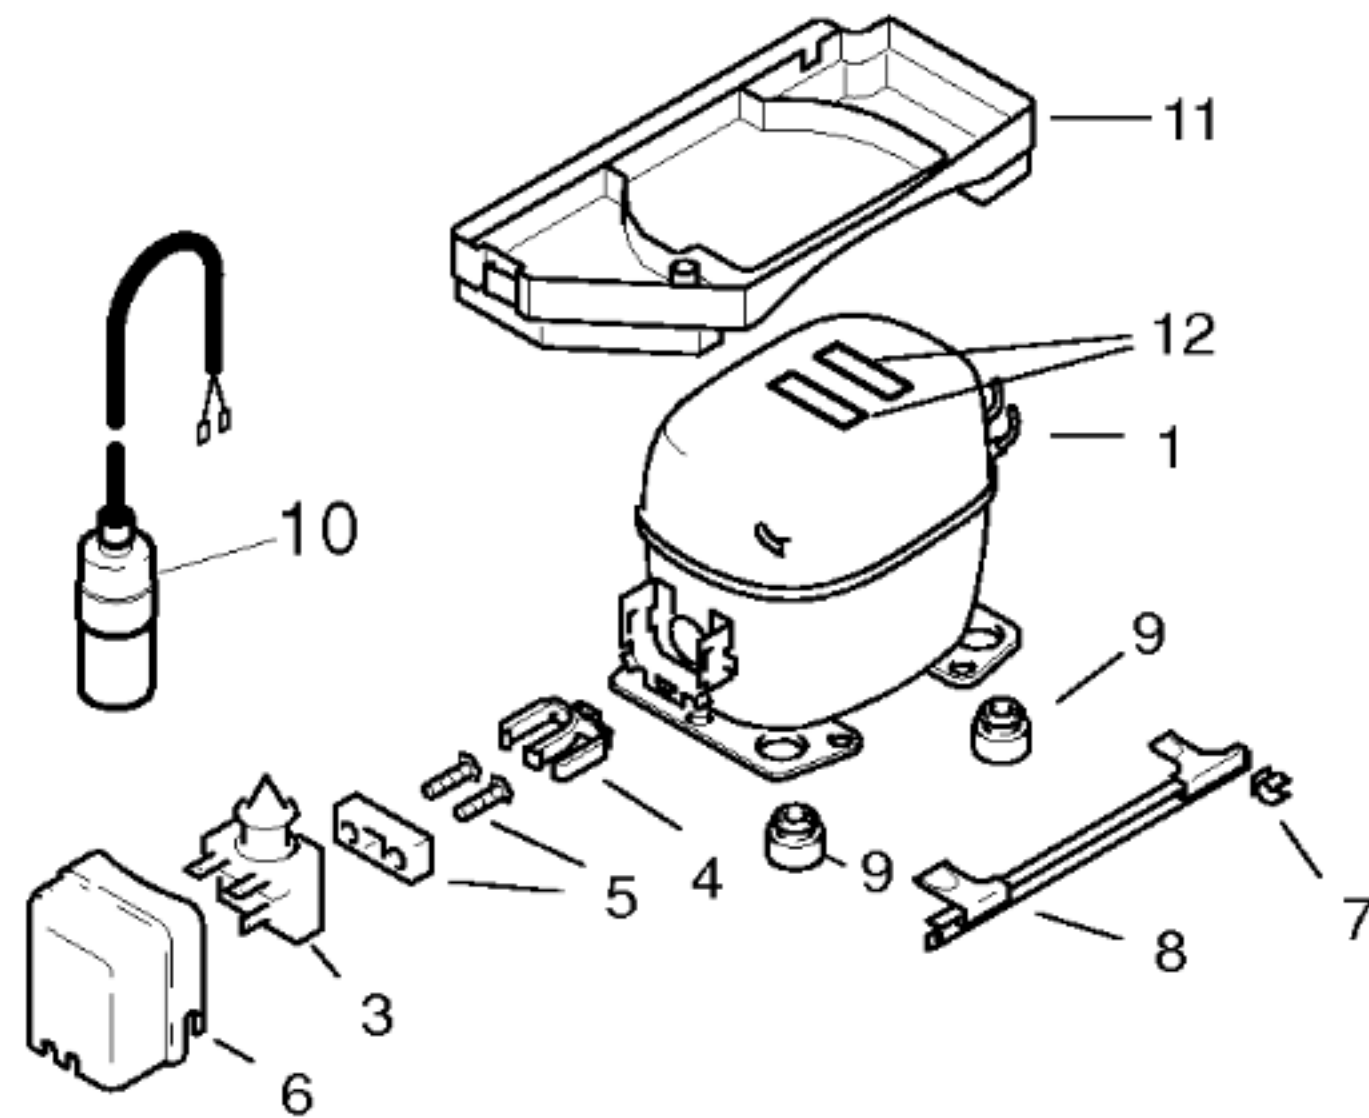

|      |            |  |  |
|------|------------|--|--|
|      | V01        |  |  |
|      | Aspera     |  |  |
| Pos. | EMT 32 CLP |  |  |
| 1    | 14 1838    |  |  |
| 2    |            |  |  |
| 3    | 17 0880    |  |  |
| 4    |            |  |  |
| 5    | 17 0882    |  |  |
| 6    | 17 0881    |  |  |
| 7    |            |  |  |
| 8    | 26 4879    |  |  |
| 9    | 05 0166    |  |  |
| 10   |            |  |  |
| 11   | 26 4878    |  |  |
| 12   | 05 6008    |  |  |

| TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES |  |            |       |       |
|--------------------------------------------------------|--|------------|-------|-------|
| Verdichter/Compressor/Compresseur                      |  | Aspera     |       |       |
| Typ/Type                                               |  | EMT 32 CLP |       |       |
| Förderleistung/Delivery/Débit                          |  | l/h        | 1073  |       |
| Anlaufstrom/Starting current/Cour de démarrage         |  | A          | 3,5   |       |
| Widerstand/Resistance/Résistance Ha/main/prin          |  | W          | 28,4  |       |
| Hi/aux                                                 |  | W          | 24,7  |       |
| Temp.-Regler/Thermostat                                |  | KER        |       |       |
| Typ/Type                                               |  | RCO        |       |       |
| Regelstellung/Position                                 |  | kalt       | warm  |       |
| Schaltwerte/Switching values                           |  | ein"       | +5,2  |       |
| Valeurs de commutation                                 |  | aus"       | +5,2  |       |
|                                                        |  | "alarm"    | -32,0 | -15,0 |
| Füllmenge/Fill.quantity/Charge                         |  | R600a      | *     |       |
| Anschlußwert/Conn.load/Puiss. connectée                |  | W          | 90    |       |
| Heizung/Heater/Chauffage                               |  |            |       |       |
| Widerstand/Resistance/Résistance                       |  | W          |       |       |
| Leistung/Power/Puissance                               |  | W          |       |       |
| Ventilator/Blower/Ventilateur                          |  |            |       |       |
| Widerstand/Resistance/Résistance                       |  | W          |       |       |
| Temp.-Regler/Thermostat                                |  |            |       |       |
| Magnetventil/Magnetic valve/Electrovanne               |  |            |       |       |
| Widerstand/Resistance/Résistance                       |  | W          |       |       |
| Spannung/Voltage/Tension                               |  | V          |       |       |

\* siehe Typenschild