


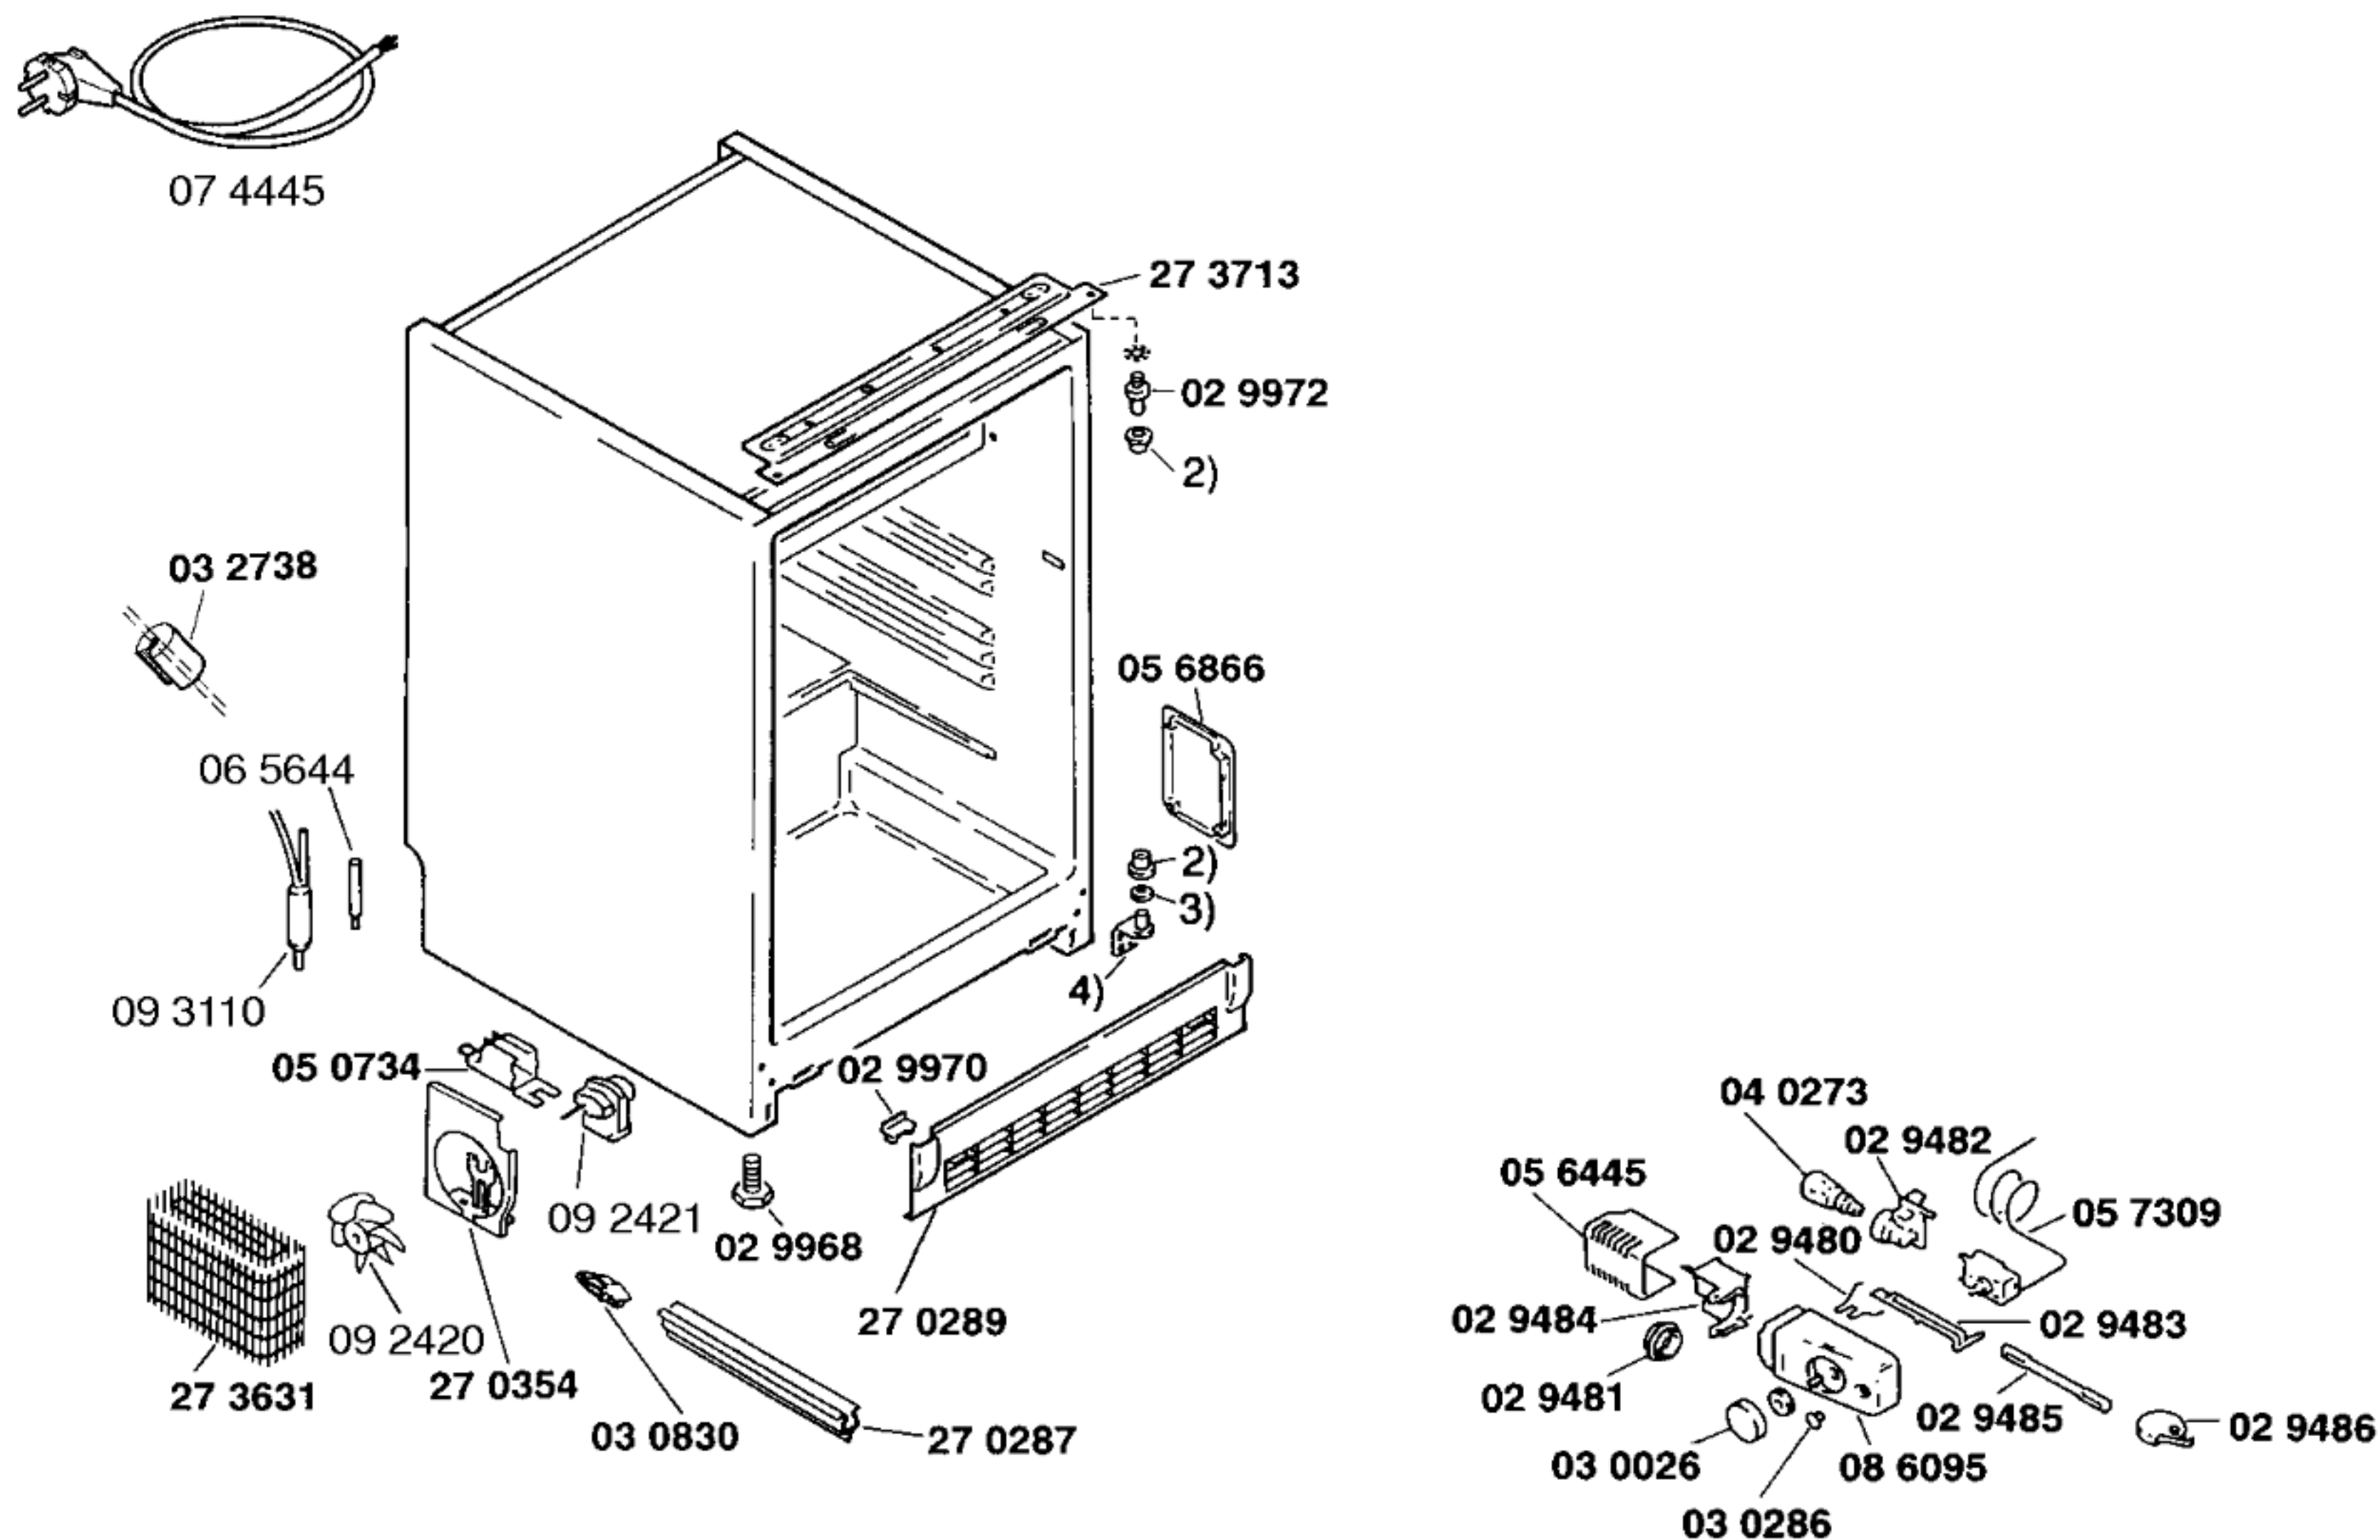


51 4330
Gebrauchsanweisung
(D,GB,F,I,NL,S,SF,
E,P,DK,N)
51 4009
Montageanweisung
(D,GB,F,I,NL,S,SF,
E,P,DK,N)


2) 01 9257
3) 02 0605
4) 02 9971

Zubehör:

Dekorrahmen
Z4110A1,Alu
Z4110W1,weiss

Sockel
Z4510X0

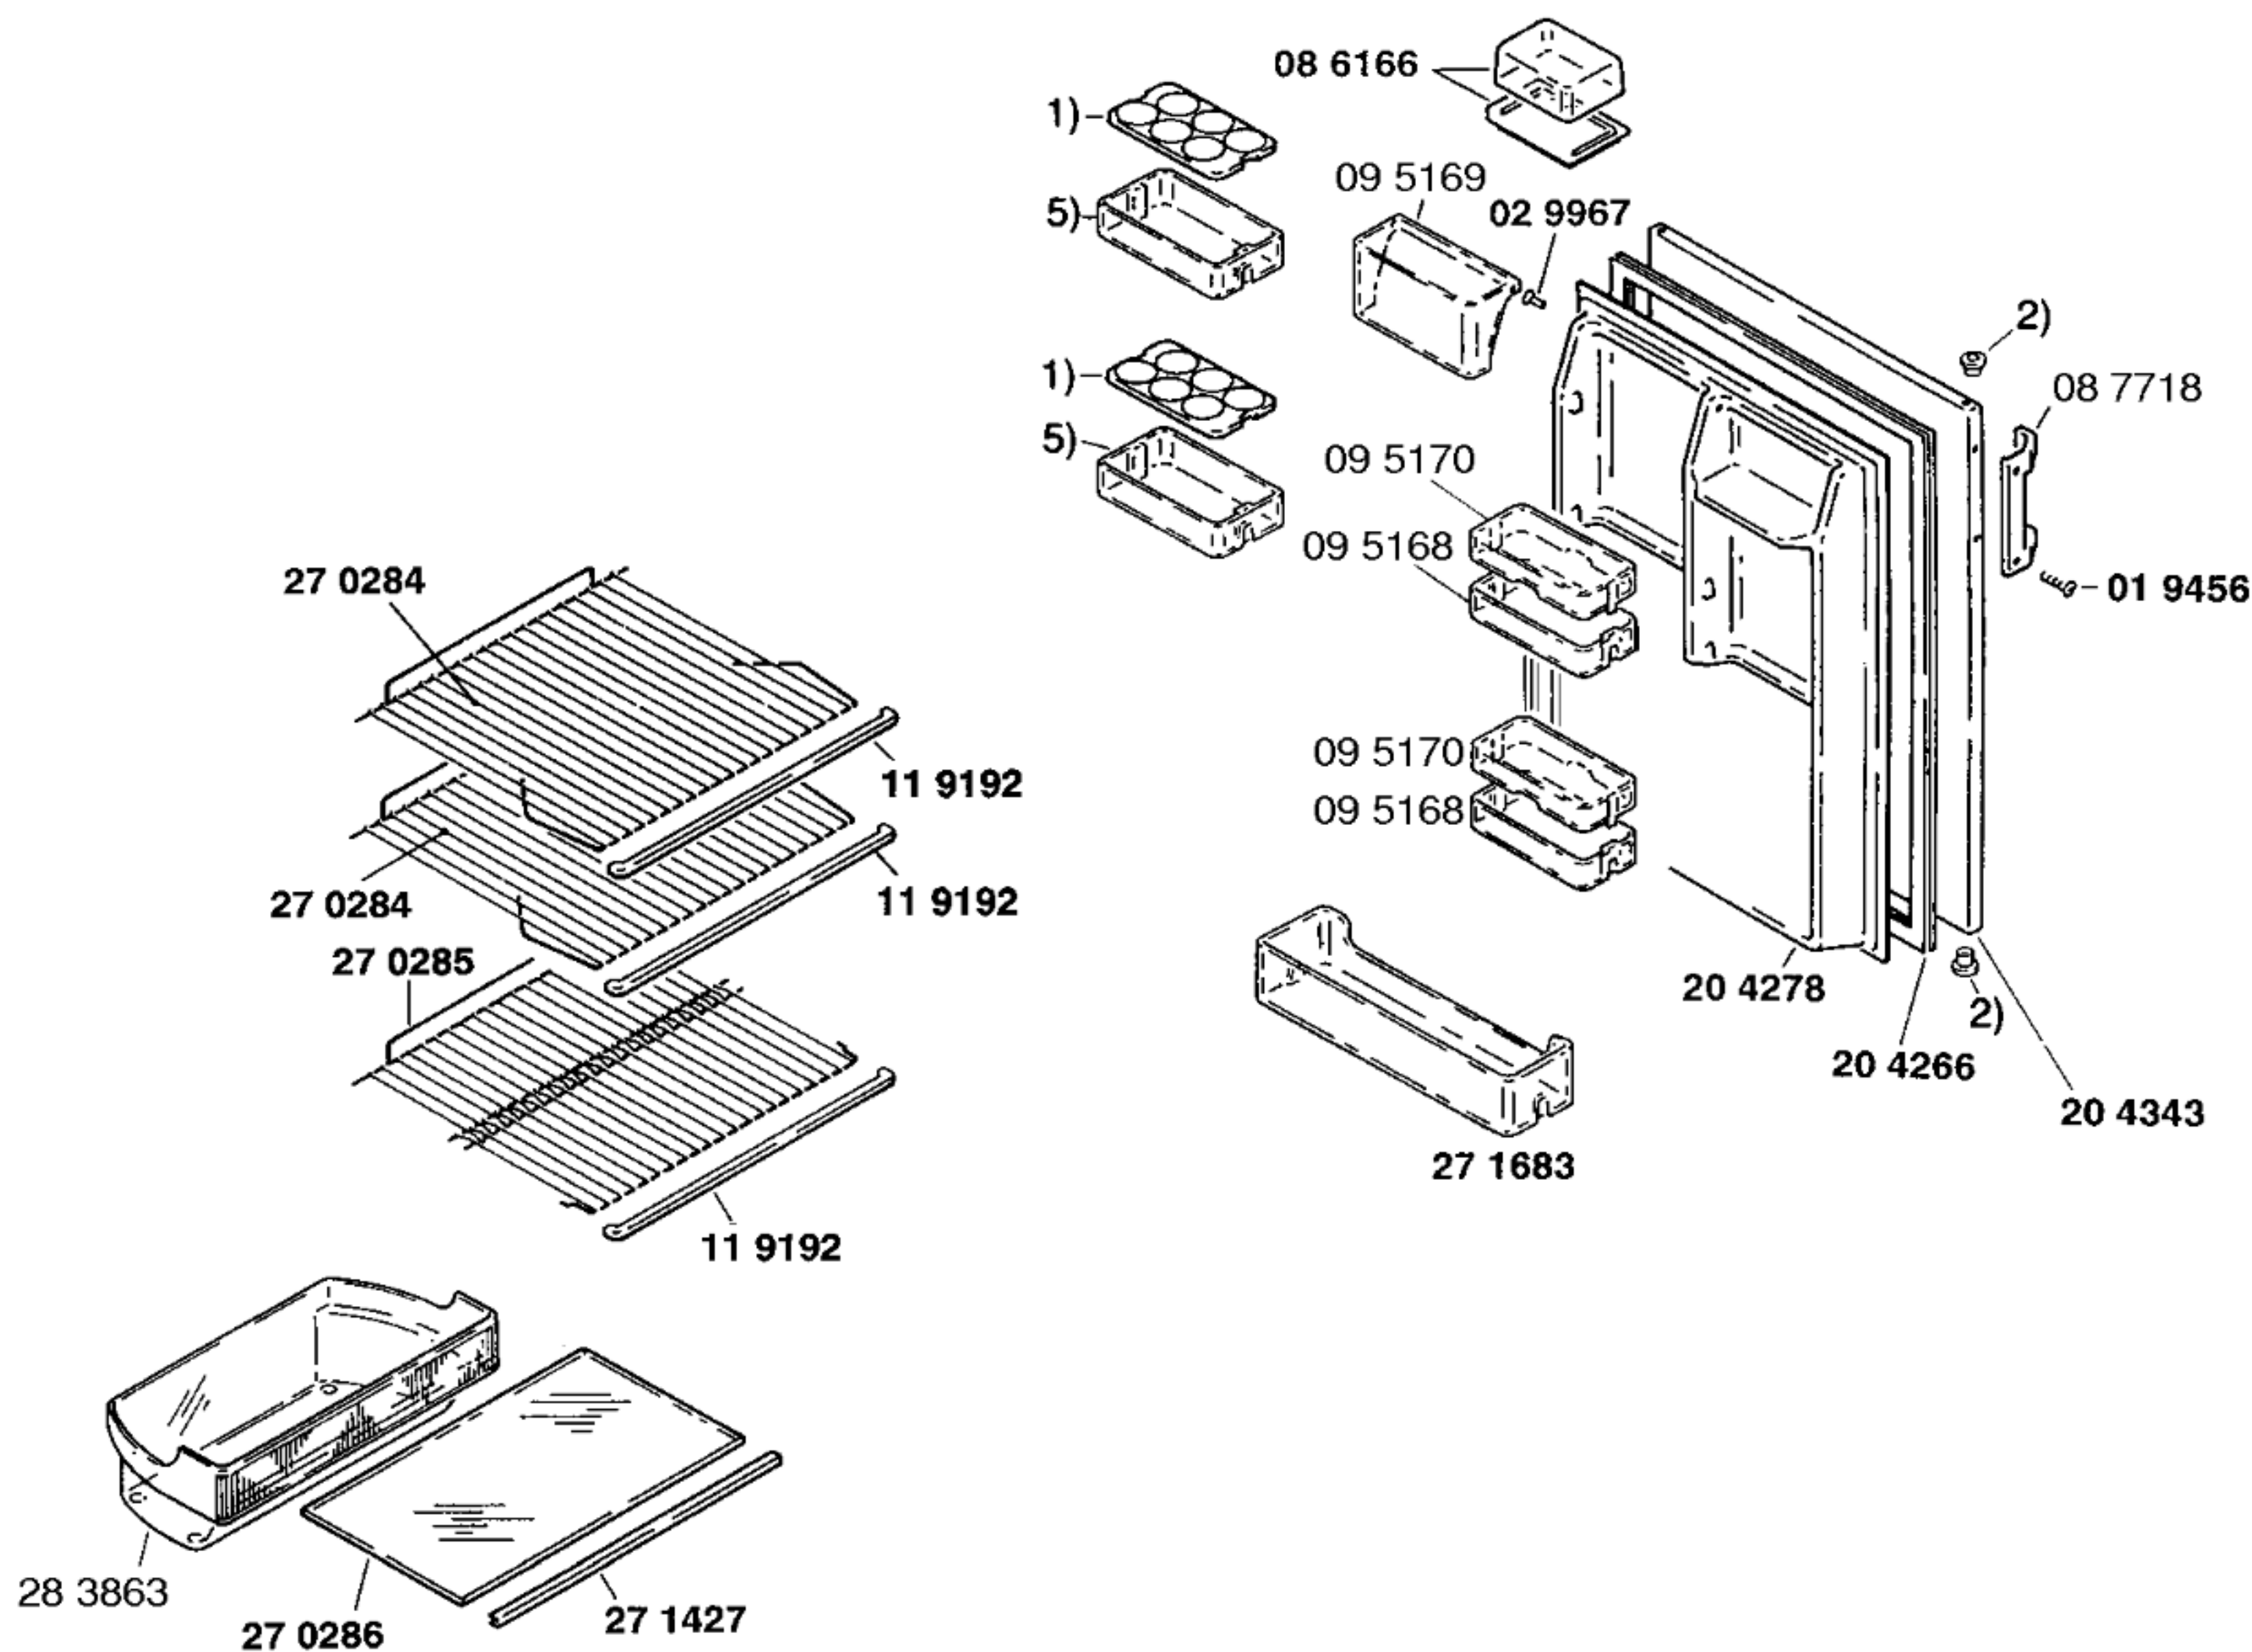

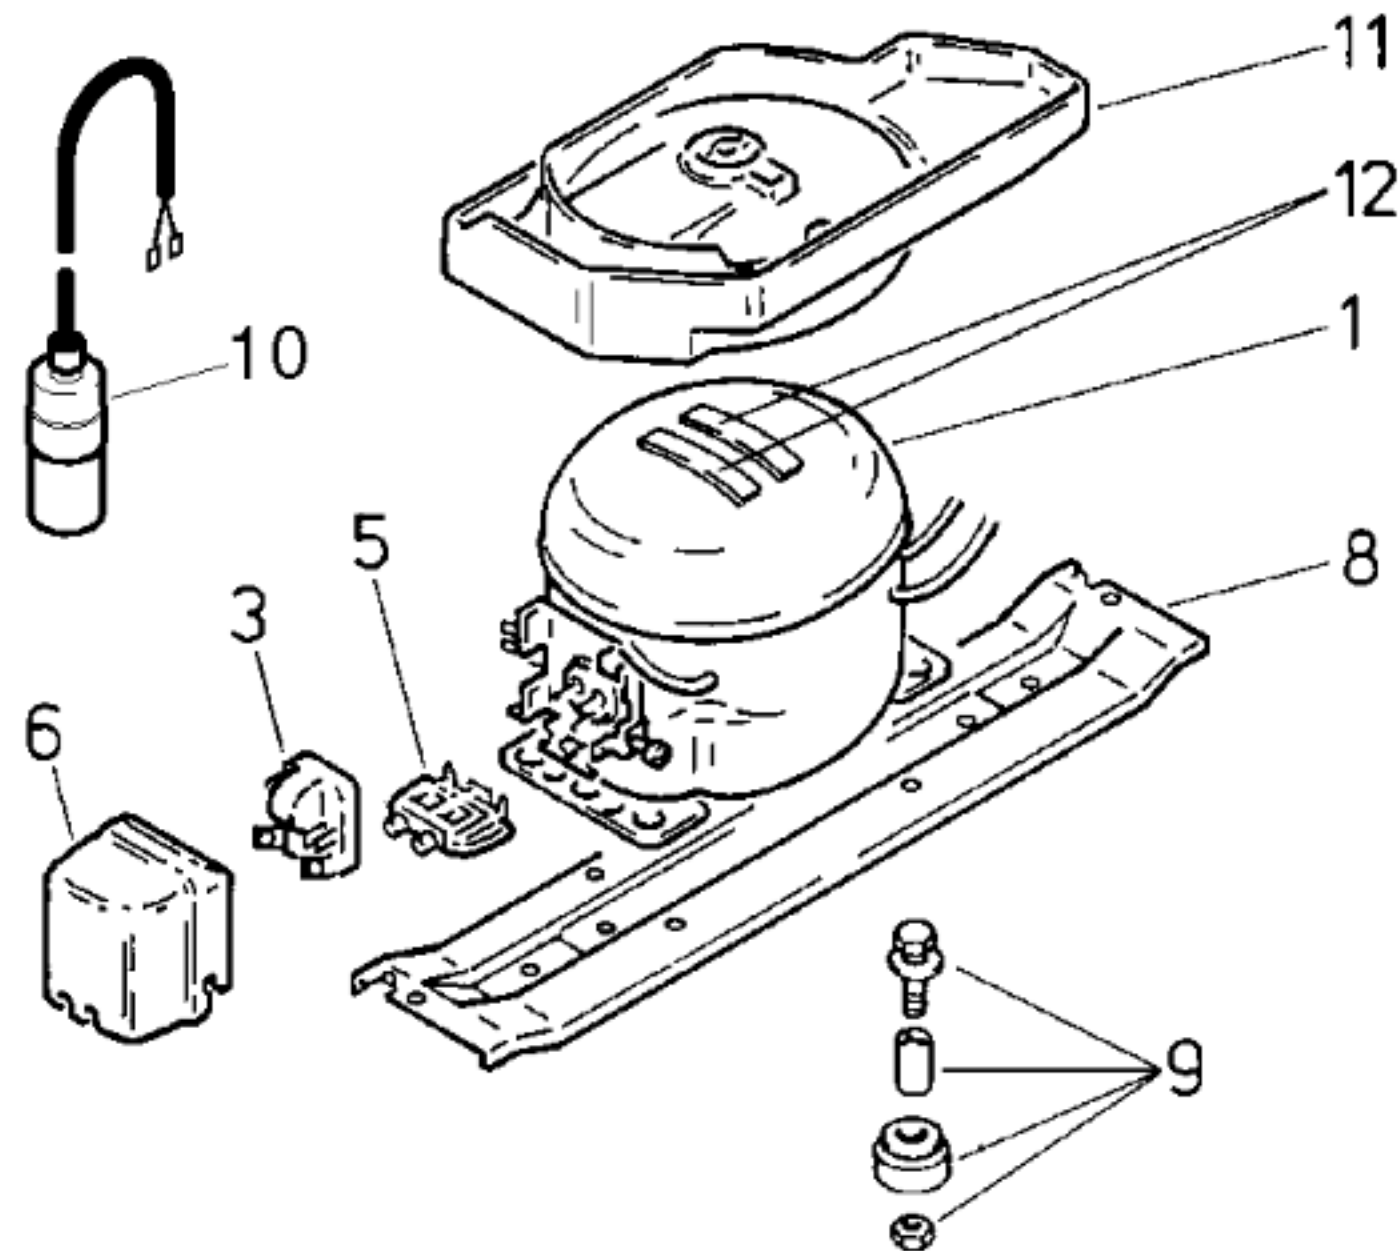

Pos.	V01	V02	
	Danfoss	Matsushita	
	TLES 7 K	SD 65 E	
1	14 1239	14 1316	
2			
3	15 1055	03 2035	
4			
5	15 0760		
6	15 1072	05 8458	
7			
8	27 0291	27 0291	
9	05 0166	05 0166	
10			
11	08 4744	08 8893	
12	05 6008	05 6008	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES			
Verdichter/Compressor/Compresseur	Danfoss	Matsushita	
Typ/Type	TLES 7 K	SD 65 E	
Förderleistung/Delivery/Débit	l/h	1168	1170
Anlaufstrom/Starting current/Cour de démarrage	A	4,5	
Widerstand/Resistance/Résistance	Ha/main/prin. Ω	16,5	
	Hi/aux Ω	16,9	
Temp.-Regler/Thermostat	WHF		
Typ/Type	TF 57 F1		
Reglerstellung/Position	kalt warm		
Schaltwerte/Switching values/	„ein“ $^{\circ}\text{C}$	+5 +5	
Valeurs de commutation	„aus“	-27 -12	
(„abtauen“ od.)	„alarm“		
Füllmenge/Fill.quantity/Charge	R600a	g	26
Anschlußwert/Conn.load/Puiss. connectée	W	110	
Heizung/Heater/Chauffage			
Widerstand/Resistance/Résistance	Ω		
Leistung/Power/Puissance	W		
Ventilator/Blower/Ventilateur			
Widerstand/Resistance/Résistance	Ω		
Schaltuhr/Timer/Minuterie de contact			
Widerstand/Resistance/Résistance	Ω		
Magnetventil/Magnetic valve/Electrovanne			
Widerstand/Resistance/Résistance	Ω		
Spannung/Voltage/Tension	V		