


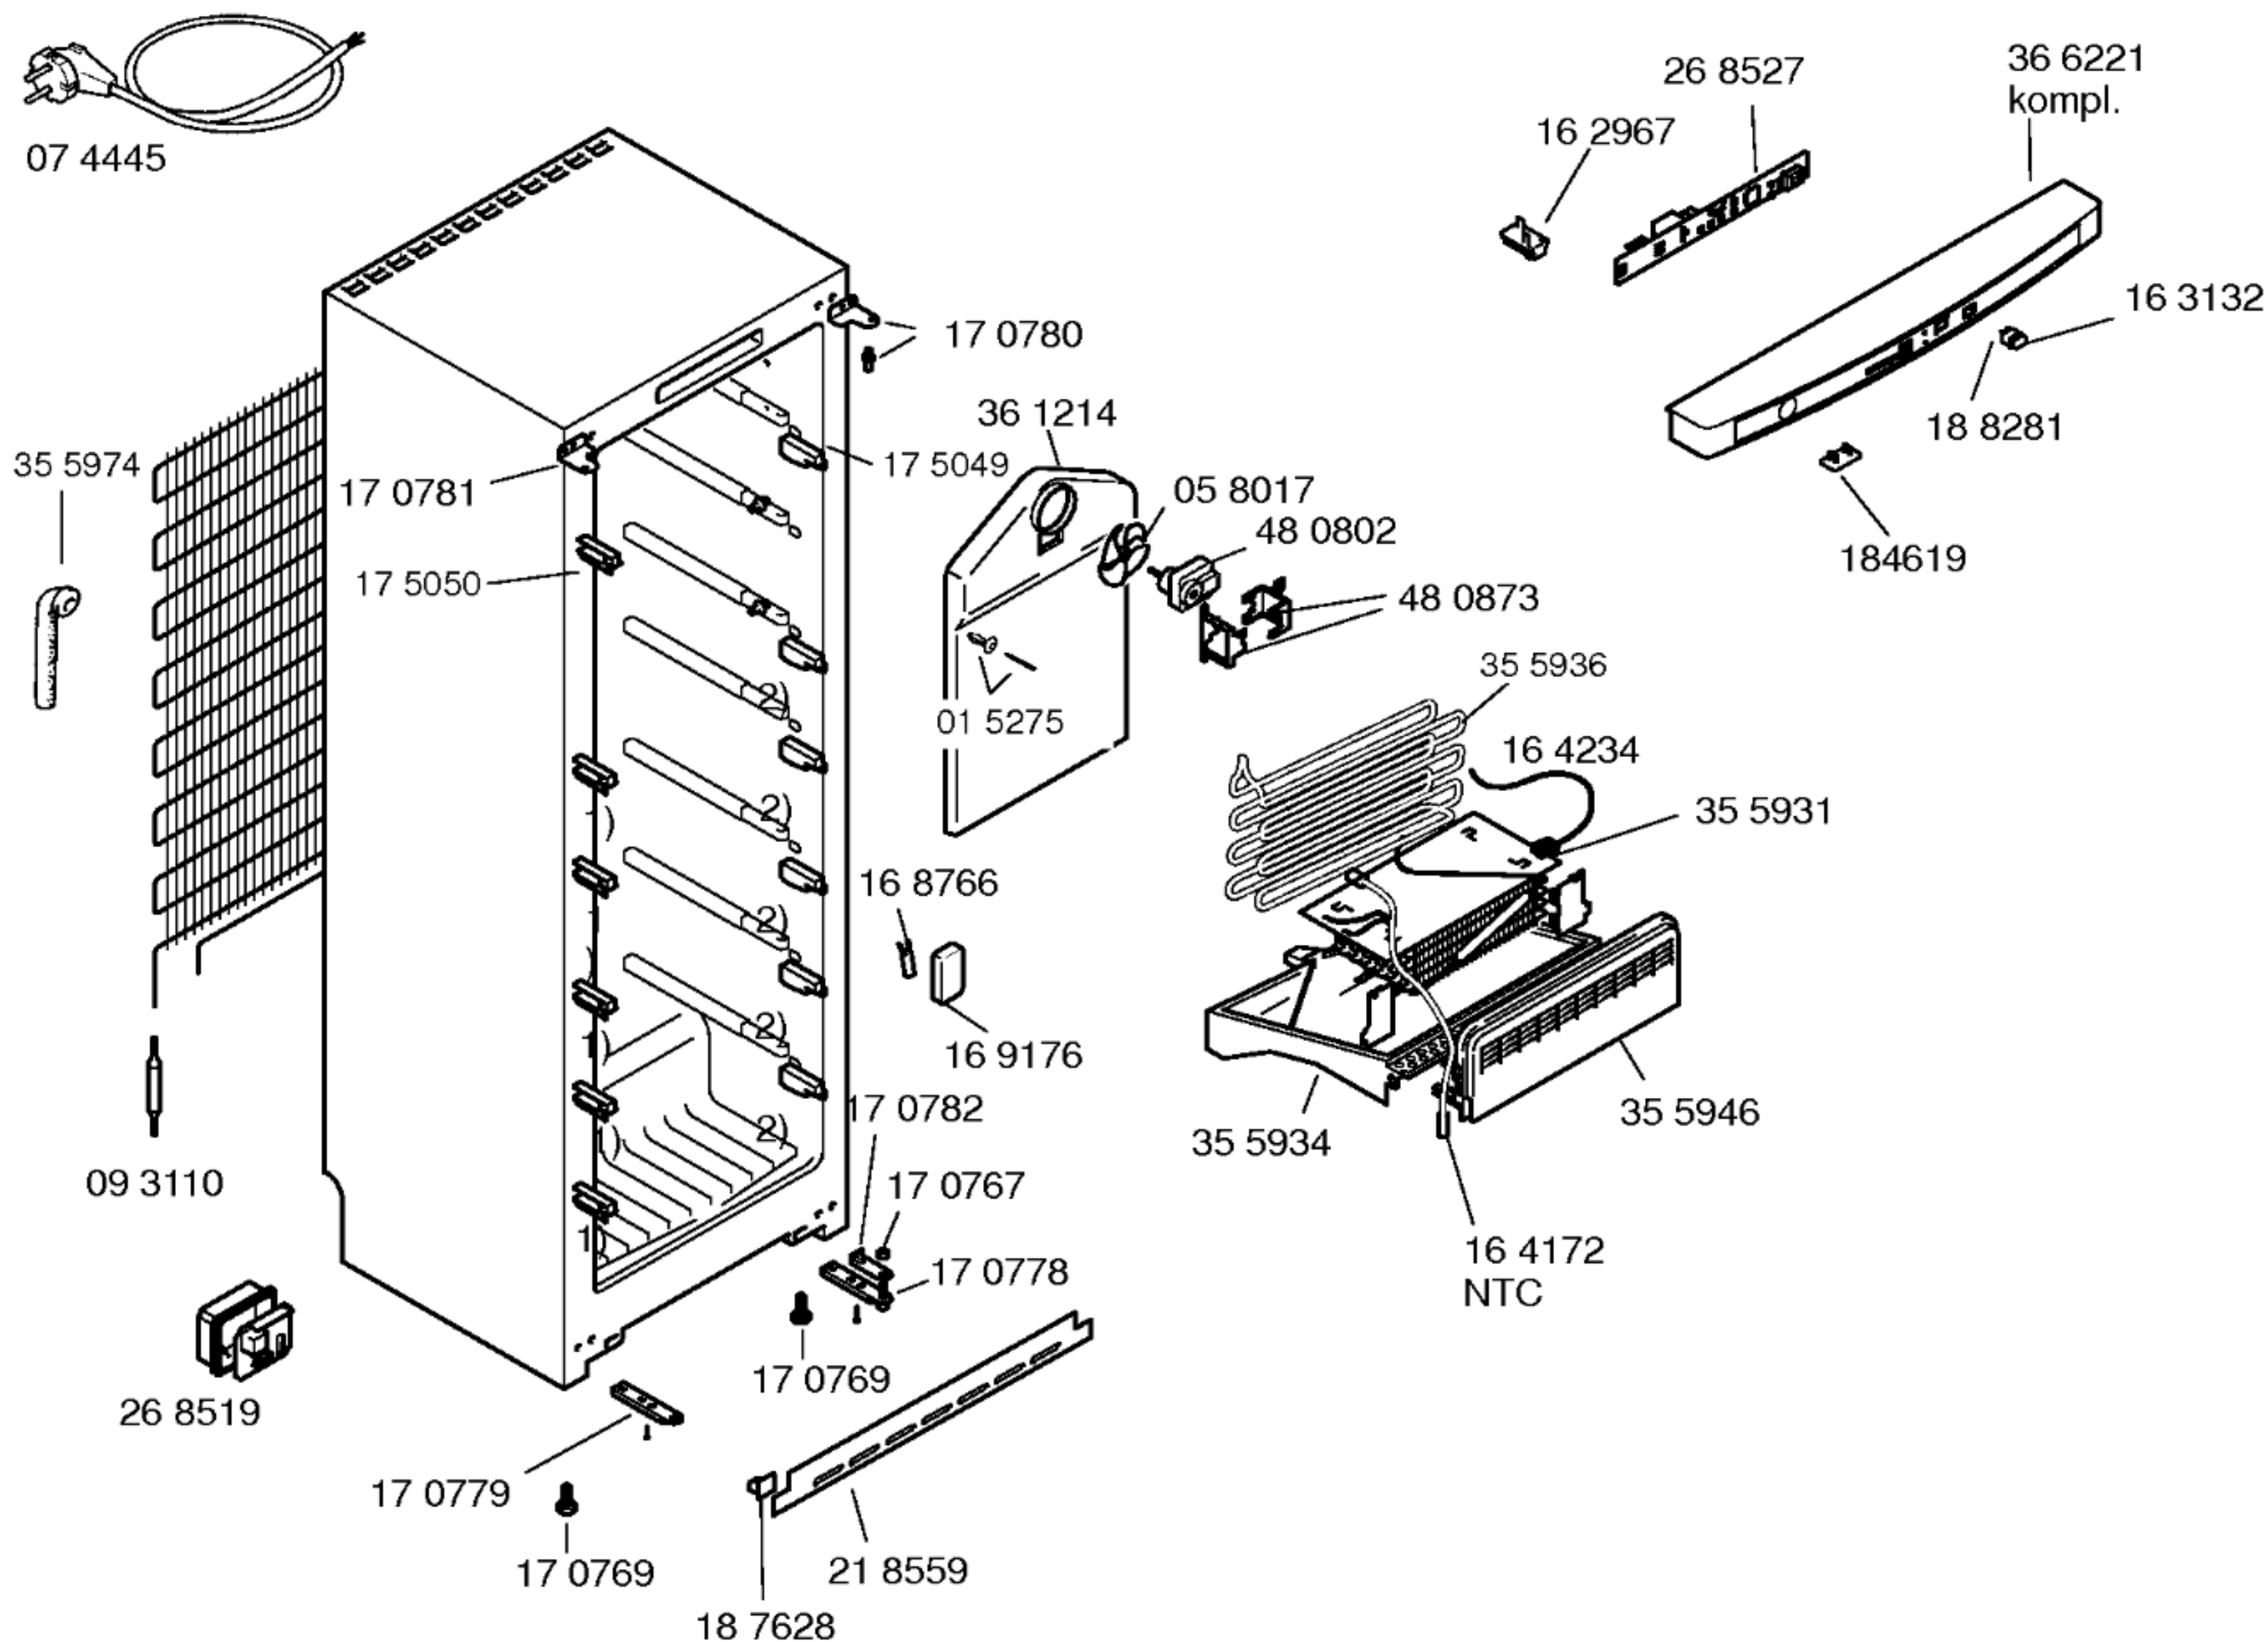




Gebrauchsanweisung
58 0914
(D,GB,F,I,NL,E,P)
58 0915
(DK,N,SF,S)
Montageanleitung
58 0241
(D,GB,F,I,NL,DK,N
SF,S,E,P,TR,GR)


Beistellsatz
26 5629

Side by Side
Beistellsatz zu KSR/KSK
48 1044

Gefrierraumteiler
35 3678

1) 17 1455
2) 17 1454

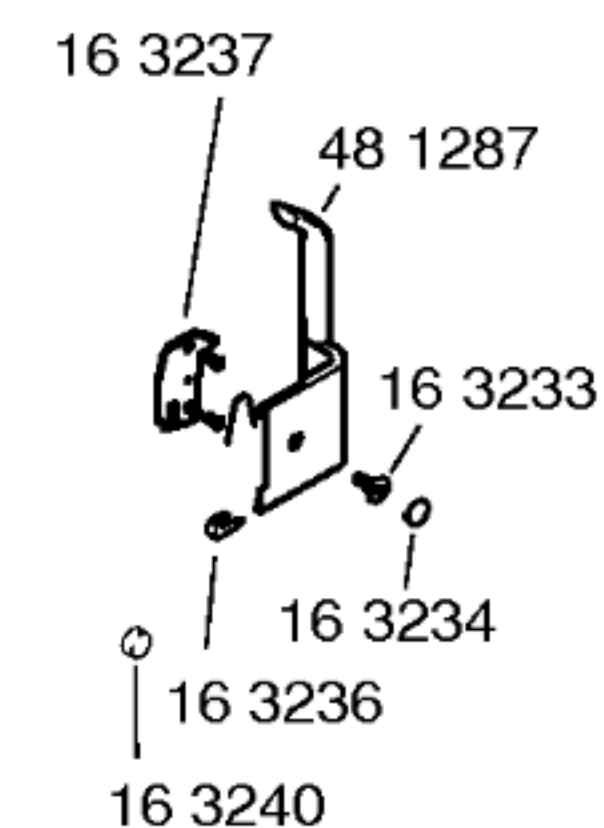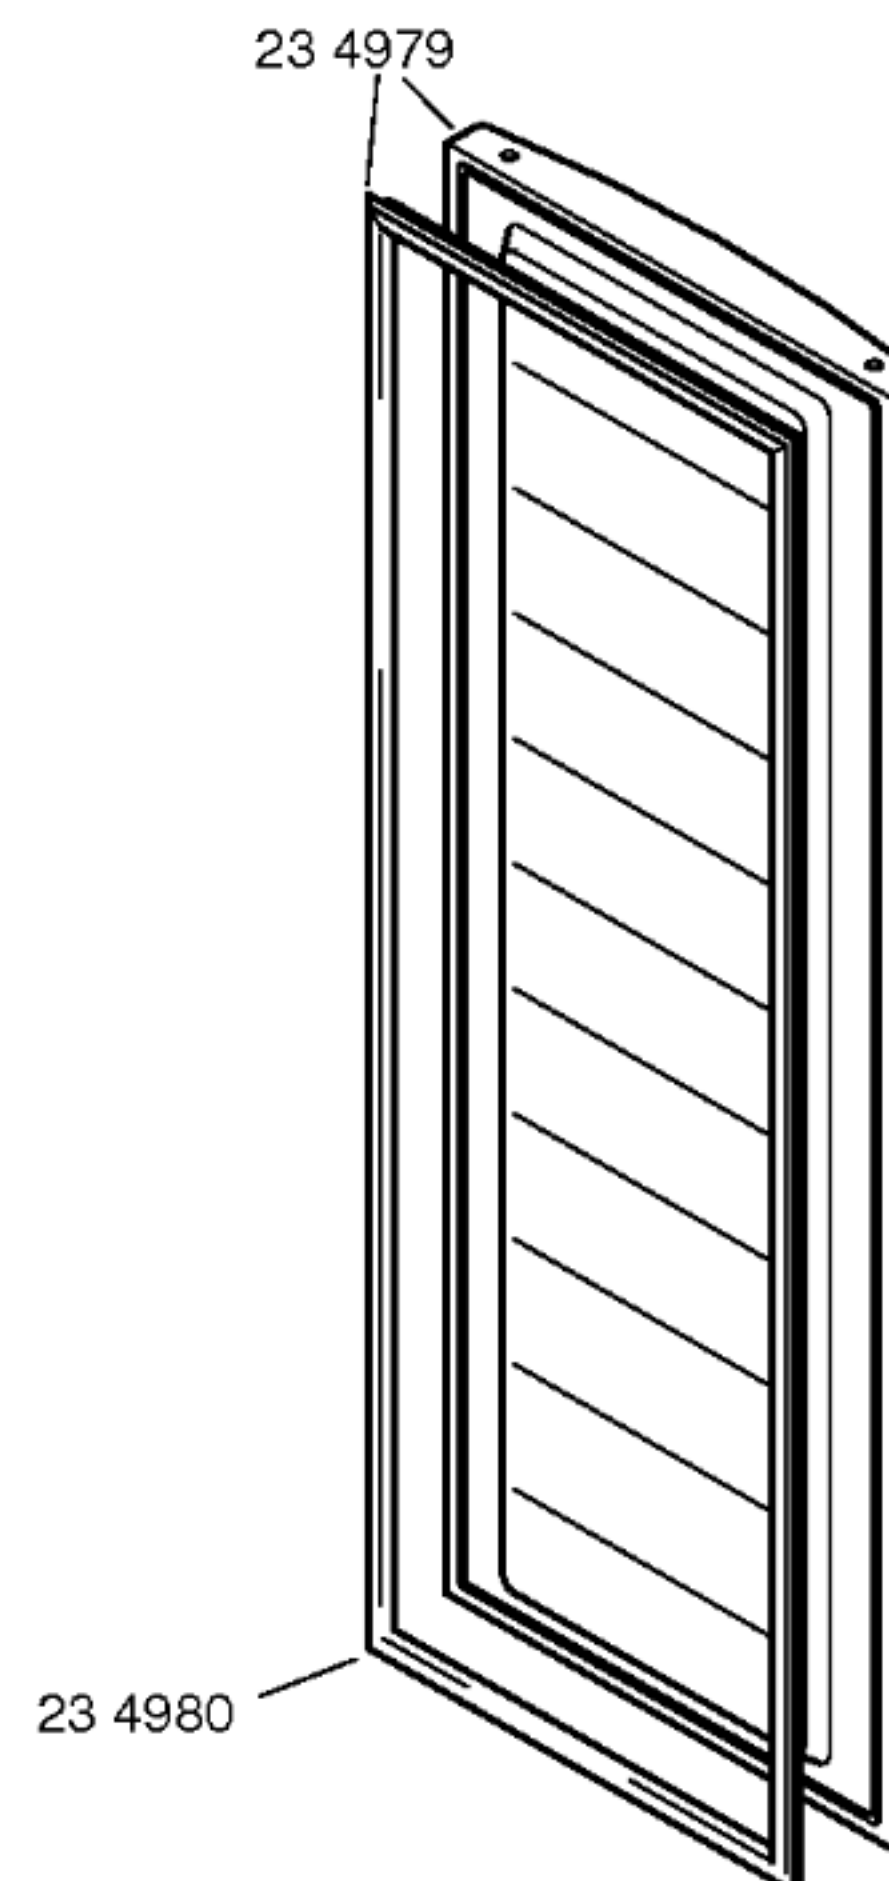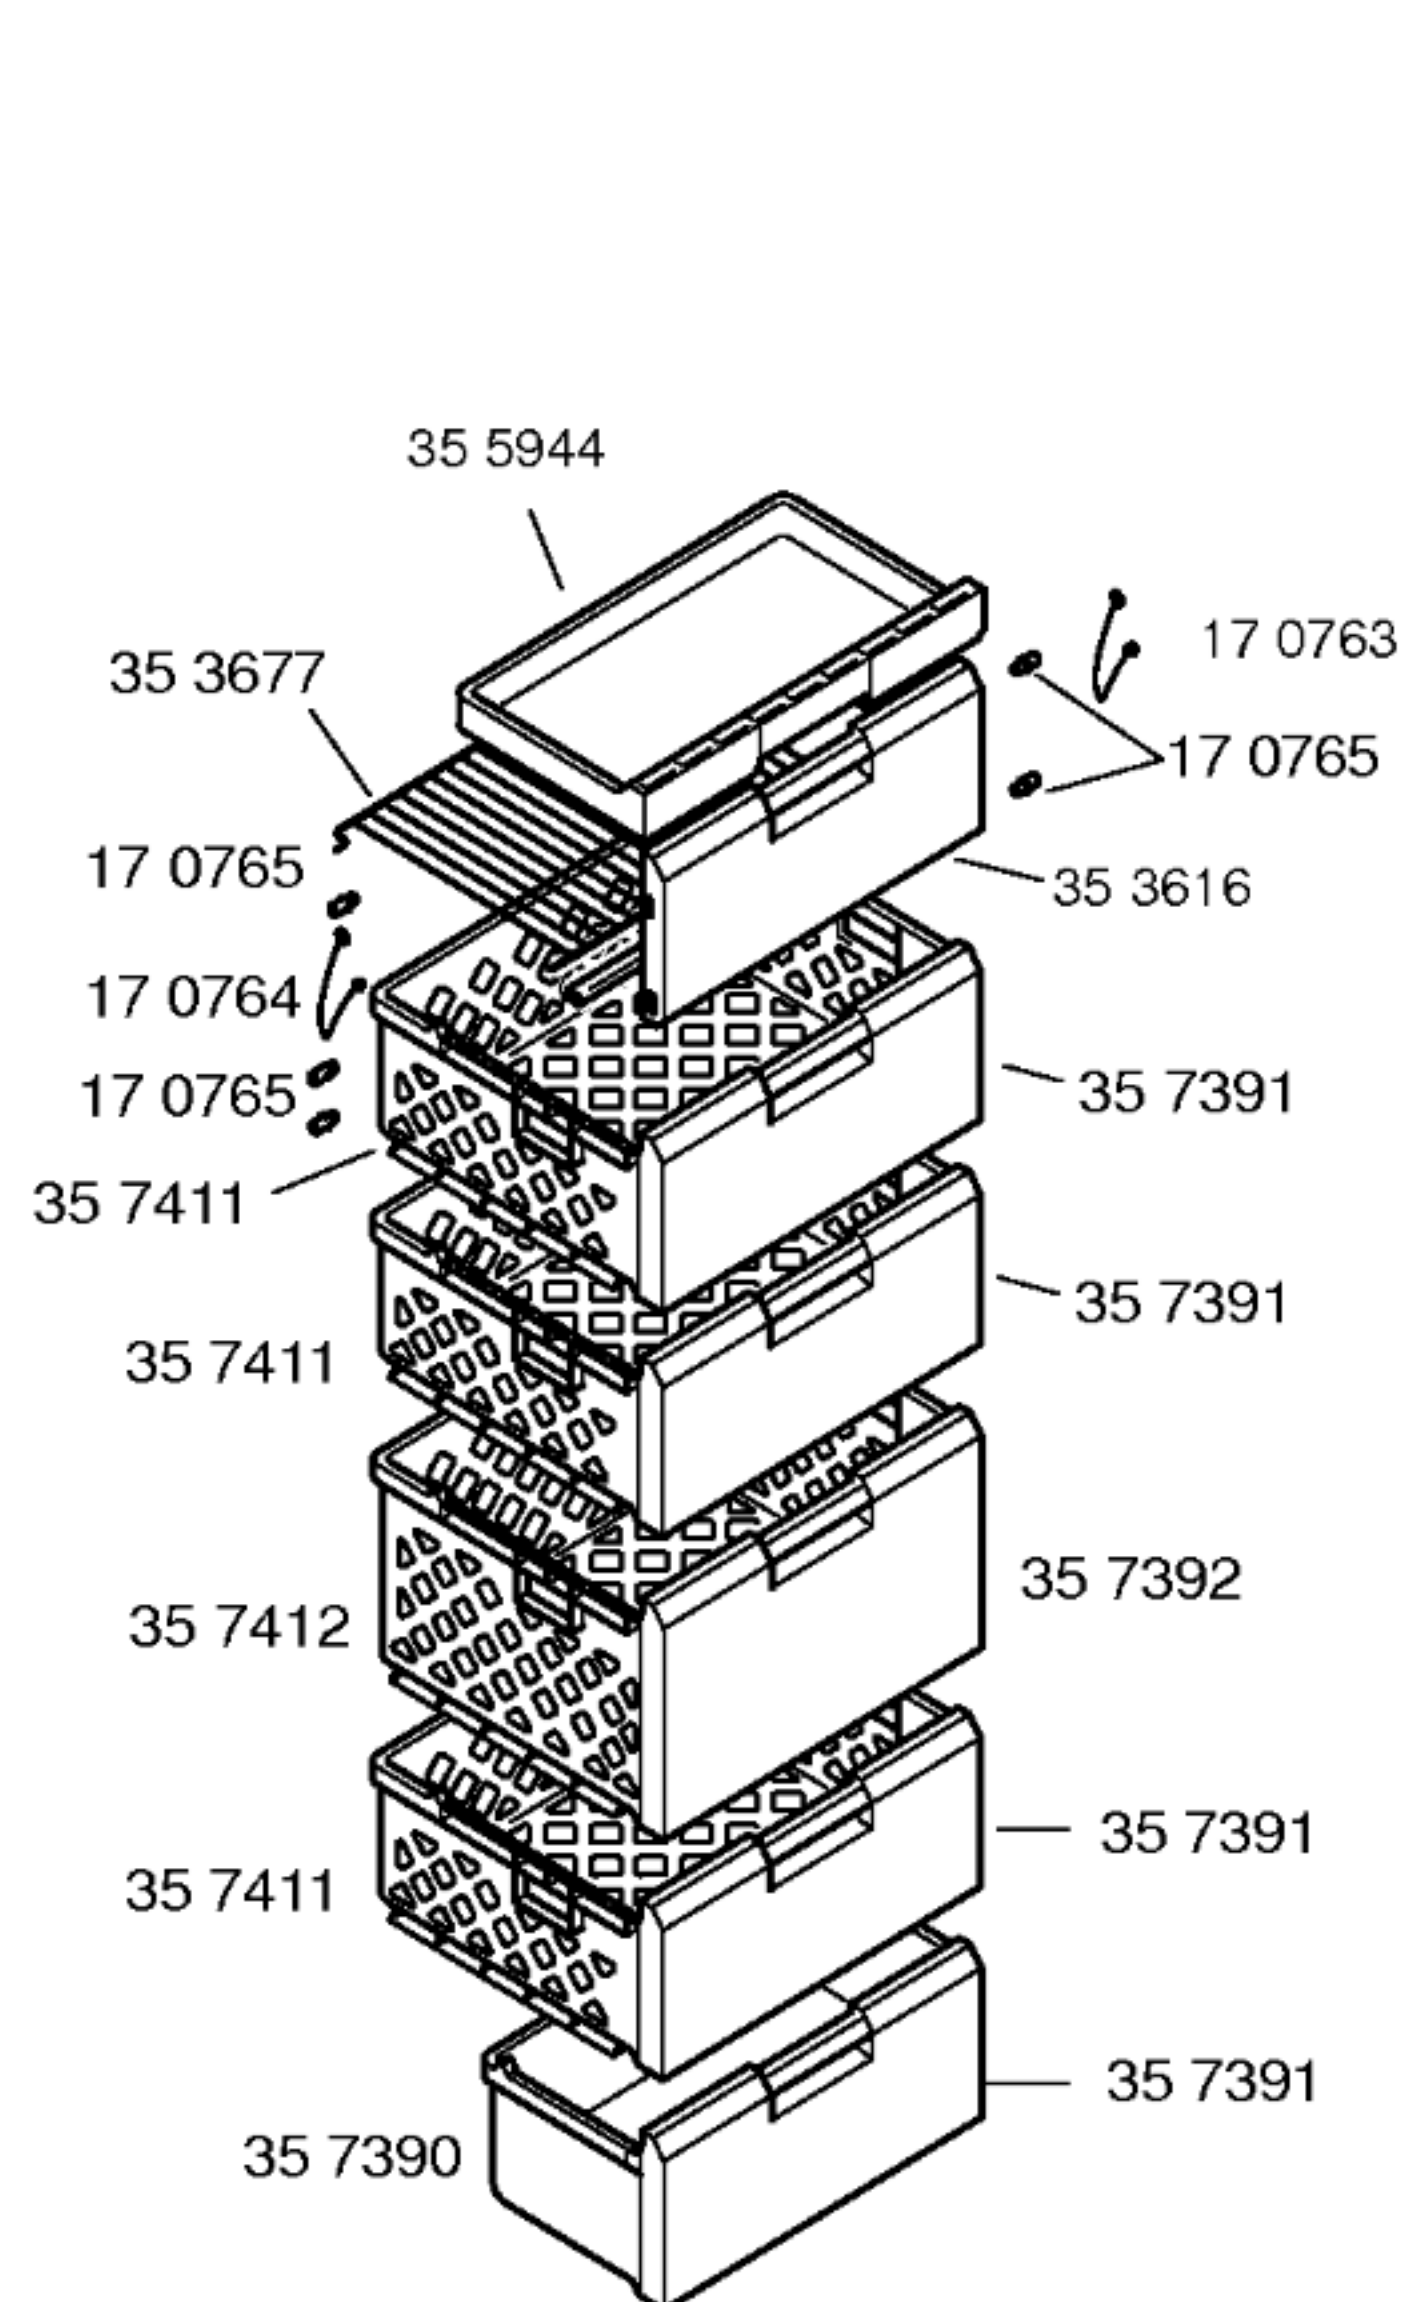

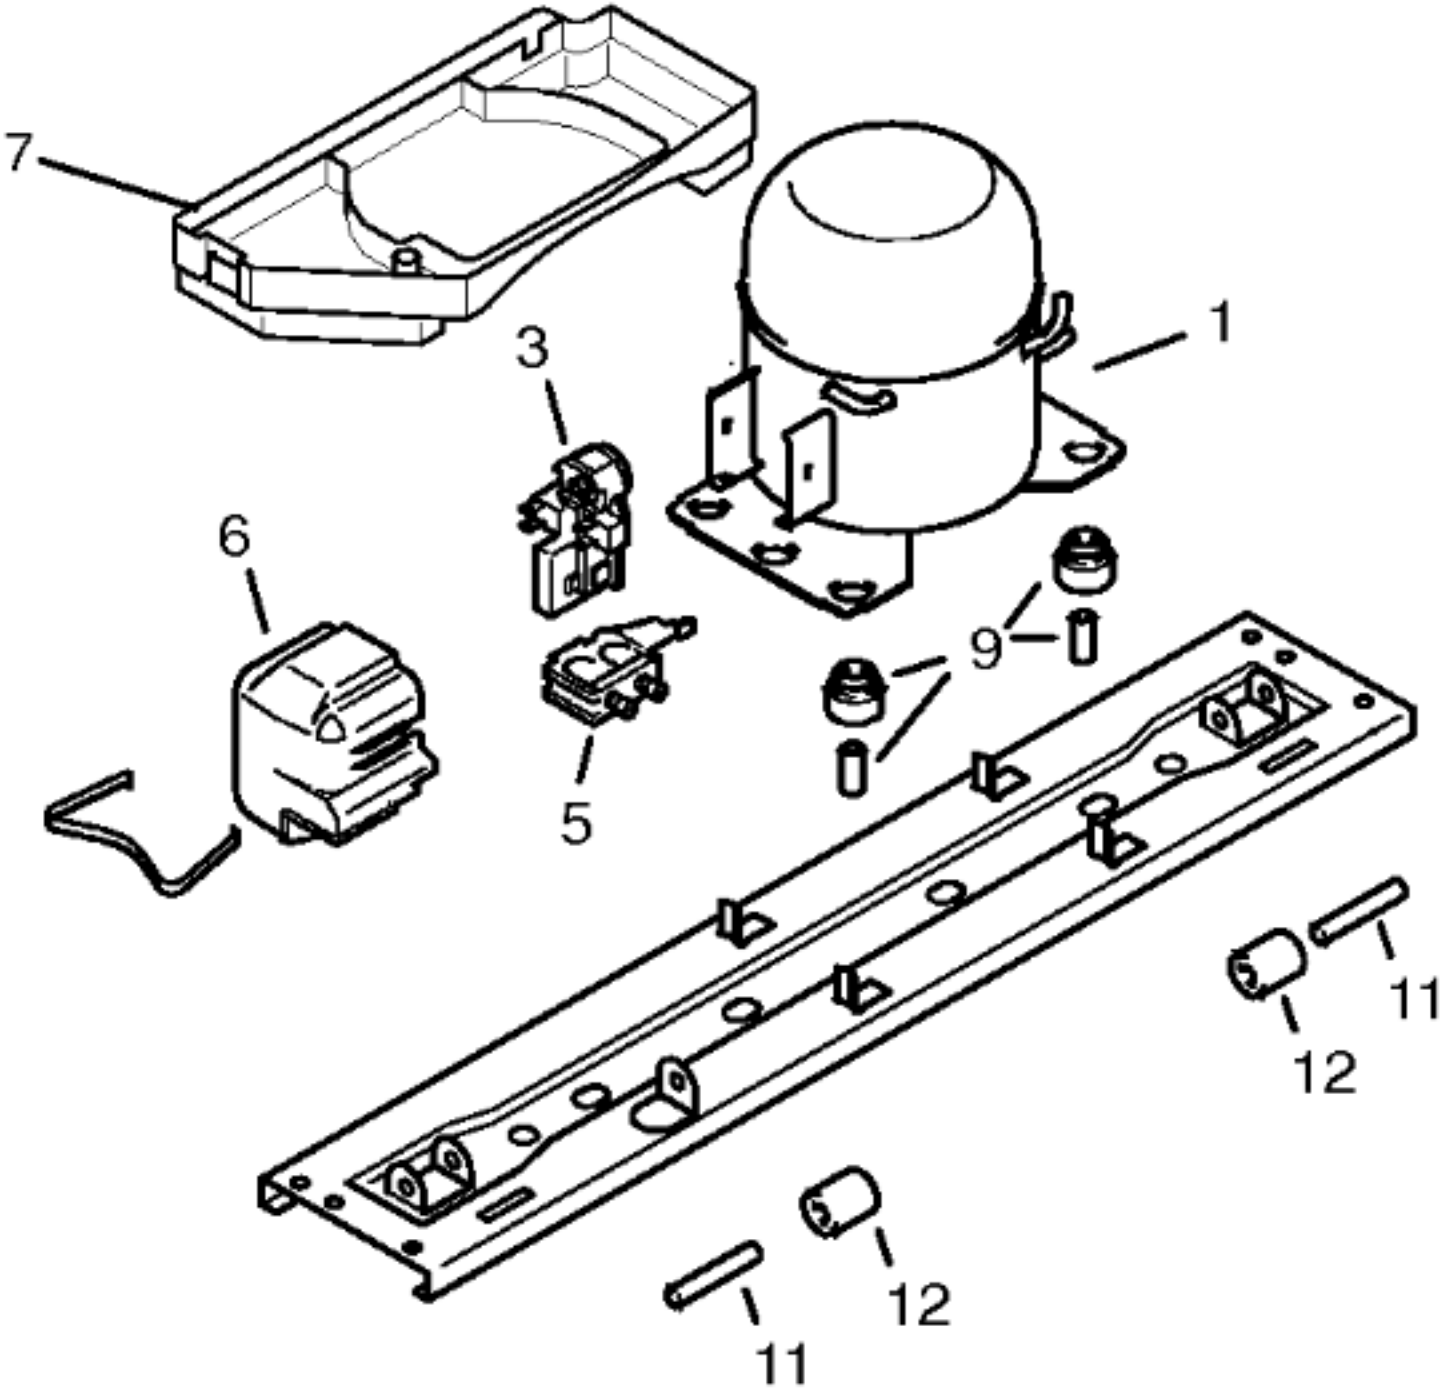

	V01	V02	
	Danfoss	Matsushita	
Pos.	NLY13K	DC 125 E	
1	14 1747	14 2131	
2			
3	15 1055	17 2967	
4			
5	15 0760	16 2549	
6	15 1072	16 6782	
7	09 6212	26 9945	
8			
9	05 0166	05 0166	
10			
11	01 9017	01 9017	
12	01 9016	01 1916	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES					
Verdichter/Compressor/Compresseur		Danfoss		Matsushita	
Typ/Type		NLY13K		DC 125 E	
Förderleistung/Delivery/Débit		l/h	2394	2246	
Anlaufstrom/Starting current/Cour de démarrage		A	11,3	9,2	
Widerstand/Resistance/Résistance		Ha/main/prin	Ω	11,0	12,1
		Hi/aux	Ω	9,0	13,8
Temp.-Regler/Thermostat		Elektronisch			
Typ/Type		EIN		AUS	
Regelstellung/Position		-15		-16	
Schaltwerte/Switching values		"warm"		-19	
Valeurs de commutation		"kalt"		-23	
		"alarm"		-9	
Füllmenge/Fill.quantity/Charge		R600a	*	*	
Anschlußwert/Conn.load/Puiss. connectée		W	133	120	
Heizung/Heater/Chauffage		Abtauheizung		Rinnenheizung	
Widerstand/Resistance/Résistance		Ω	288	240	
Leistung/Power/Puissance		W	200	24	
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance		Ω	560		
Raumtemperaturfühler		C	K	C	k
		+10	9,9	-18	43,3
		+5	12,7	-22	54,6
		+0	16,3	-26	69,4
Widerstand NTC-Fühler		°C	kΩ	°C	kΩ
		-1	17,3	-15	36,5
		-9	26,2	-16	38,8
		-14	34,5	-19	45,9
Magnetventil/Magnetic valve/Electrovanne				-24	
Widerstand/Resistance/Résistance		Ω		61,6	
Spannung/Voltage/Tension		V			

* siehe Typenschild