


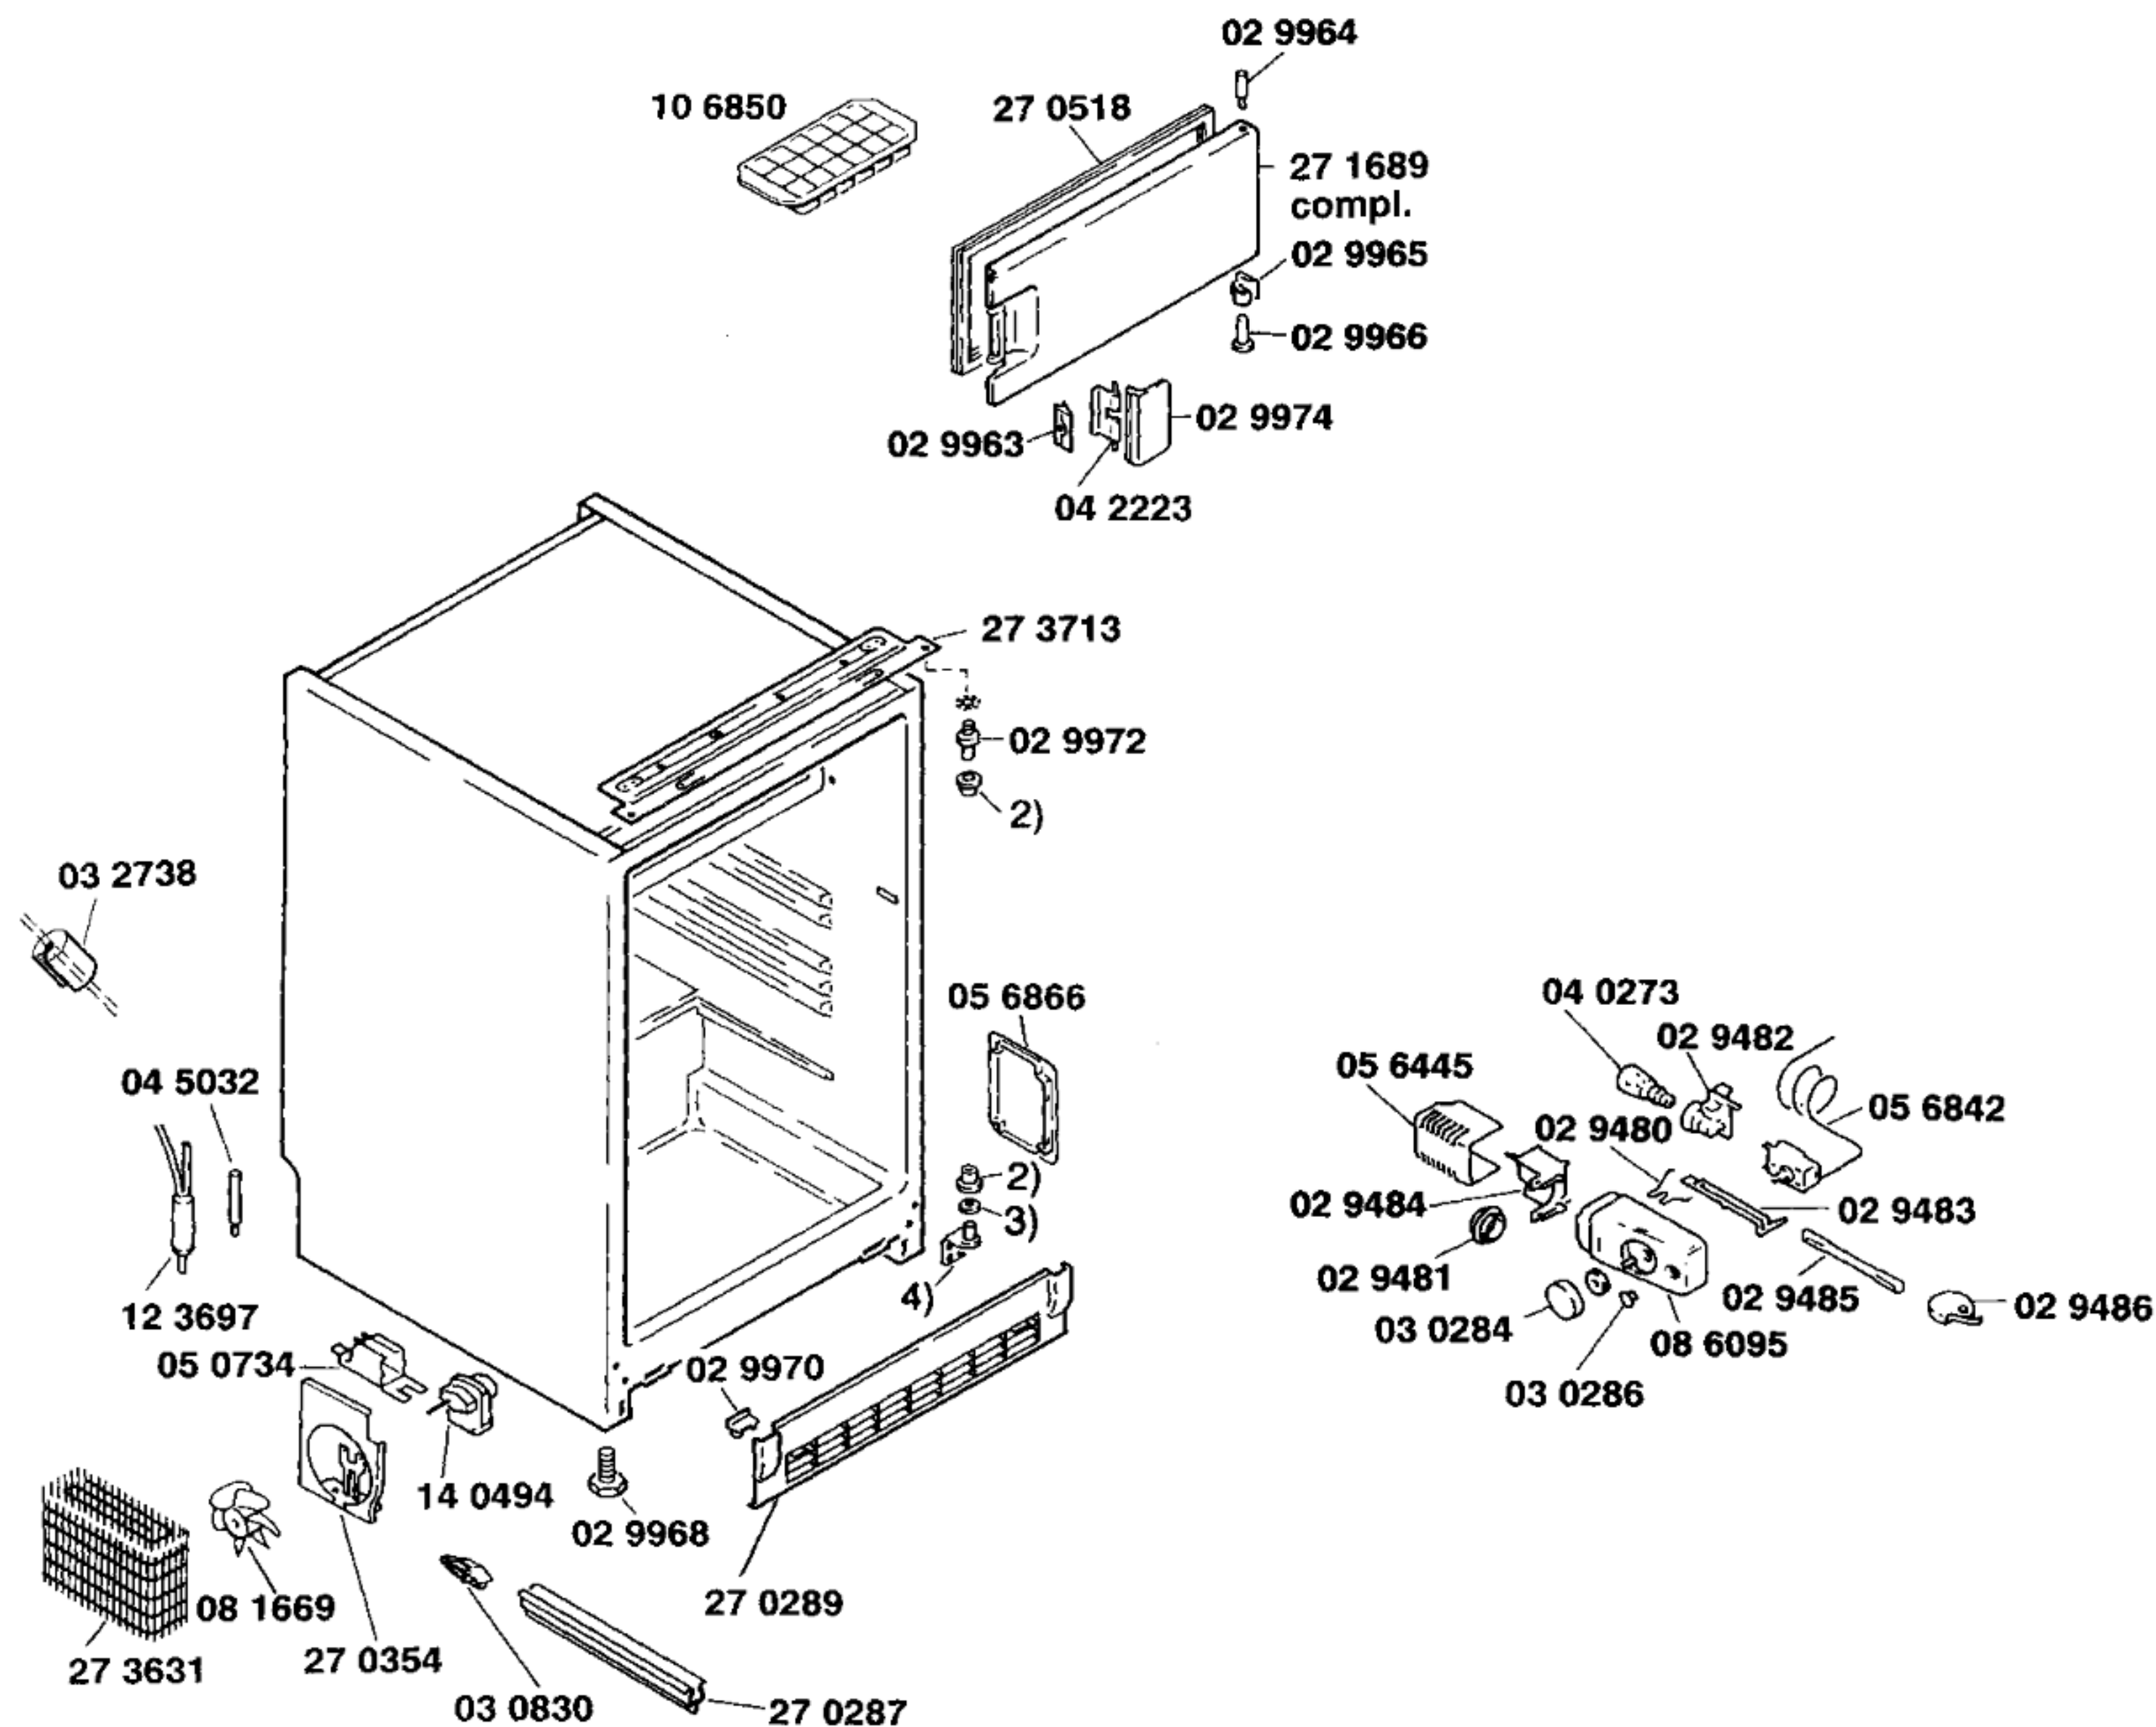

51 4331
Gebrauchsanweisung
(D,GB,F,I,NL,S,SF,E,P,
DK,N)

51 4009
Montageanweisung
(D,GB,F,I,NL,S,SF,E,P,
DK,N)

2) 01 9257


3) 02 0605


4) 02 9971

Zubehör:

Dekorrahmen
Z4110A1,Alu
Z4110W1,weiss

Sockel
Z4510X0

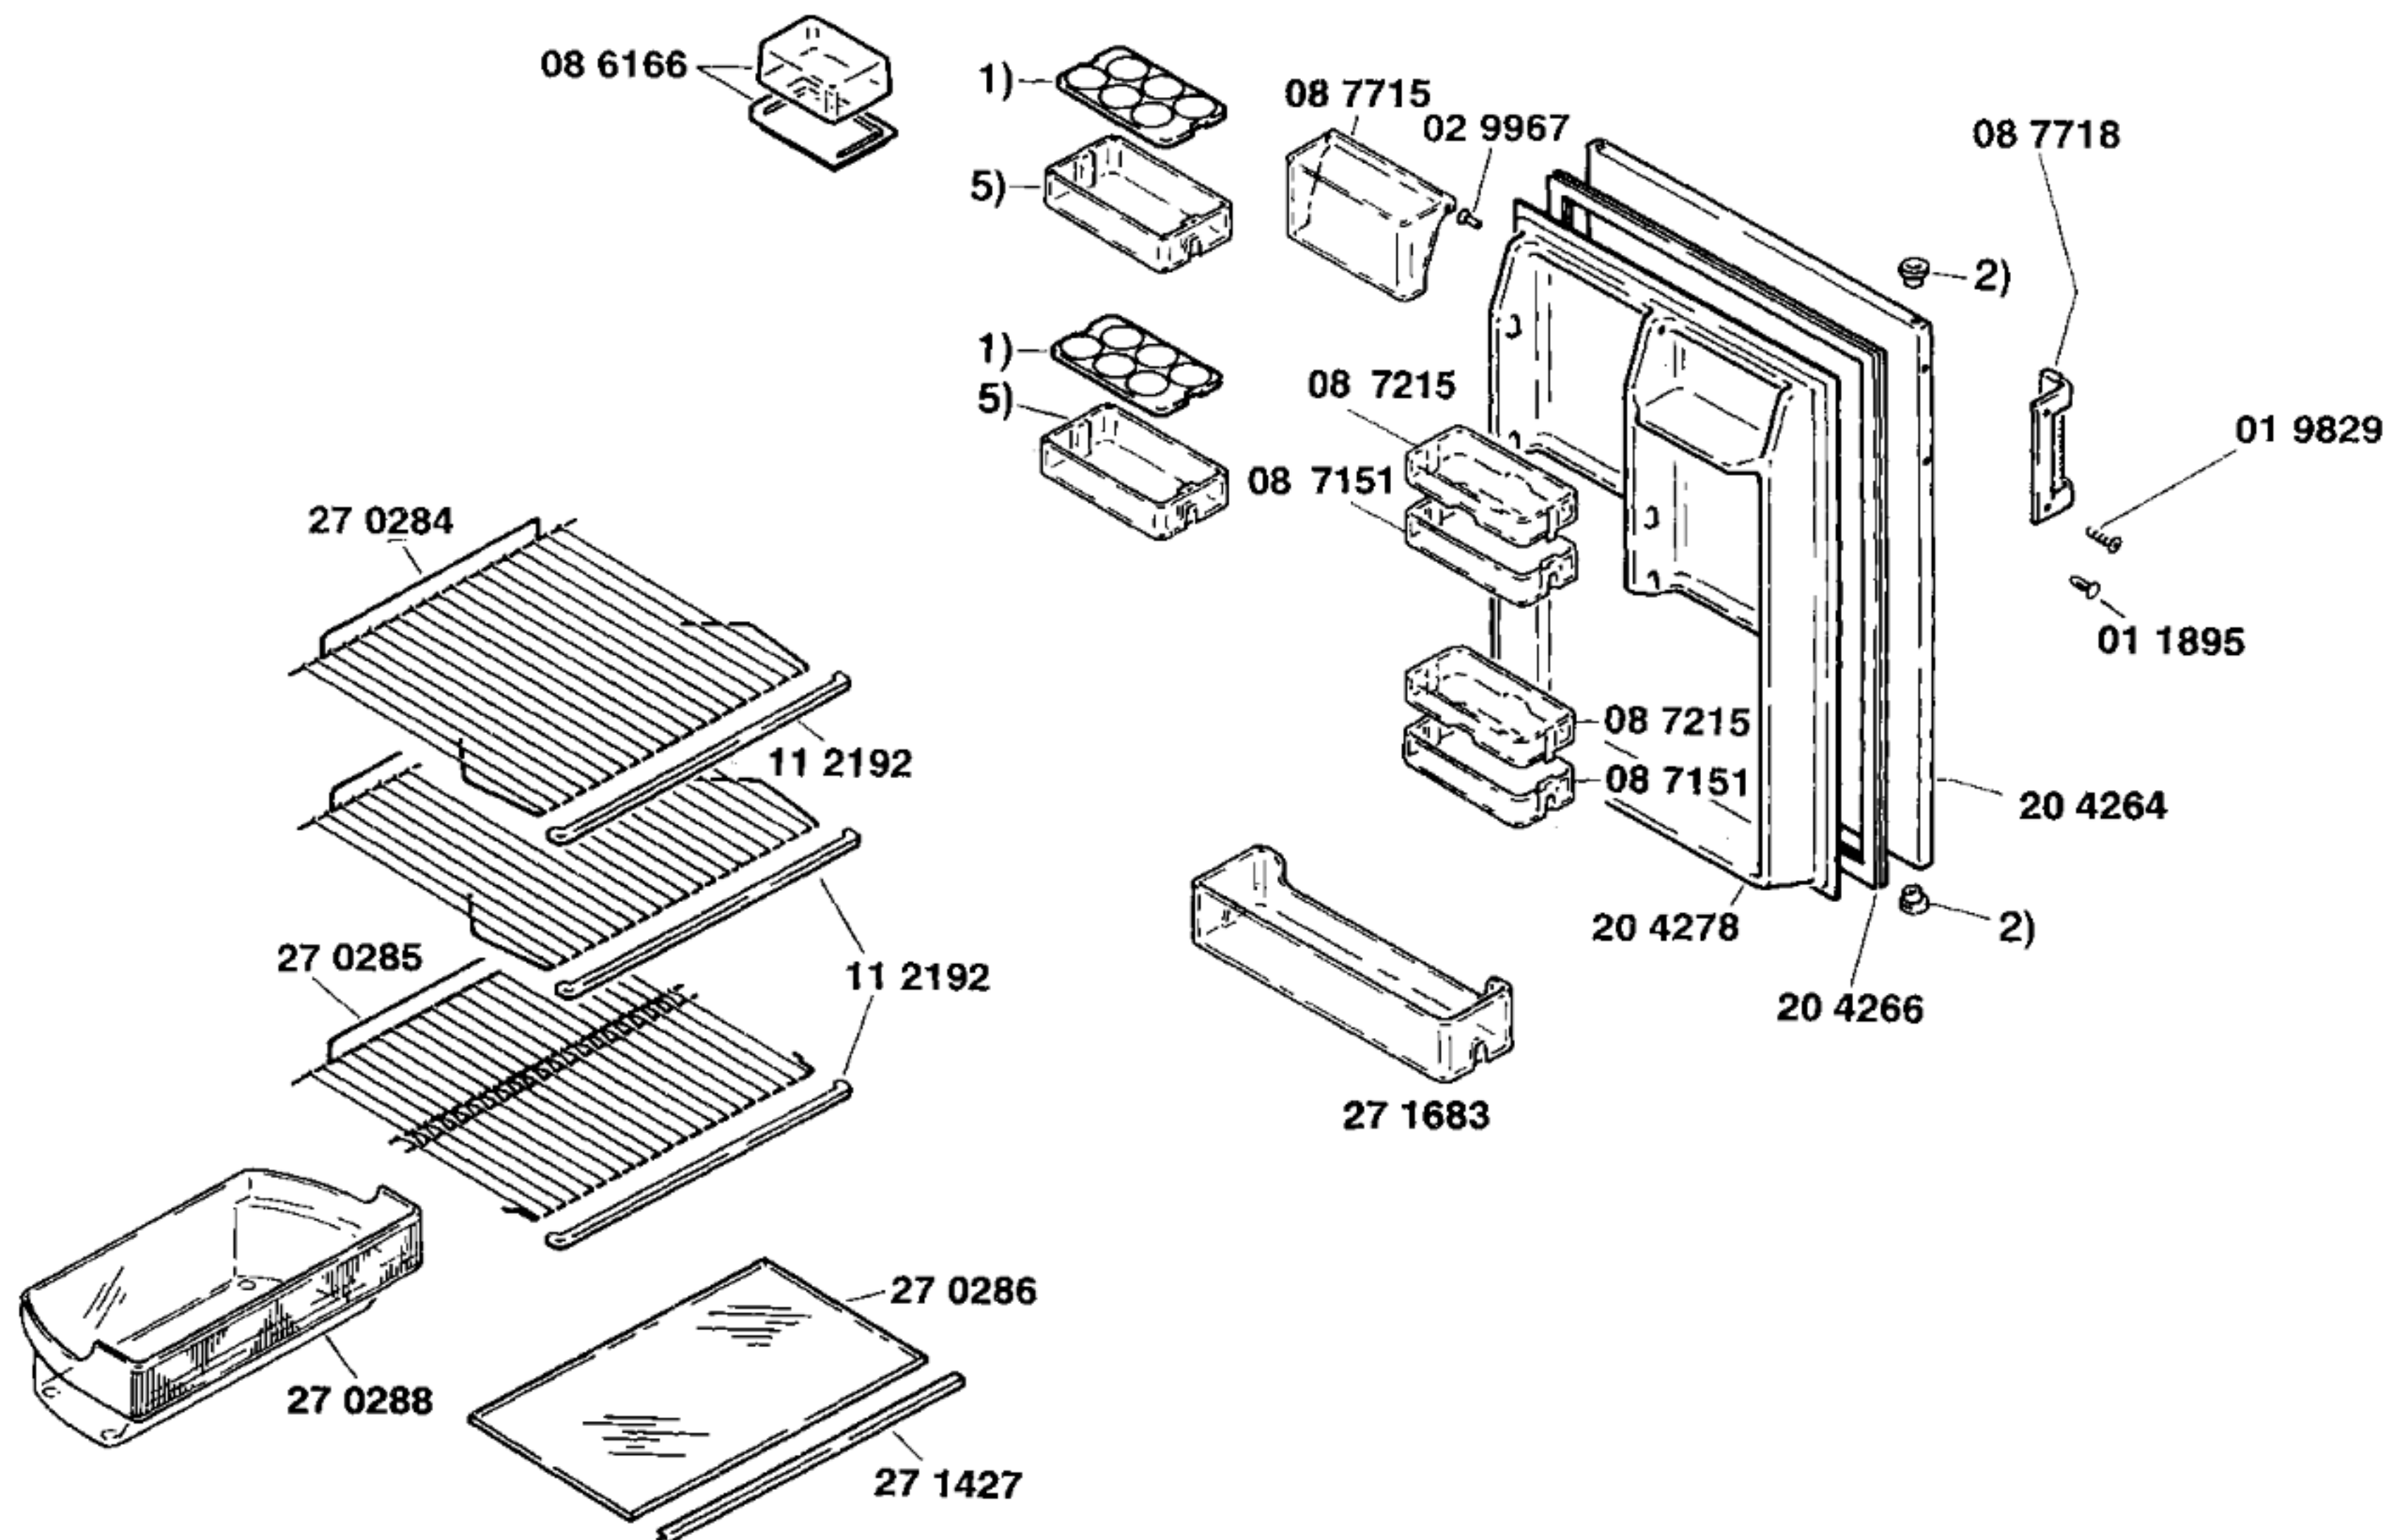

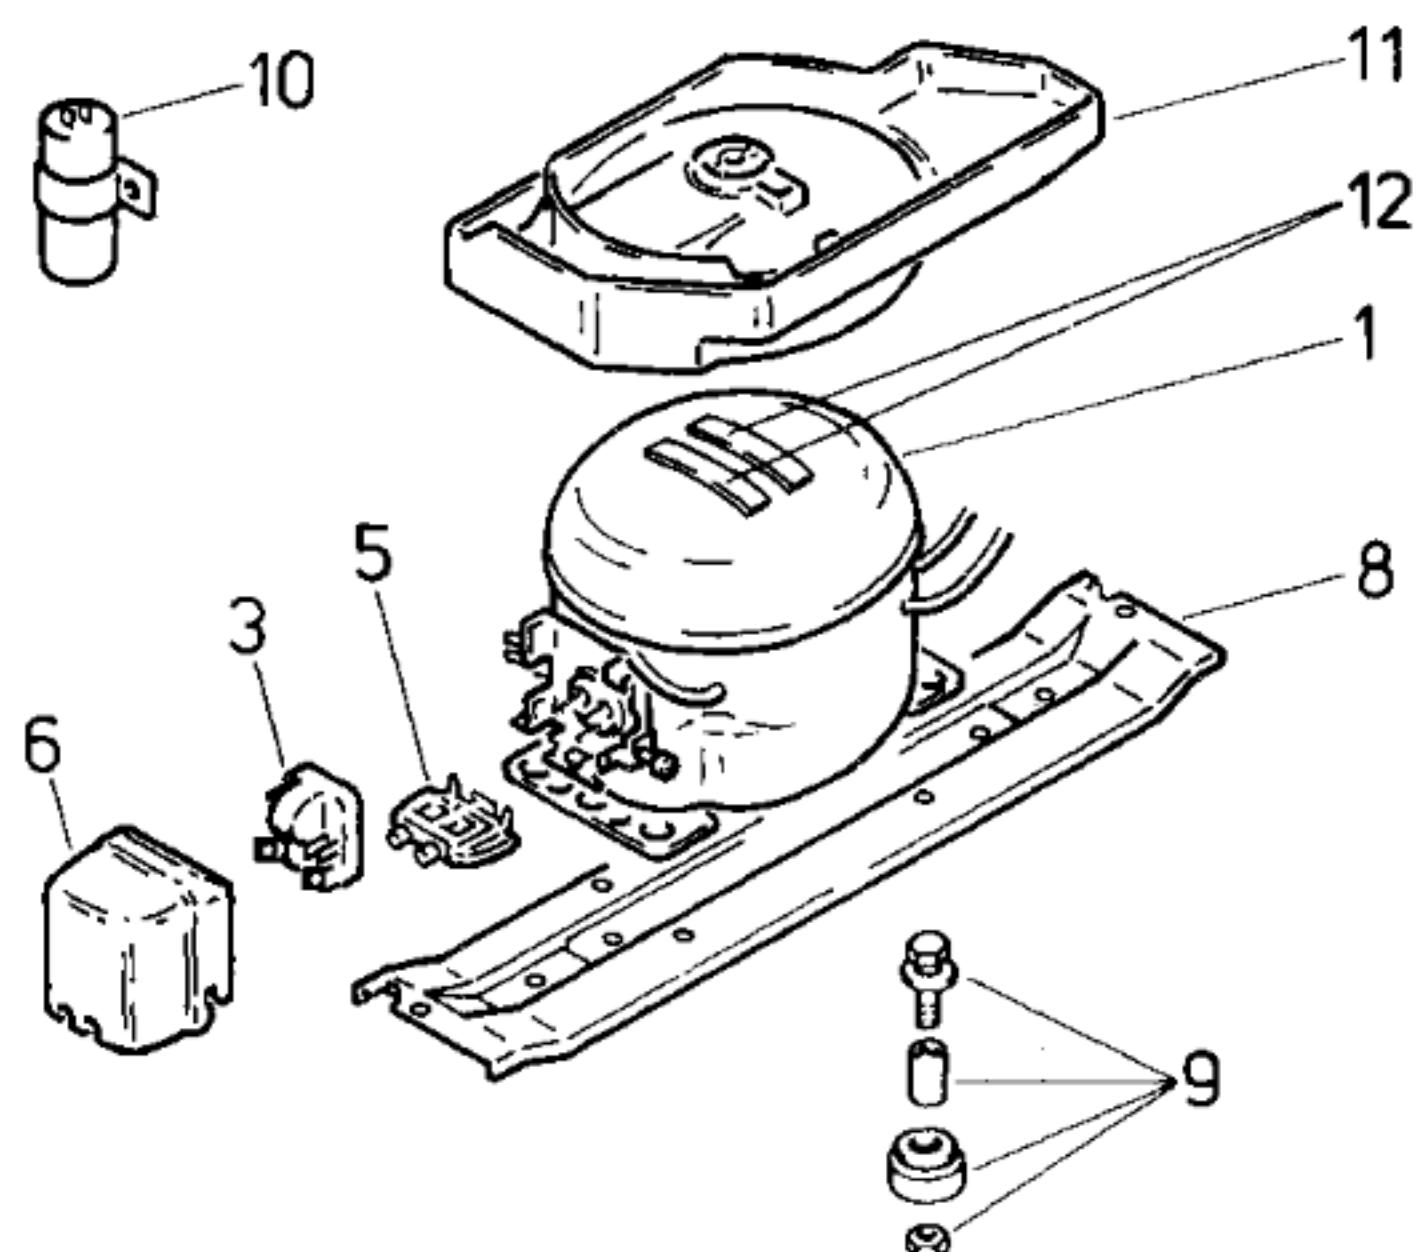

Pos.	EU1	EU2	
	Danfoss TL 4 A	Matsushita S075LKAA	
1	13 1064	14 0599	
2			
3	02 0108	03 2034	
4			
5	02 7310		
6	05 1413	05 8457	
7			
8	27 0291	27 0291	
9	05 0166	05 0166	
10			
11	08 4744	08 8893	
12	05 6008	05 6008	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Danfoss	Matsushita	
Typ/Type		TL 4 A	S075LKAA	
Förderleistung/Delivery/Débit	l/h	695	641	
Anlaufstrom/Starting current/Cour. de démarrage	A	8,3	5,7	
Widerstand/Resistance/Résistance	Ha/main/prin.	23,4	24,4	
	Hi/aux	15,5	39,8	

Temp.-Regler/Thermostat		Ranco		
Typ/Type		K 59		
Reglerstellung/Position		kalt	warm	
Schaltwerte/Switching values/	„ein“	+ 4,5	+ 4,5	
Valeurs de commutation	„aus“	- 31,0	- 13,5	
	(„abtauen“ od.)	„alarm“		

Füllmenge/Fill.quantity/Charge	R12	g	130	
--------------------------------	-----	---	-----	--

Anschlußwert/Conn.load/Puiss. connectée		W	110	
---	--	---	-----	--

Heizung/Heater/Chauffage				
Widerstand/Resistance/Resistance		Ω		
Leistung/Power/Puissance		W		

Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		

Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		