



Gebrauchsanweisung
51 3623
(D,GB,F,I,NL,DK,N,S,SF)

- 1) 05 1396
rechts
05 1397
links
- 2) 27 0816
- 3) 05 6867

Zubehör:

Dekorrahmen
KZ11130SF_{gr-br}

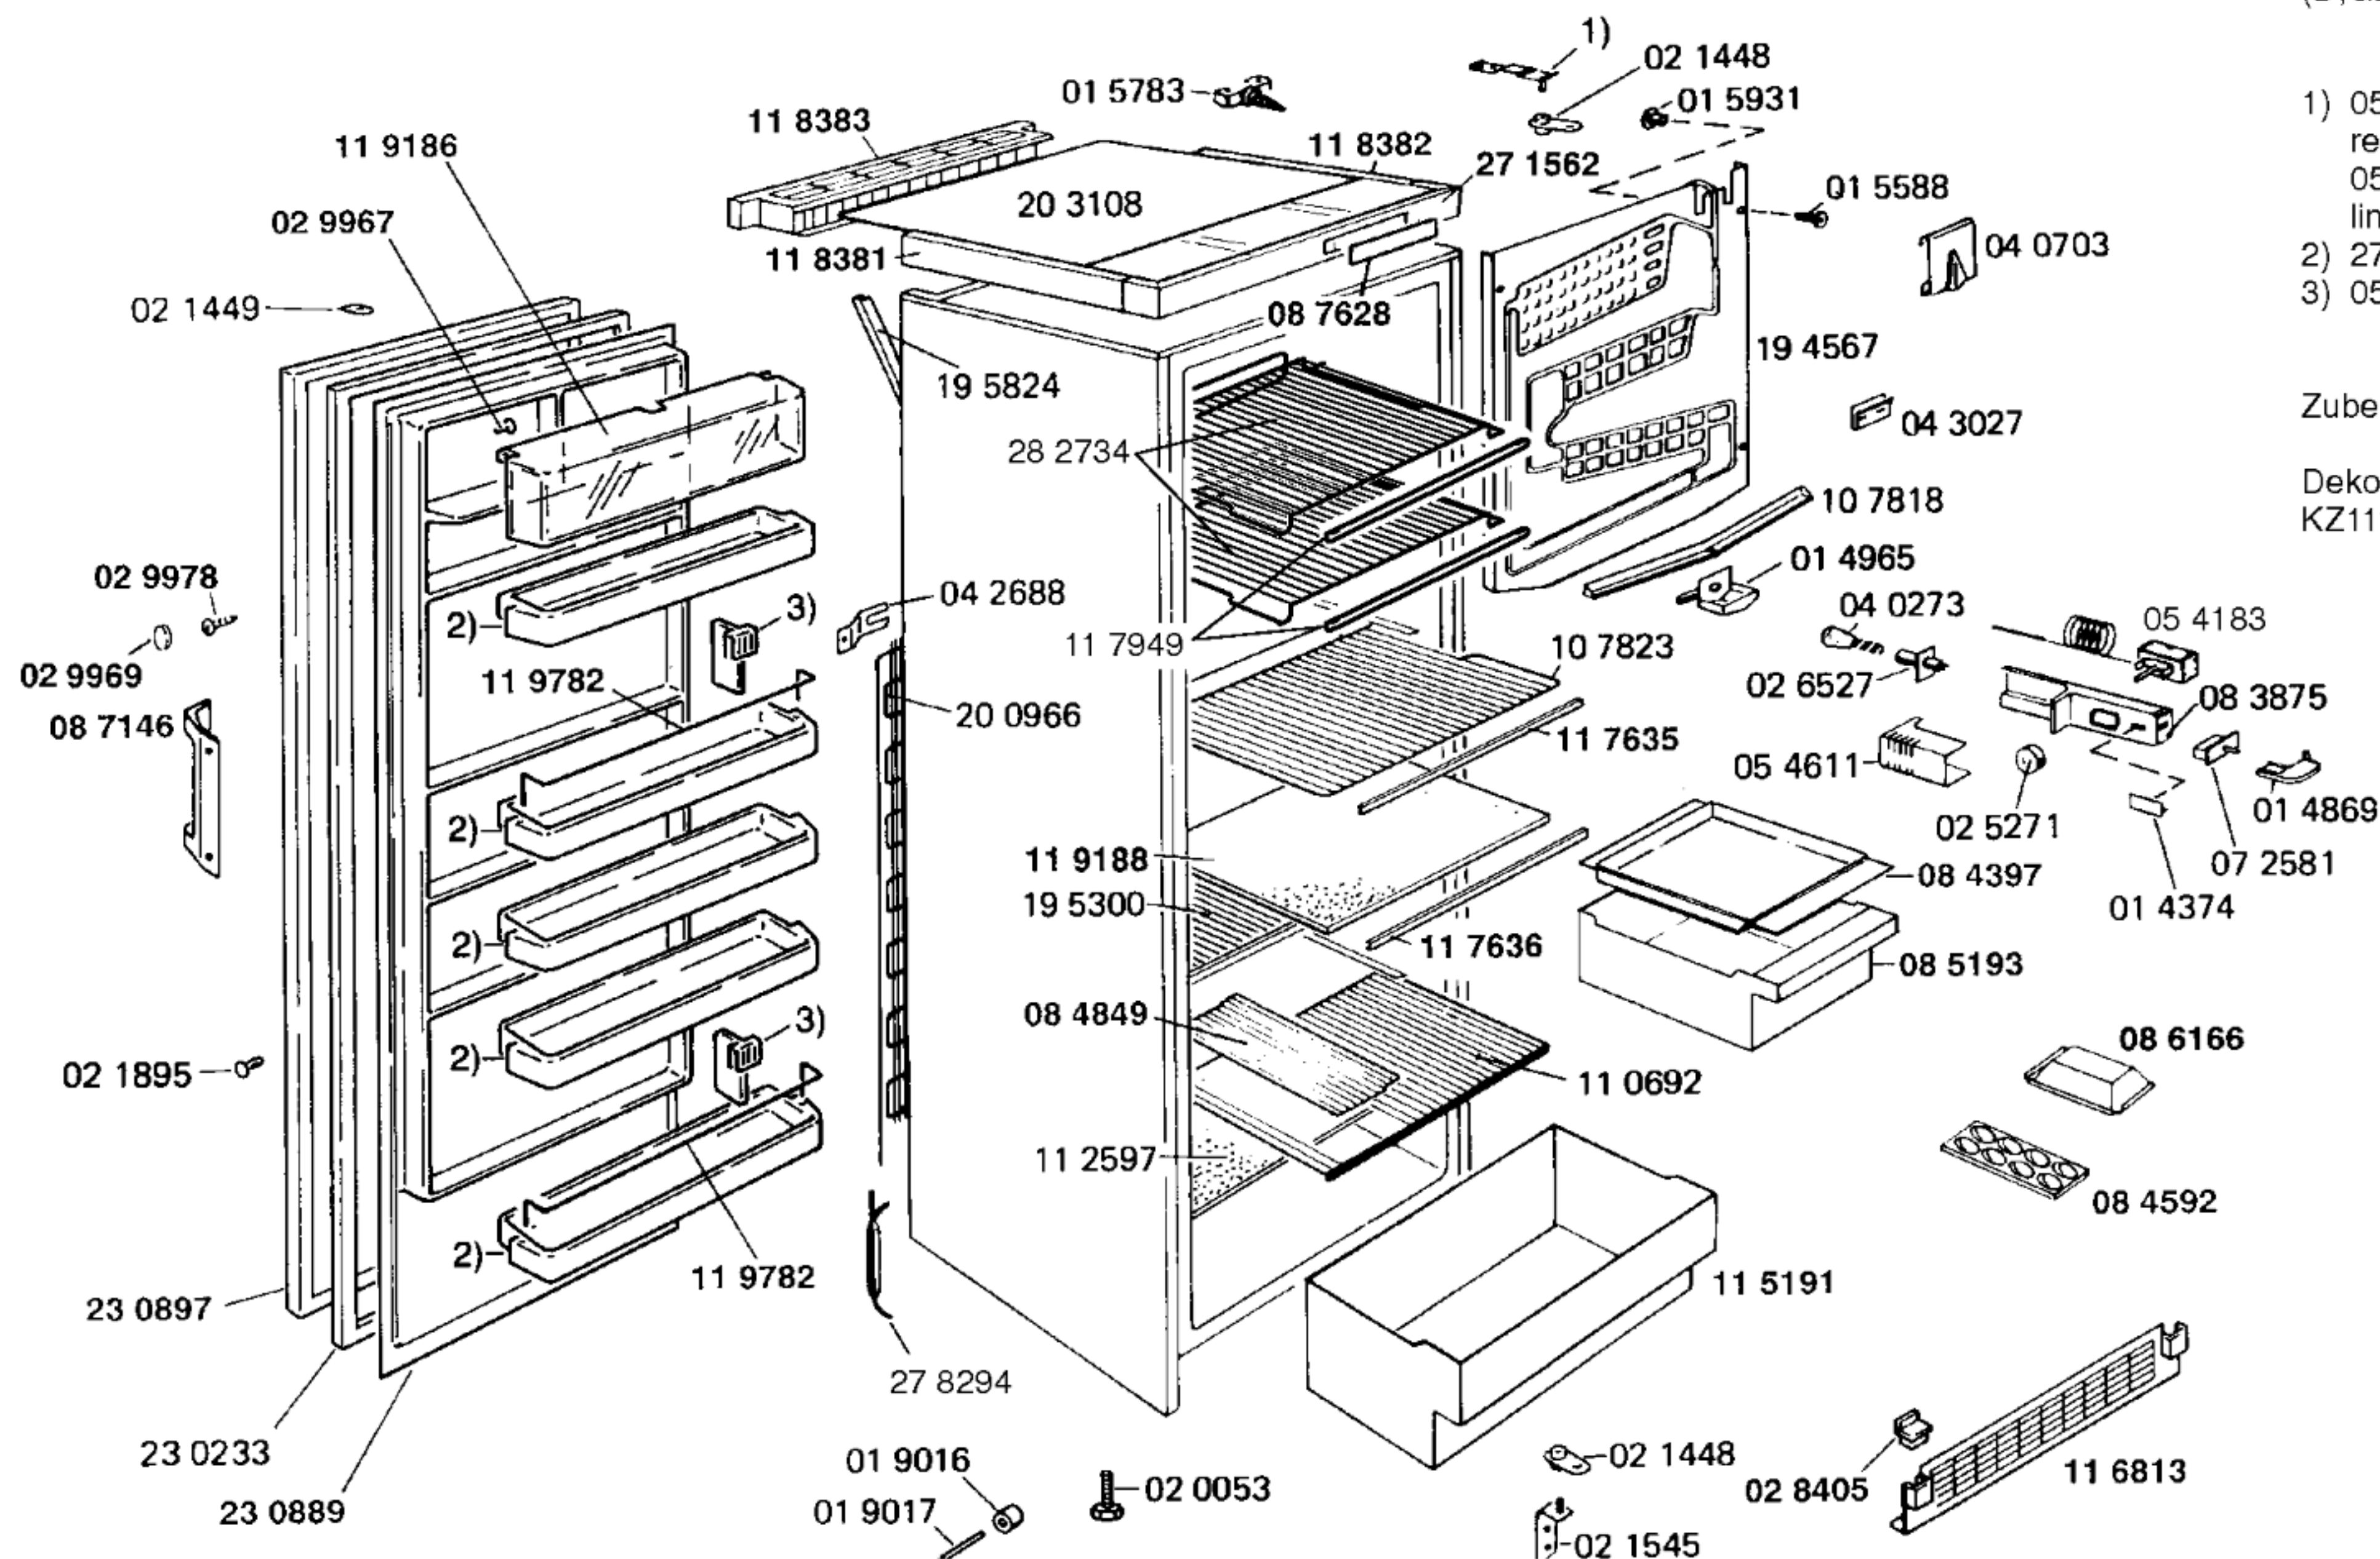

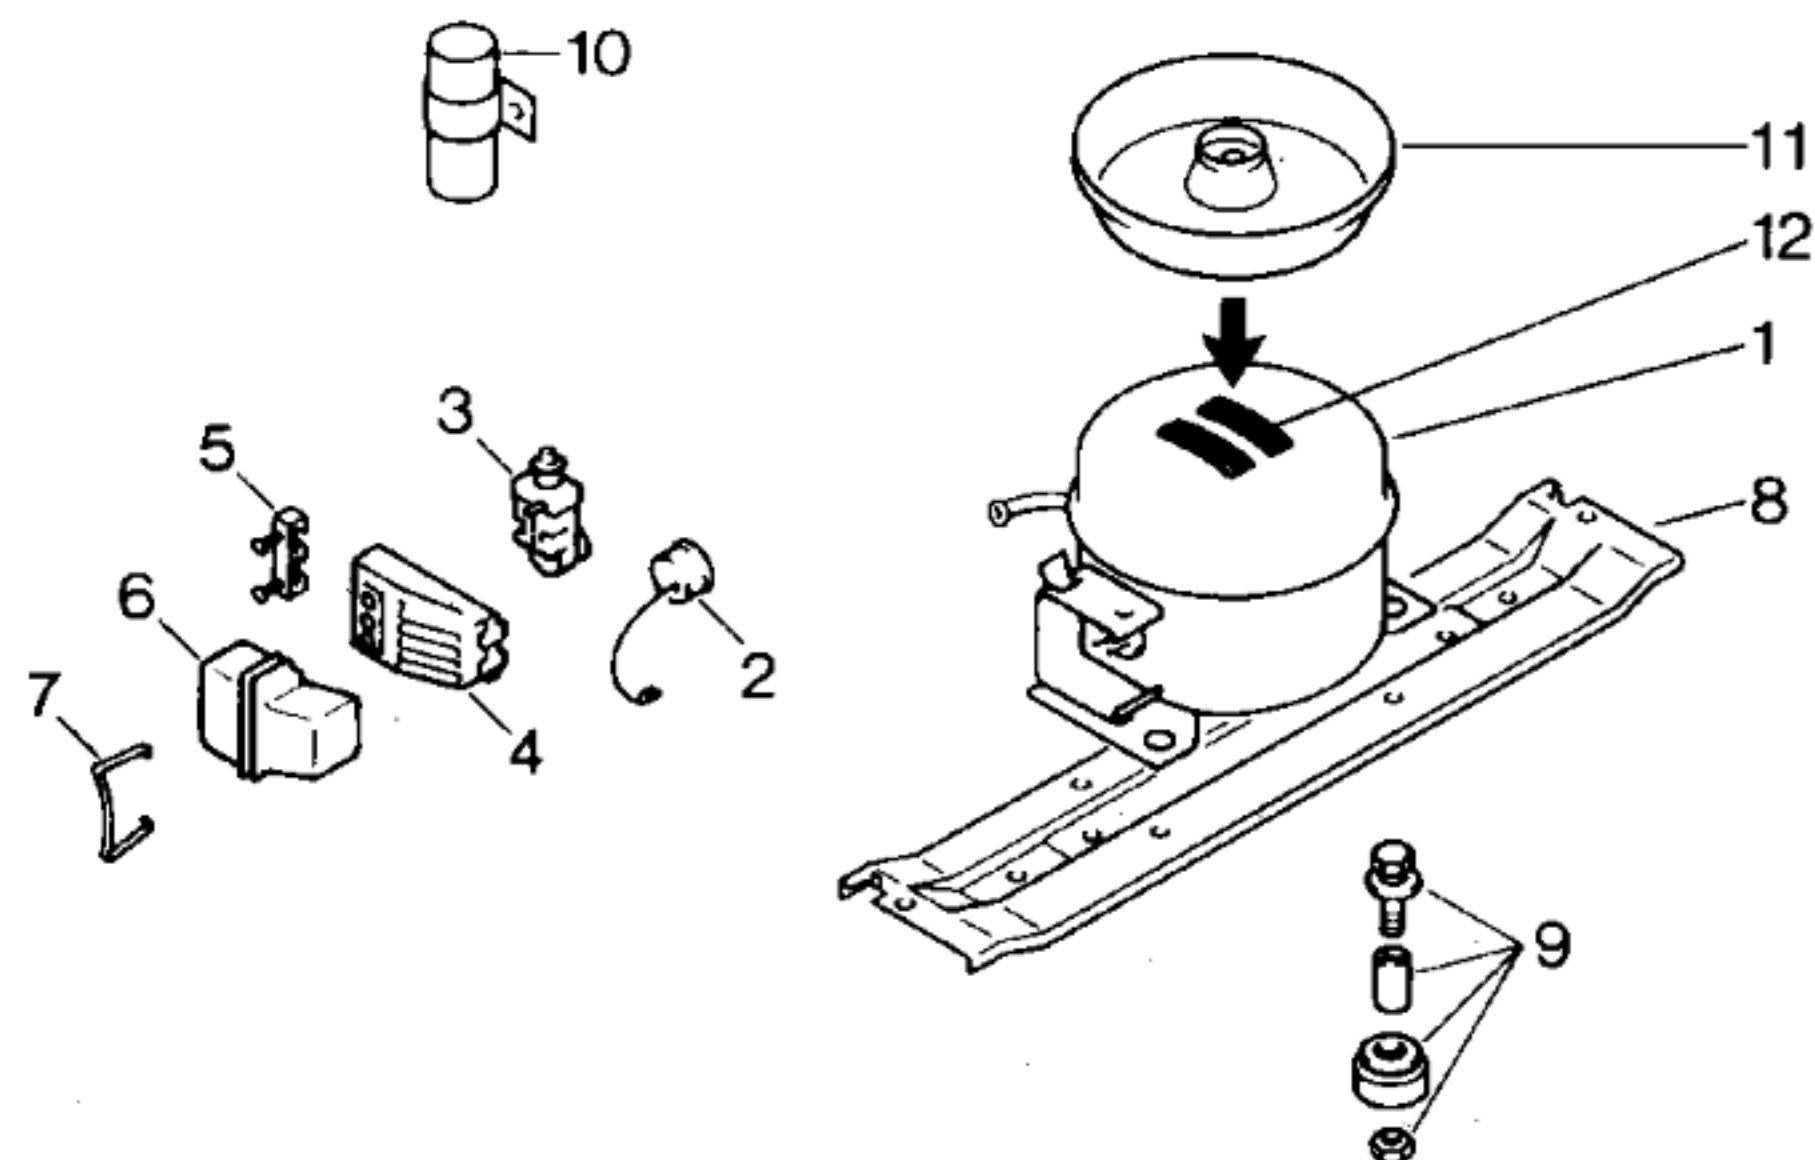

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES			
Verdichter/Compressor/Compresseur		Matsushita	Danfoss
Typ/Type		FN43 Q 67G	TL4A
Förderleistung/Delivery/Débit	l/h	779	695
Anlaufstrom/Starting current/Cour de démarrage	A	5,5	8,3
Widerstand/Resistance/Résistance	Ha/main/prin.	20,2	23,4
	Hi/aux	54,7	15,5
Temp.-Regler/Thermostat		M u. J	
Typ/Type		TF57 FO528	
Reglerstellung/Position		kalt warm	
Schaltwerte/Switching values/	„ein“ °C	+4 +4	
Valeurs de commutation	„aus“	-25 -11	
	(„abtauen“ od.)	„alarm“	
Füllmenge/Fill.quantity/Charge		R12	
	g	90	
Anschlußwert/Conn.load/Puiss. connectée		W	110
Heizung/Heater/Chauffage			
Widerstand/Resistance/Résistance	Ω		
Leistung/Power/Puissance	W		
Ventilator/Blower/Ventilateur			
Widerstand/Resistance/Résistance	Ω		
Schaltuhr/Timer/Minuterie de contact			
Widerstand/Resistance/Résistance	Ω		
Magnetventil/Magnetic valve/Electrovanne			
Widerstand/Resistance/Résistance	Ω		
Spannung/Voltage/Tension	V		

Pos.	V03	
	Matsushita	Danfoss
	FN43 Q 67G	TL 4 A
1	14 0408	13 1064
2		
3	02 7509	02 0108
4		
5		02 7310
6	05 6077	05 1413
7	02 6731	
8	11 1919	11 1919
9	05 0166	05 0166
10		
11	08 5182	08 4744
12	05 6008	05 6008