


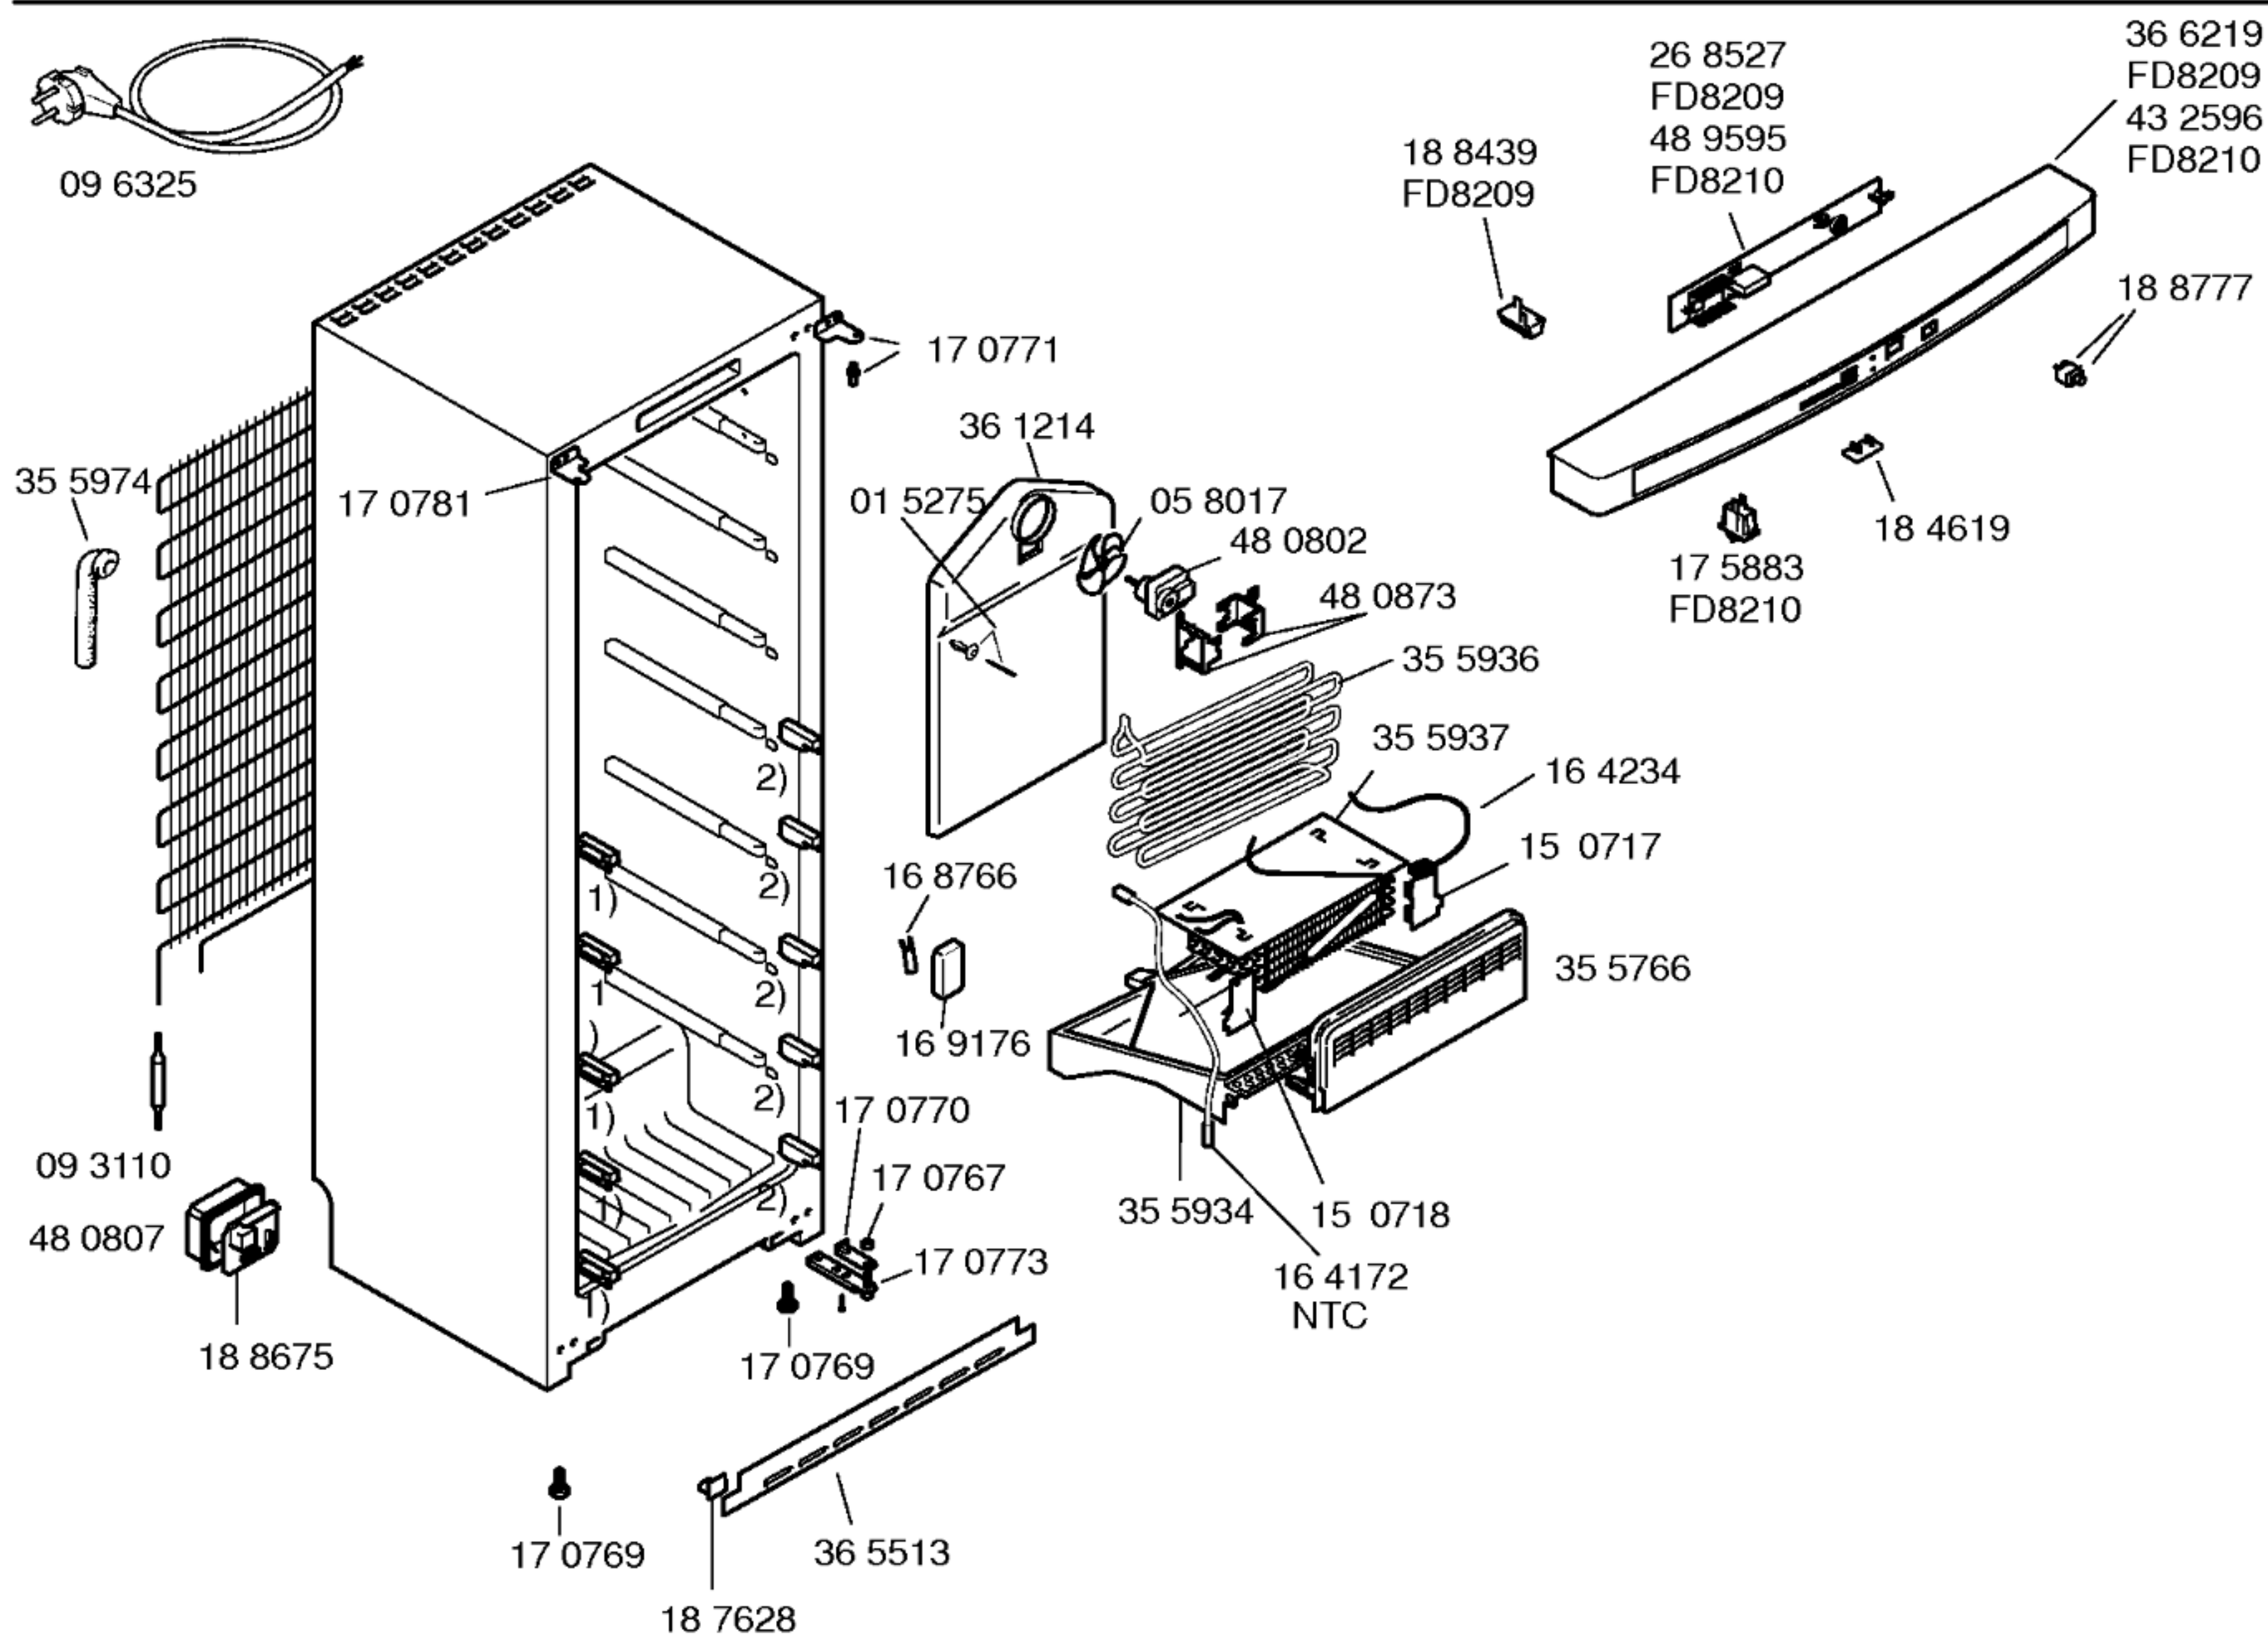




Mat. - Nr. -Konstante
3740


Gebrauchsanweisung
58 0914 FD8209
(D,GB,F,I,NL,E,P)
58 0915 FD8209
(DK,N,SF,S)
58 4987 FD8210
(de,en,fr,it,nl,es,pt,tr)
58 4988 FD8210
(da,no,fi,se)

Montageanleitung
58 0241
(D,GB,F,I,NL,DK,N,
SF,S,E,P,TR,GR)

Beistellsatz
26 5629

1) 17 1455
2) 17 1454

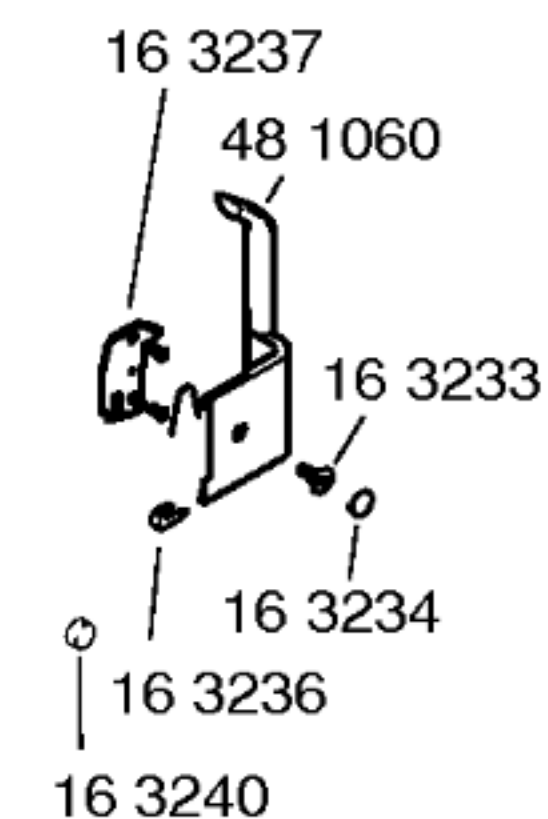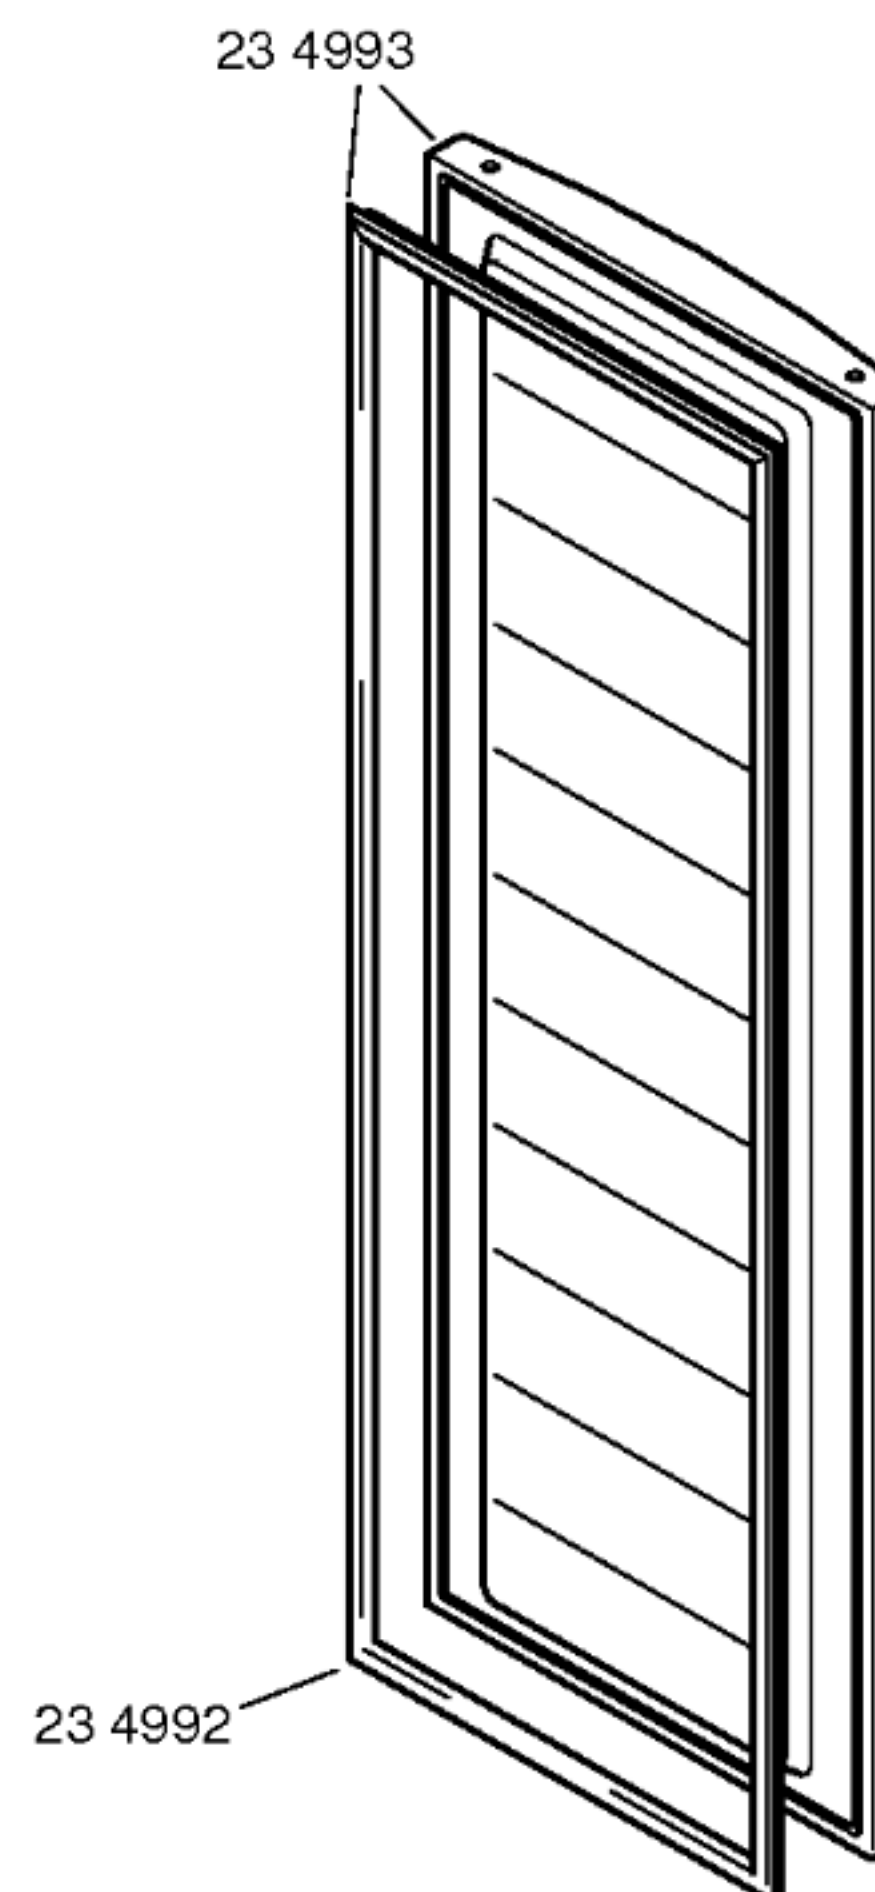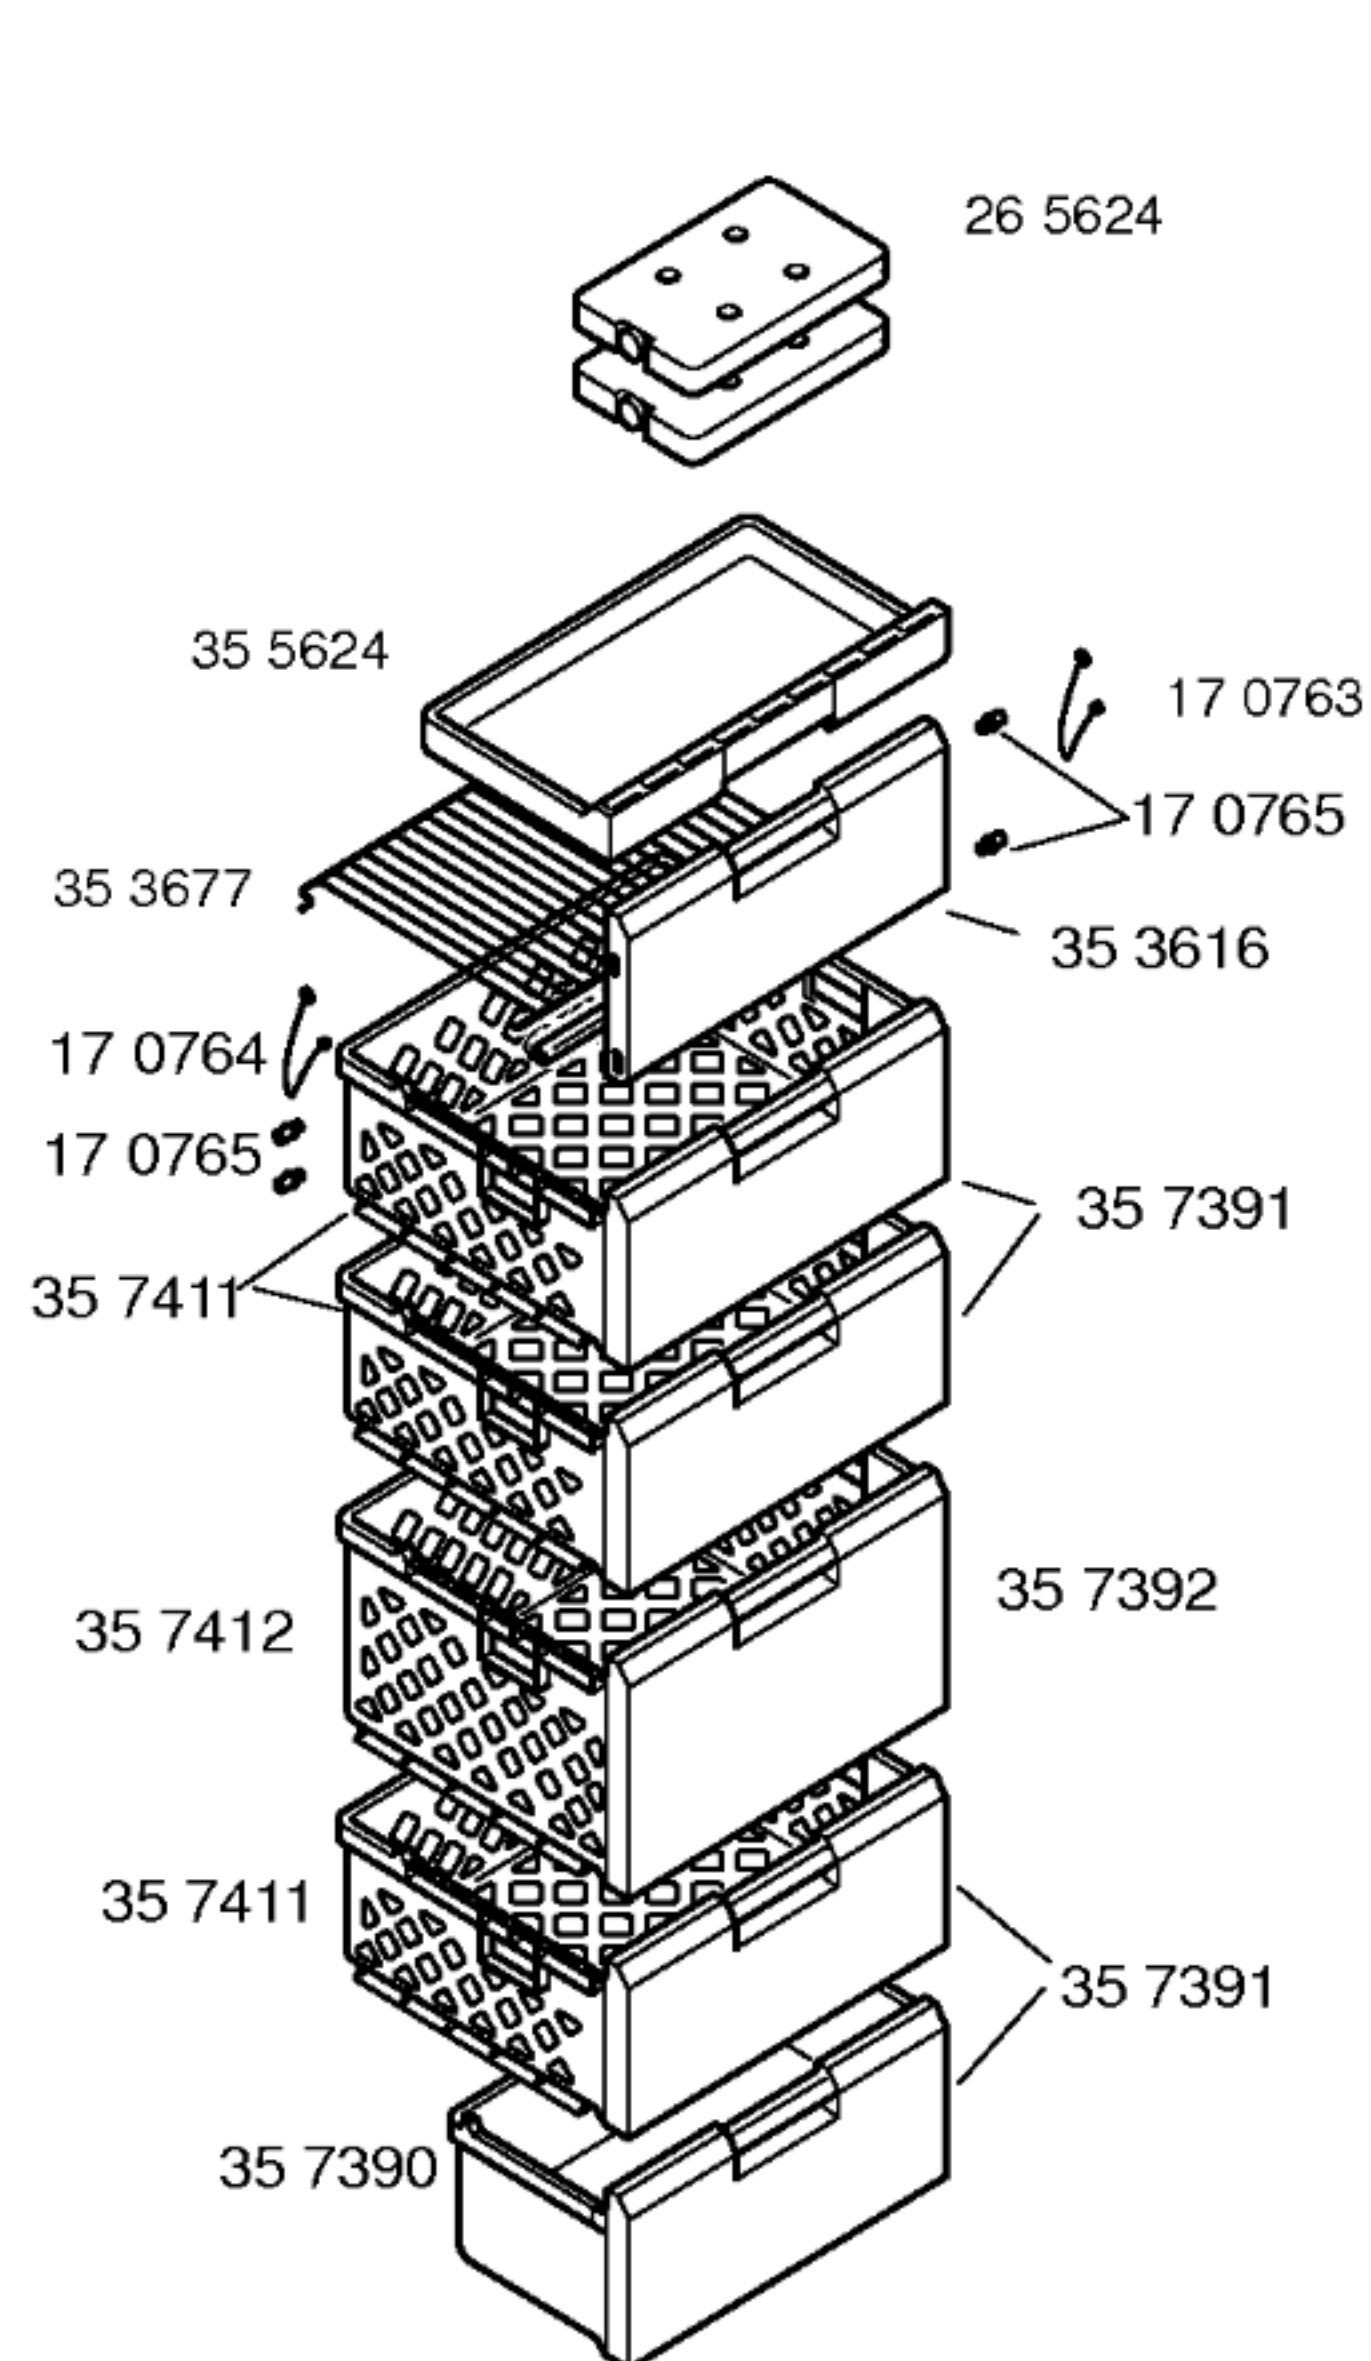

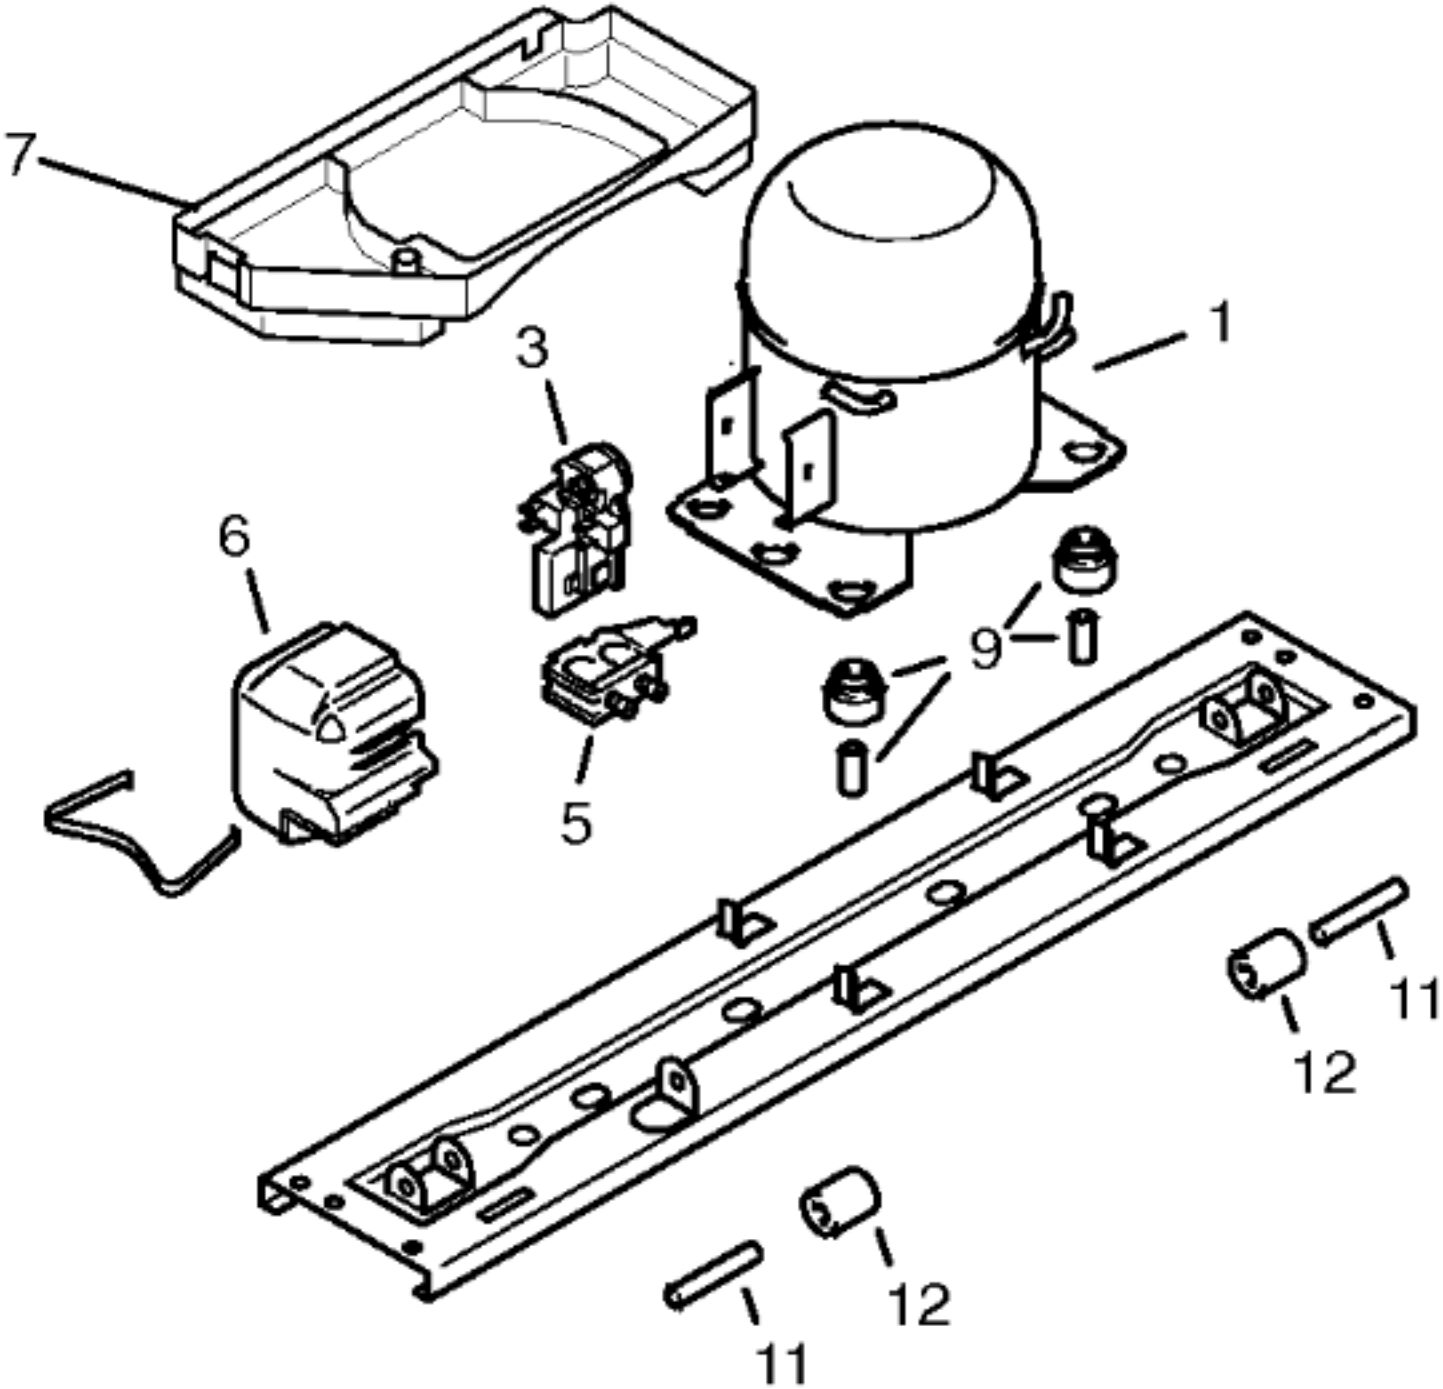

Mat. – Nr. – Konstante
3740

Pos.	V01		
	Matsushita		
	DC125E		
1	14 2131		
2			
3	17 2967		
4			
5	16 2549		
6	16 6782		
7	09 6212		
8			
9	05 0166		
10			
11	01 9017		
12	01 9016		

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES						
Verdichter/Compressor/Compresseur		Matsushita				
Typ/Type		DC125E				
Förderleistung/Delivery/Débit		2246				
Anlaufstrom/Starting current/Cour de démarrageA		9,2				
Widerstand/Resistance/Résistance Ha/main/prinΩ		12,1				
Hi/aux		Ω		13,8		
Temp.–Regler/Thermostat		Elektronisch				
Typ/Type		EIN AUS				
Regelstellung/Position		–15 –16				
Schaltwerte/Switching values "warm"		–19 –20				
Valeurs de commutation "kalt"		–23 –24				
		–9 –14				
Füllmenge/Fill.quantity/Charge R600a		*				
Anschlußwert/Conn.load/Puiss. connectée		W		120		
Heizung/Heater/Chauffage		Abtauheizung		Rinnenheizung		
Widerstand/Resistance/Résistance		Ω		240		
Leistung/Power/Puissance		W		24		
Ventilator/Blower/Ventilateur		560				
Widerstand/Resistance/Résistance		Ω				
Raumtemperaturfühler 2%		C K		C k		
		+10 9,9		–18 43,3		
		+ 5 12,7		–22 54,6		
		+ 0 16,3		–26 69,4		
Widerstand NTC–Fühler 1%		°C kΩ		°C kΩ °C kΩ		
		–1 17,3		–15 36,5 –20 48,6		
		–9 26,2		–16 38,8 –23 58,1		
		–14 34,5		–19 45,9 –24 61,6		
Magnetventil/Magnetic valve/Electrovanne		Ω				
Widerstand/Resistance/Résistance		Ω				
Spannung/Voltage/Tension		V				

* siehe Typenschild