



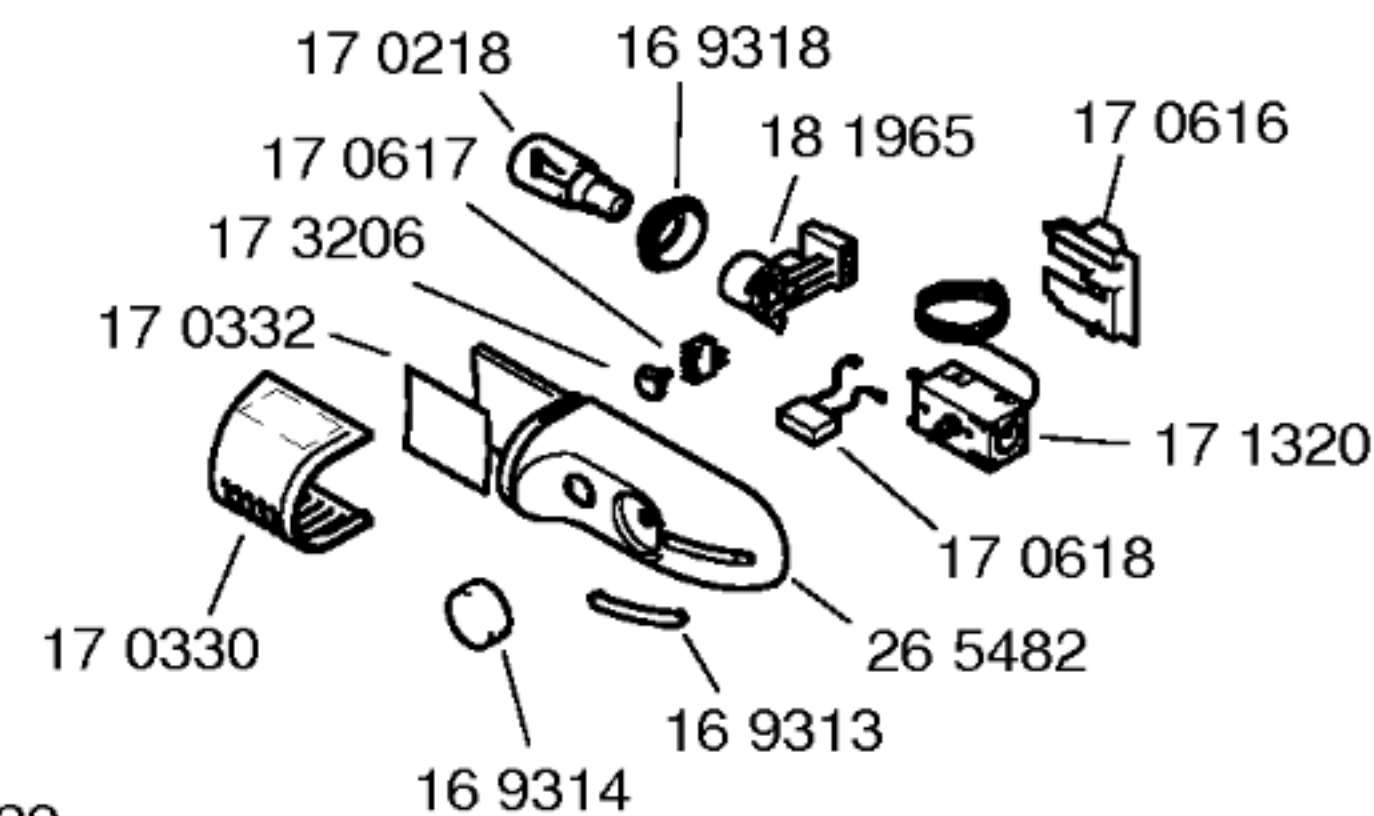

07 4445

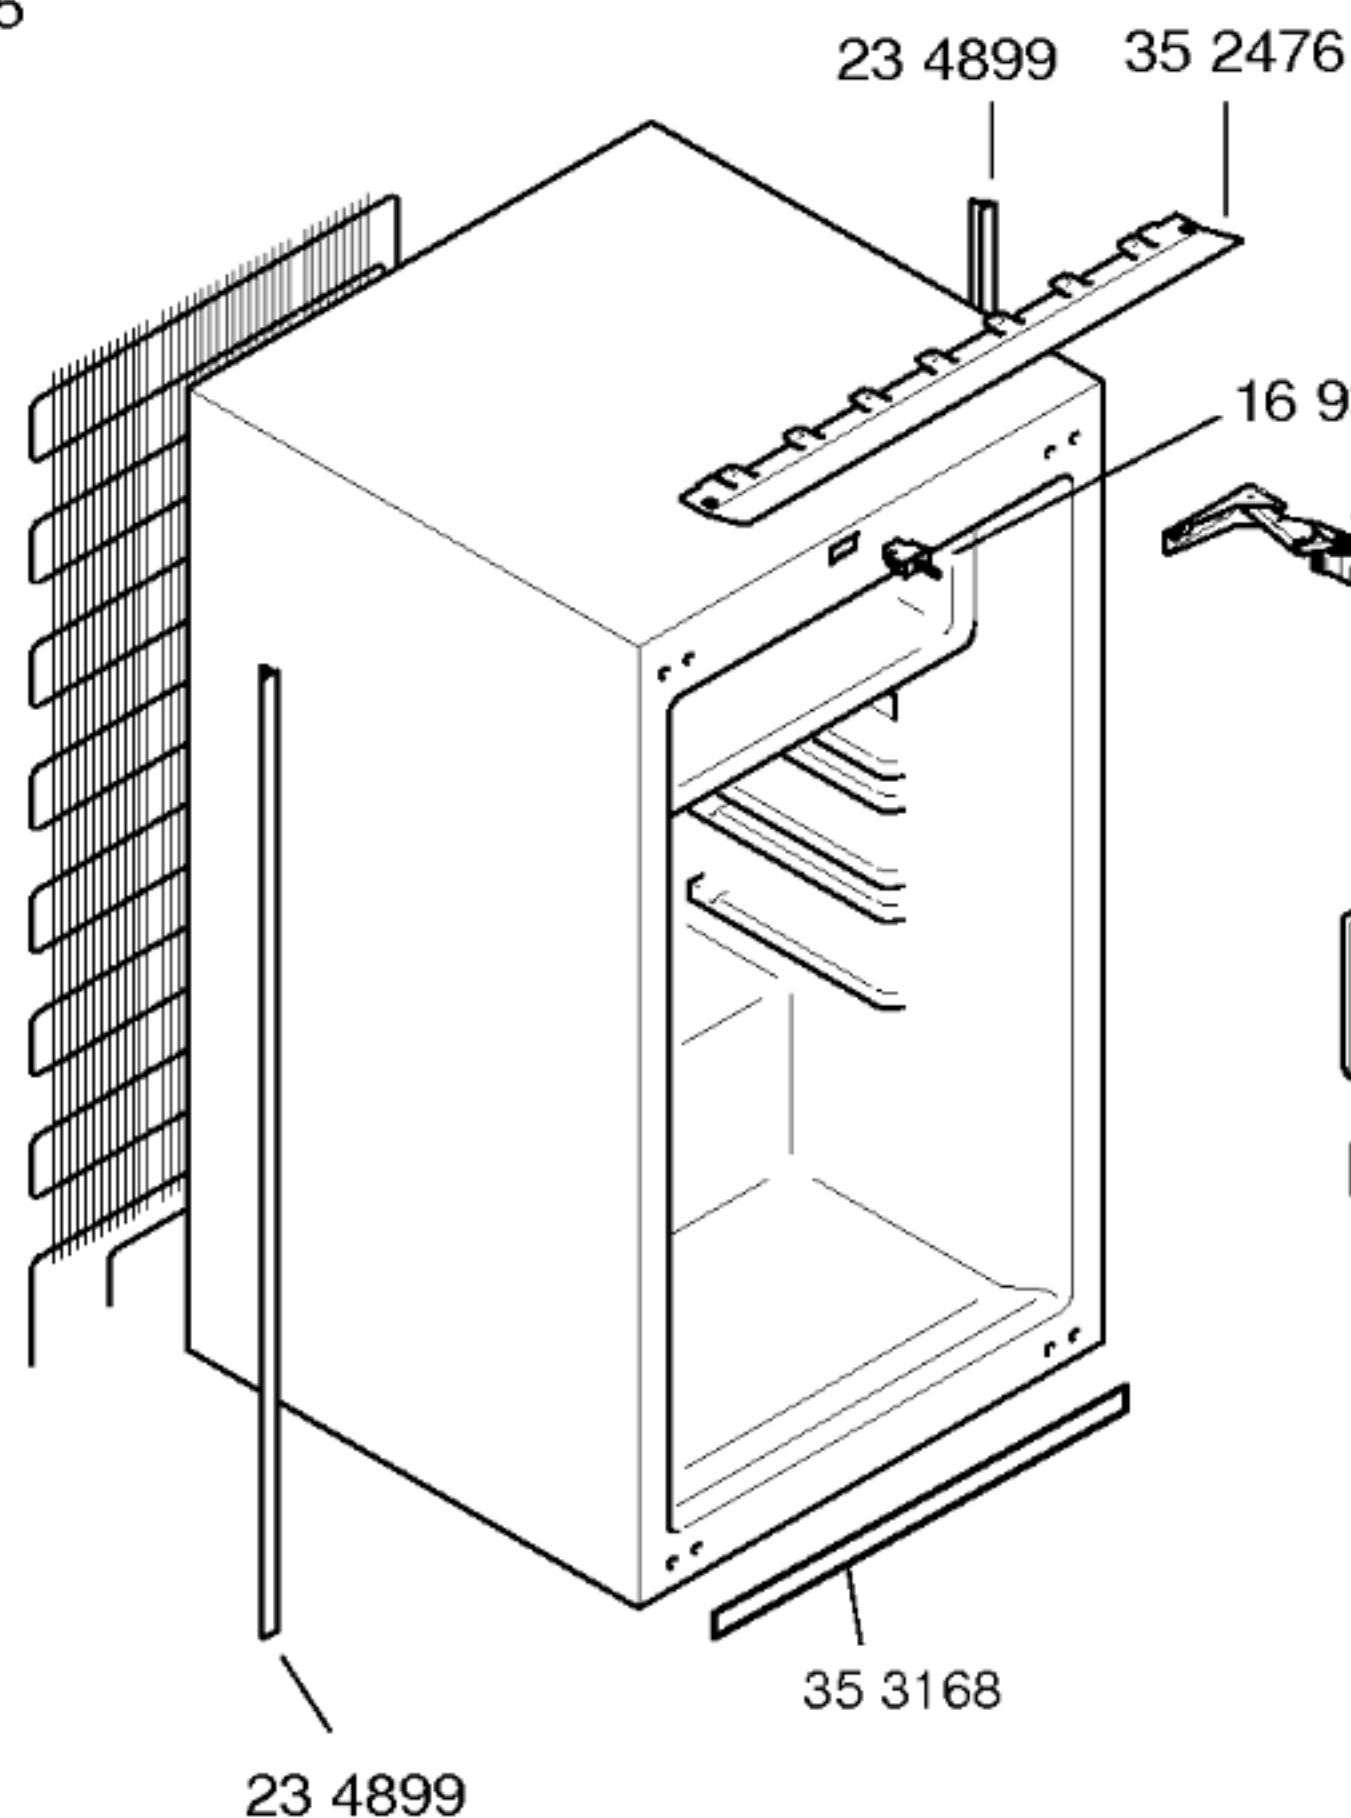

Gebrauchsanweisung  
52 7635  
(D,GB,F,I,NL)  
52 7636  
(I,E,P,GR)


Montageanleitung  
52 2494  
(D,GB,F,I,NL,DK,N,SF,  
SE,TR)

Beistellsatz  
26 5162


09 3110



06 5644

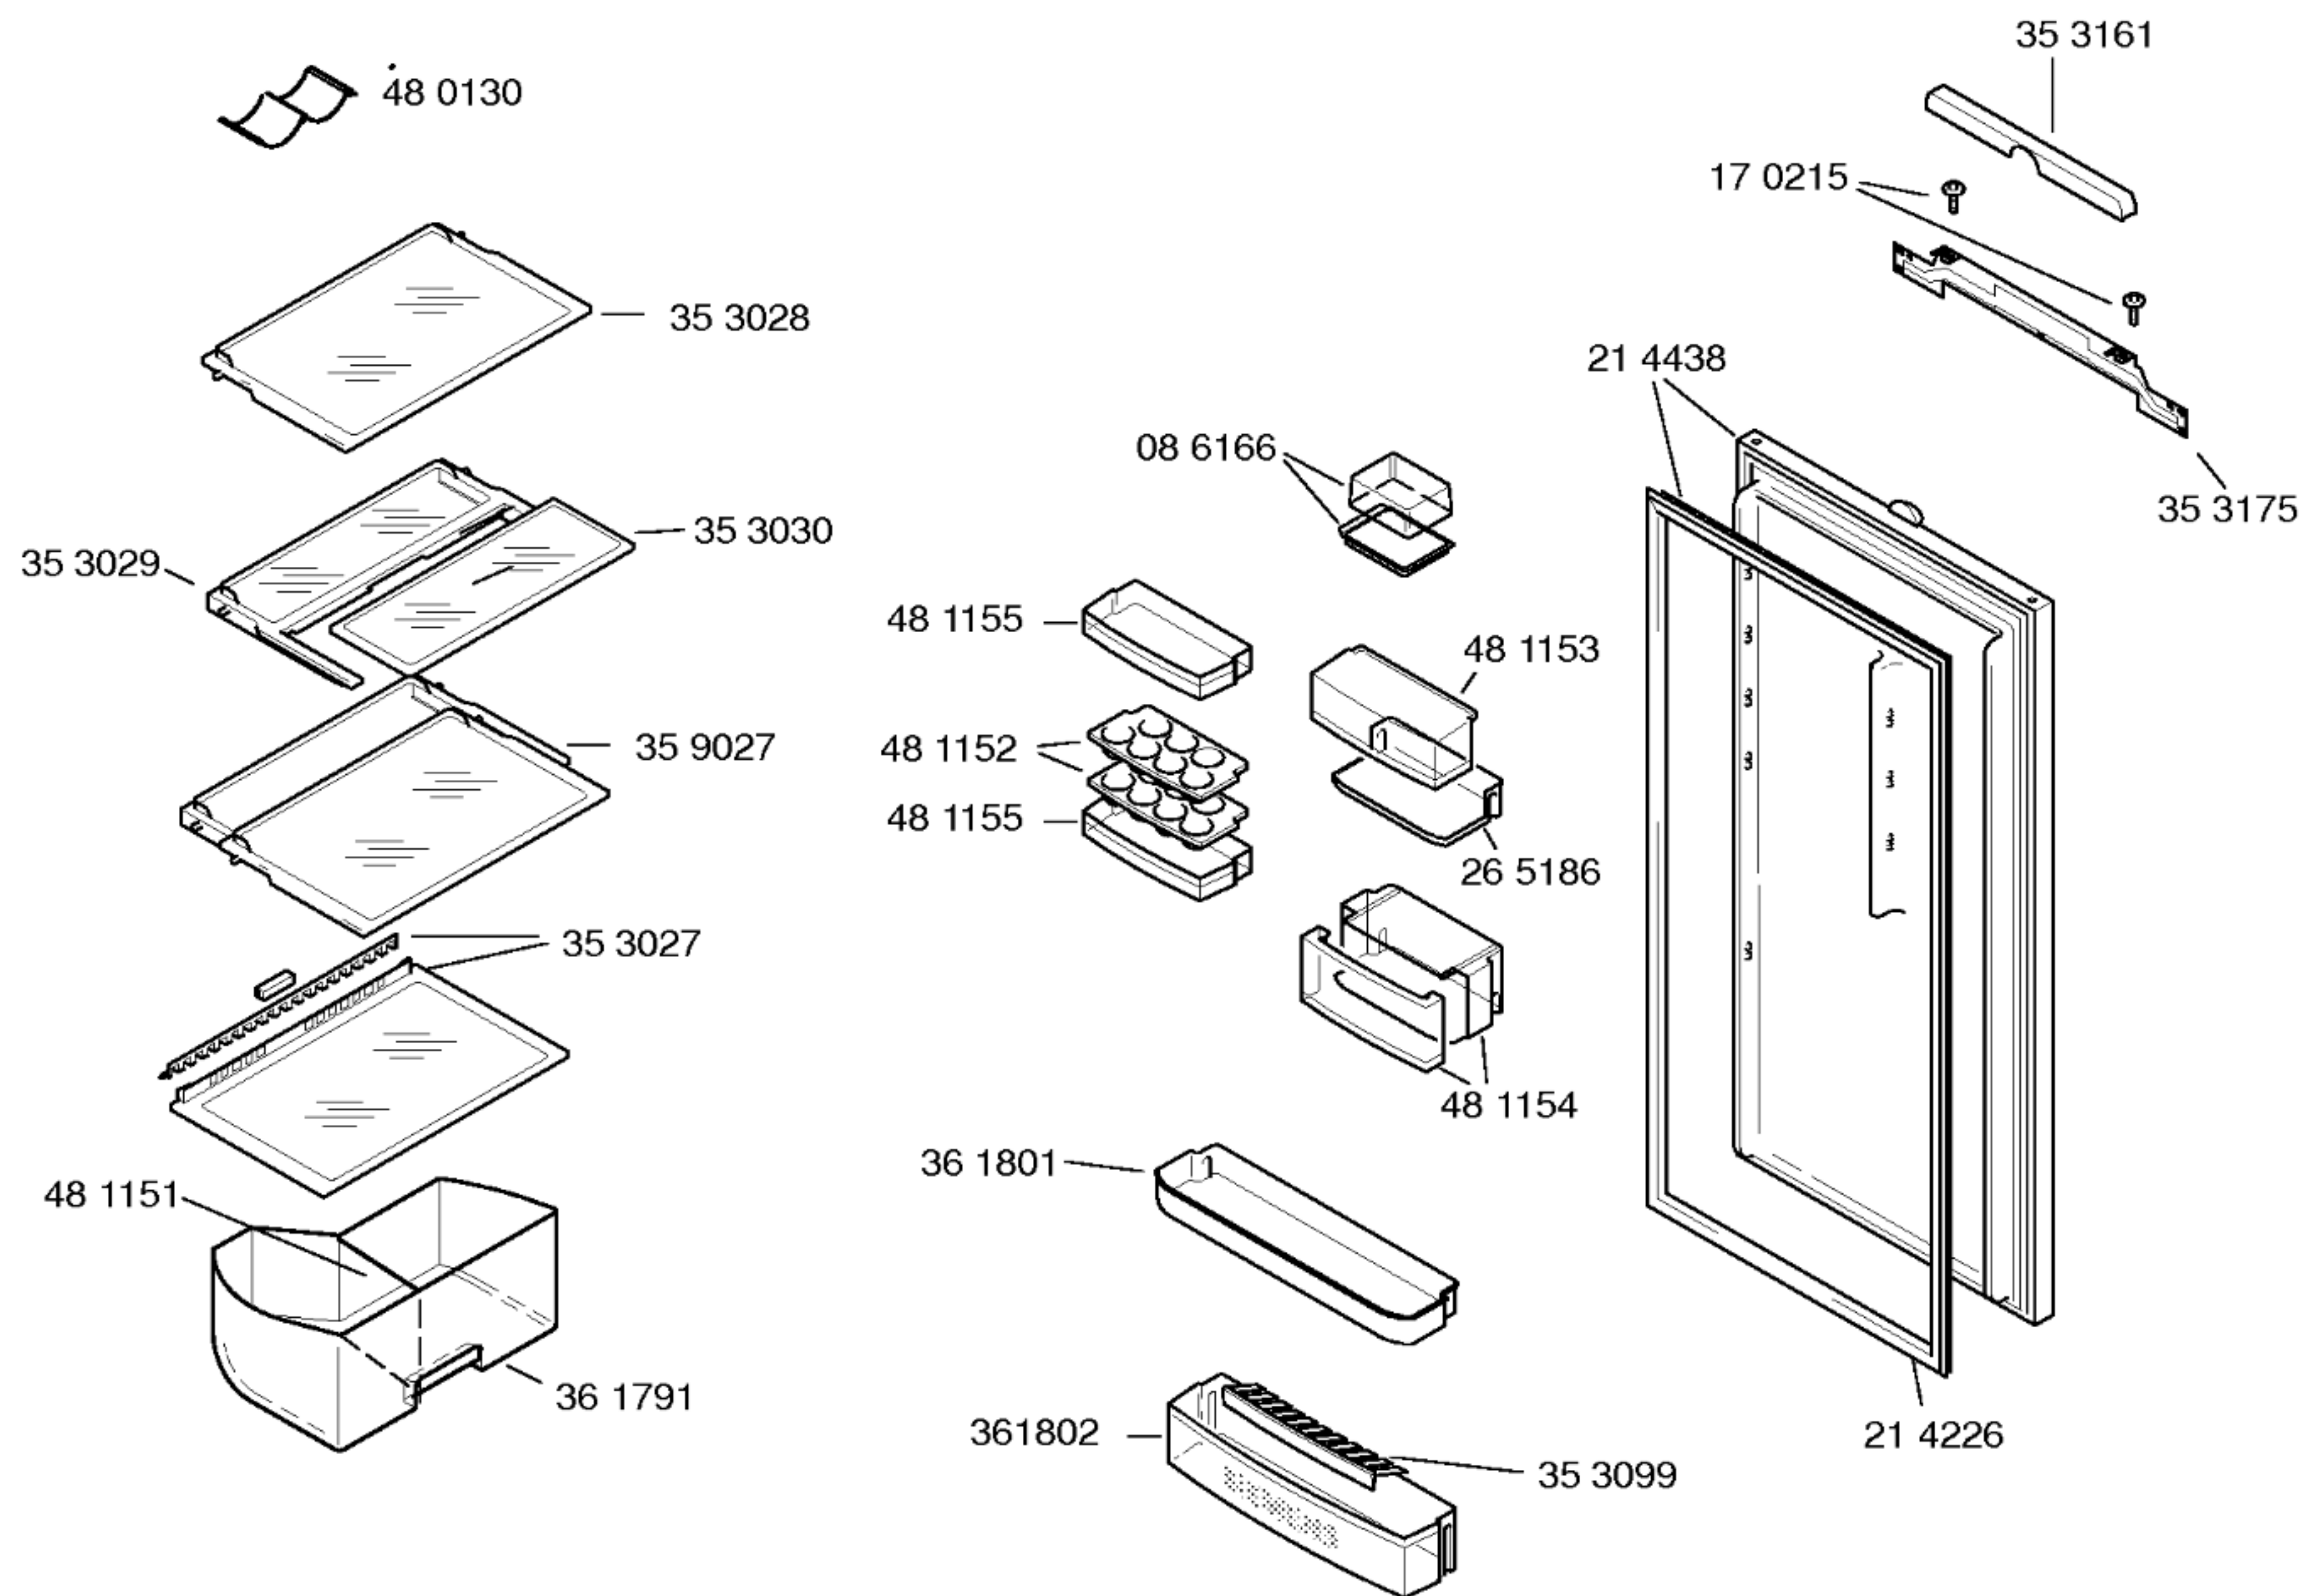



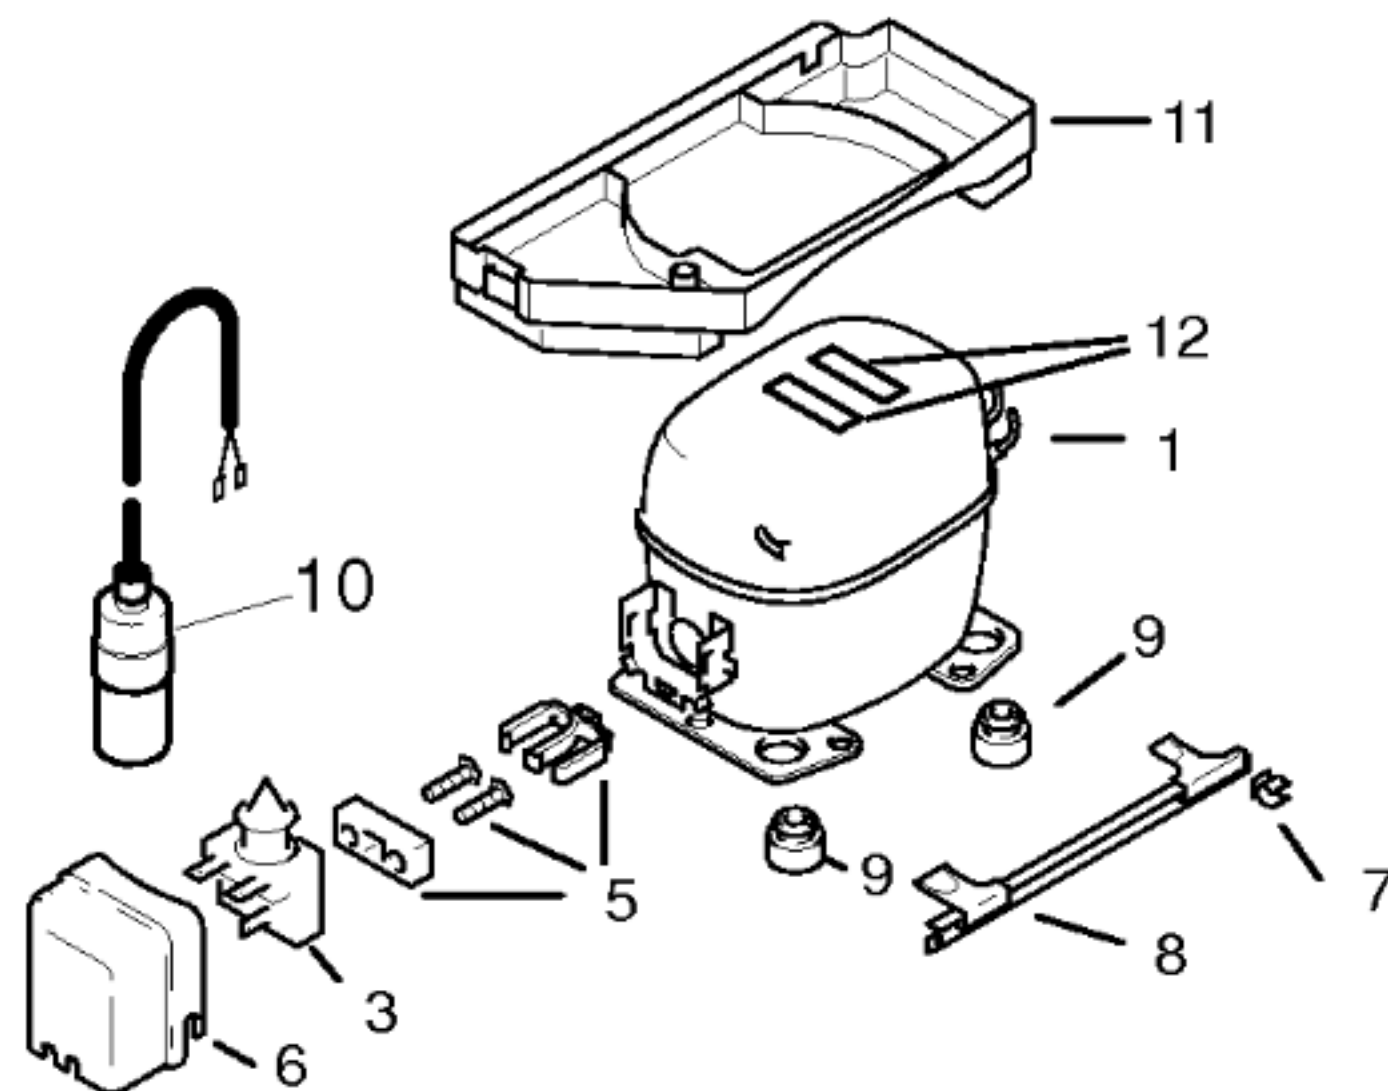

|      | V01     | V02       |  |
|------|---------|-----------|--|
| Pos. | Danfoss | Aspera    |  |
|      | TLY 6K  | BPK 1084Y |  |
| 1    | 14 1680 | 14 2101   |  |
| 2    |         |           |  |
| 3    | 15 1055 | 18 0819   |  |
| 4    |         |           |  |
| 5    | 15 0760 | 17 0882   |  |
| 6    | 15 1072 | 17 0881   |  |
| 7    |         | 16 9319   |  |
| 8    | 26 4879 | 26 4879   |  |
| 9    | 05 0166 | 05 0166   |  |
| 10   | 16 5852 |           |  |
| 11   | 35 4549 | 36 5099   |  |
| 12   | 05 6008 | 05 6008   |  |

| TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES |              |         |       |           |
|--------------------------------------------------------|--------------|---------|-------|-----------|
| Verdichter/Compressor/Compresseur                      |              | Danfoss |       | Aspera    |
| Typ/Type                                               |              | TLY 6K  |       | BPK 1084Y |
| Förderleistung/Delivery/Débit                          | l/h          | 1026    |       | 1201      |
| Anlaufstrom/Starting current/Cour de démarrage         | A            | 4,4     |       | 3,6       |
| Widerstand/Resistance/Résistance                       | Ha/main/prin | Ω 34,0  |       | 29,6      |
|                                                        | Hi/aux       | Ω 41,0  |       | 39,1      |
| Temp.-Regler/Thermostat                                |              | Ranco   |       |           |
| Typ/Type                                               |              | K59     |       |           |
| Regelstellung/Position                                 |              | kalt    | warm  |           |
| Schaltwerte/Switching values                           | "warm"       | +4,0    | +4,0  |           |
| Valeurs de commutation                                 | "kalt"       | -32,0   | -12,0 |           |
|                                                        | "alarm"      |         |       |           |
| Füllmenge/Fill.quantity/Charge                         |              | R600a   | *     |           |
| Anschlußwert/Conn.load/Puiss. connectée                |              | W       | 68    | 79        |
| Heizung/Heater/Chauffage                               |              |         |       |           |
| Widerstand/Resistance/Résistance                       | Ω            |         |       |           |
| Leistung/Power/Puissance                               | W            |         |       |           |
| Ventilator/Blower/Ventilateur                          |              |         |       |           |
| Widerstand/Resistance/Résistance                       | Ω            |         |       |           |
| Temp.-Regler/Thermostat                                |              |         |       |           |
| Magnetventil/Magnetic valve/Electrovanne               |              |         |       |           |
| Widerstand/Resistance/Résistance                       | Ω            |         |       |           |
| Spannung/Voltage/Tension                               | V            |         |       |           |

\* siehe Typenschild