


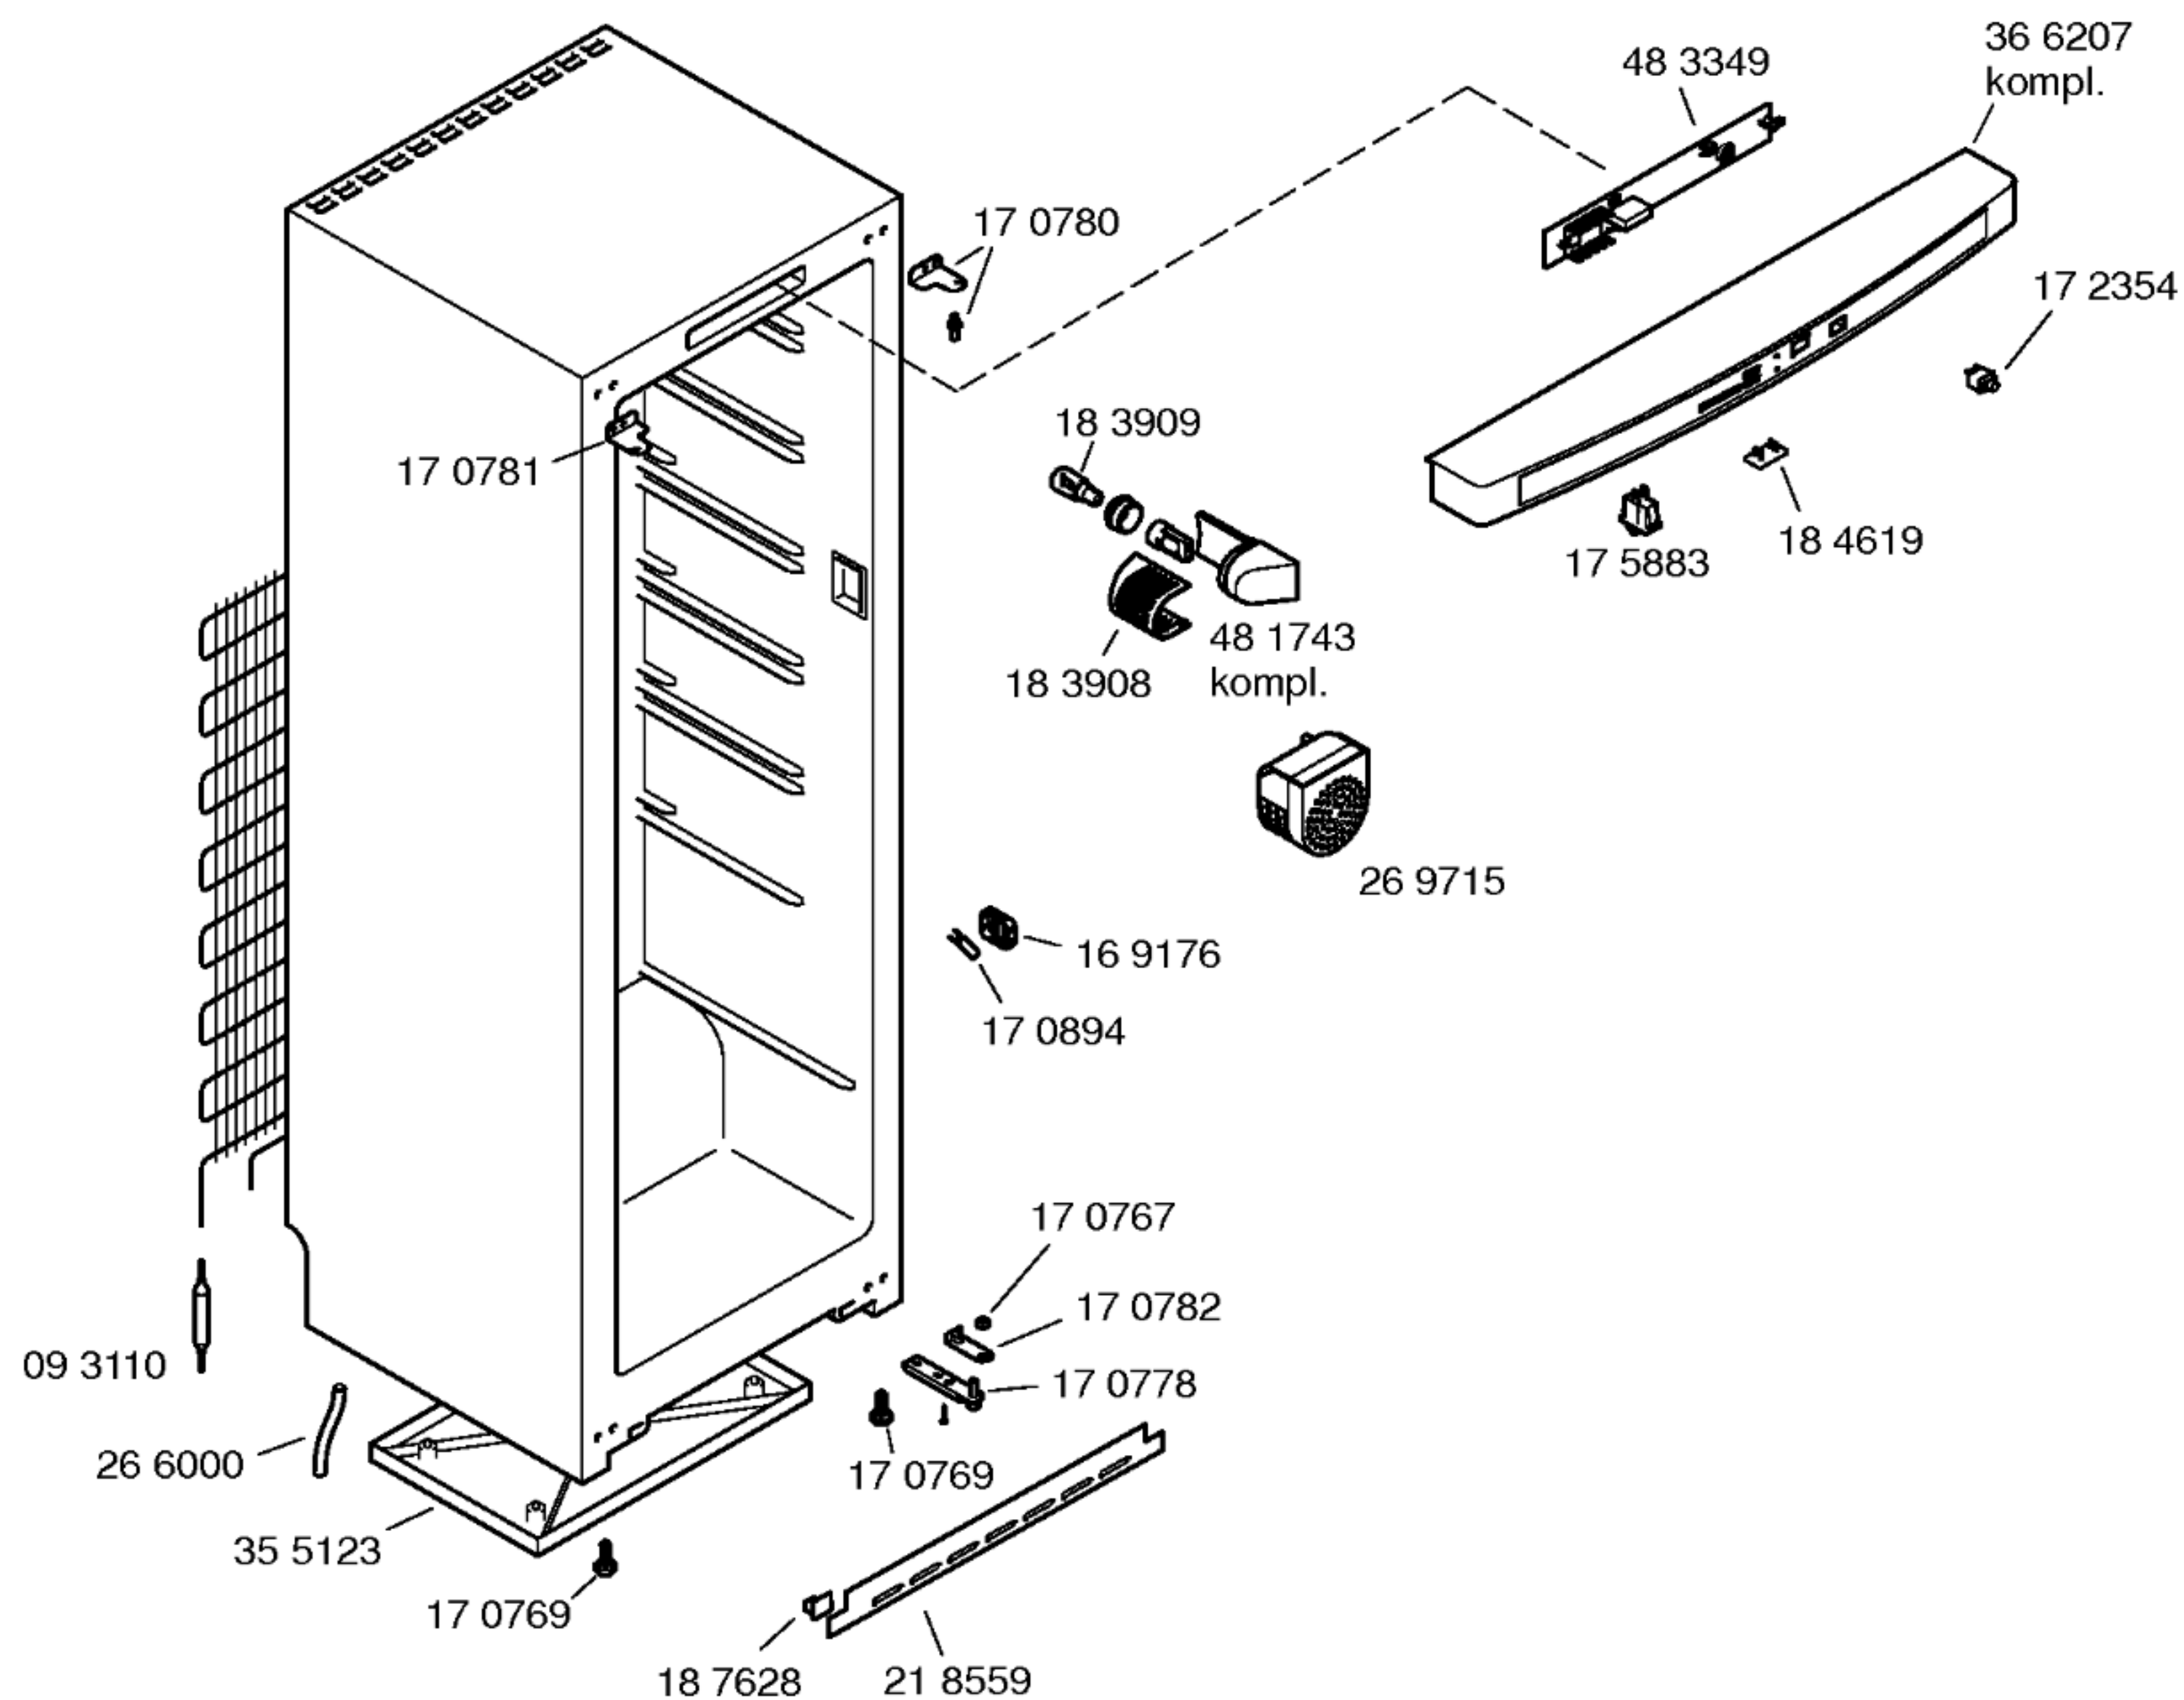


Gebrauchsanweisung  
58 0707  
(D,GB,F,I,NL,N,SF,S,  
E,P,GR,TR)

Montageanleitung  
58 0241


Beistellsatz  
26 5627

Side by Side  
Beistellsatz zu GS  
48 1044

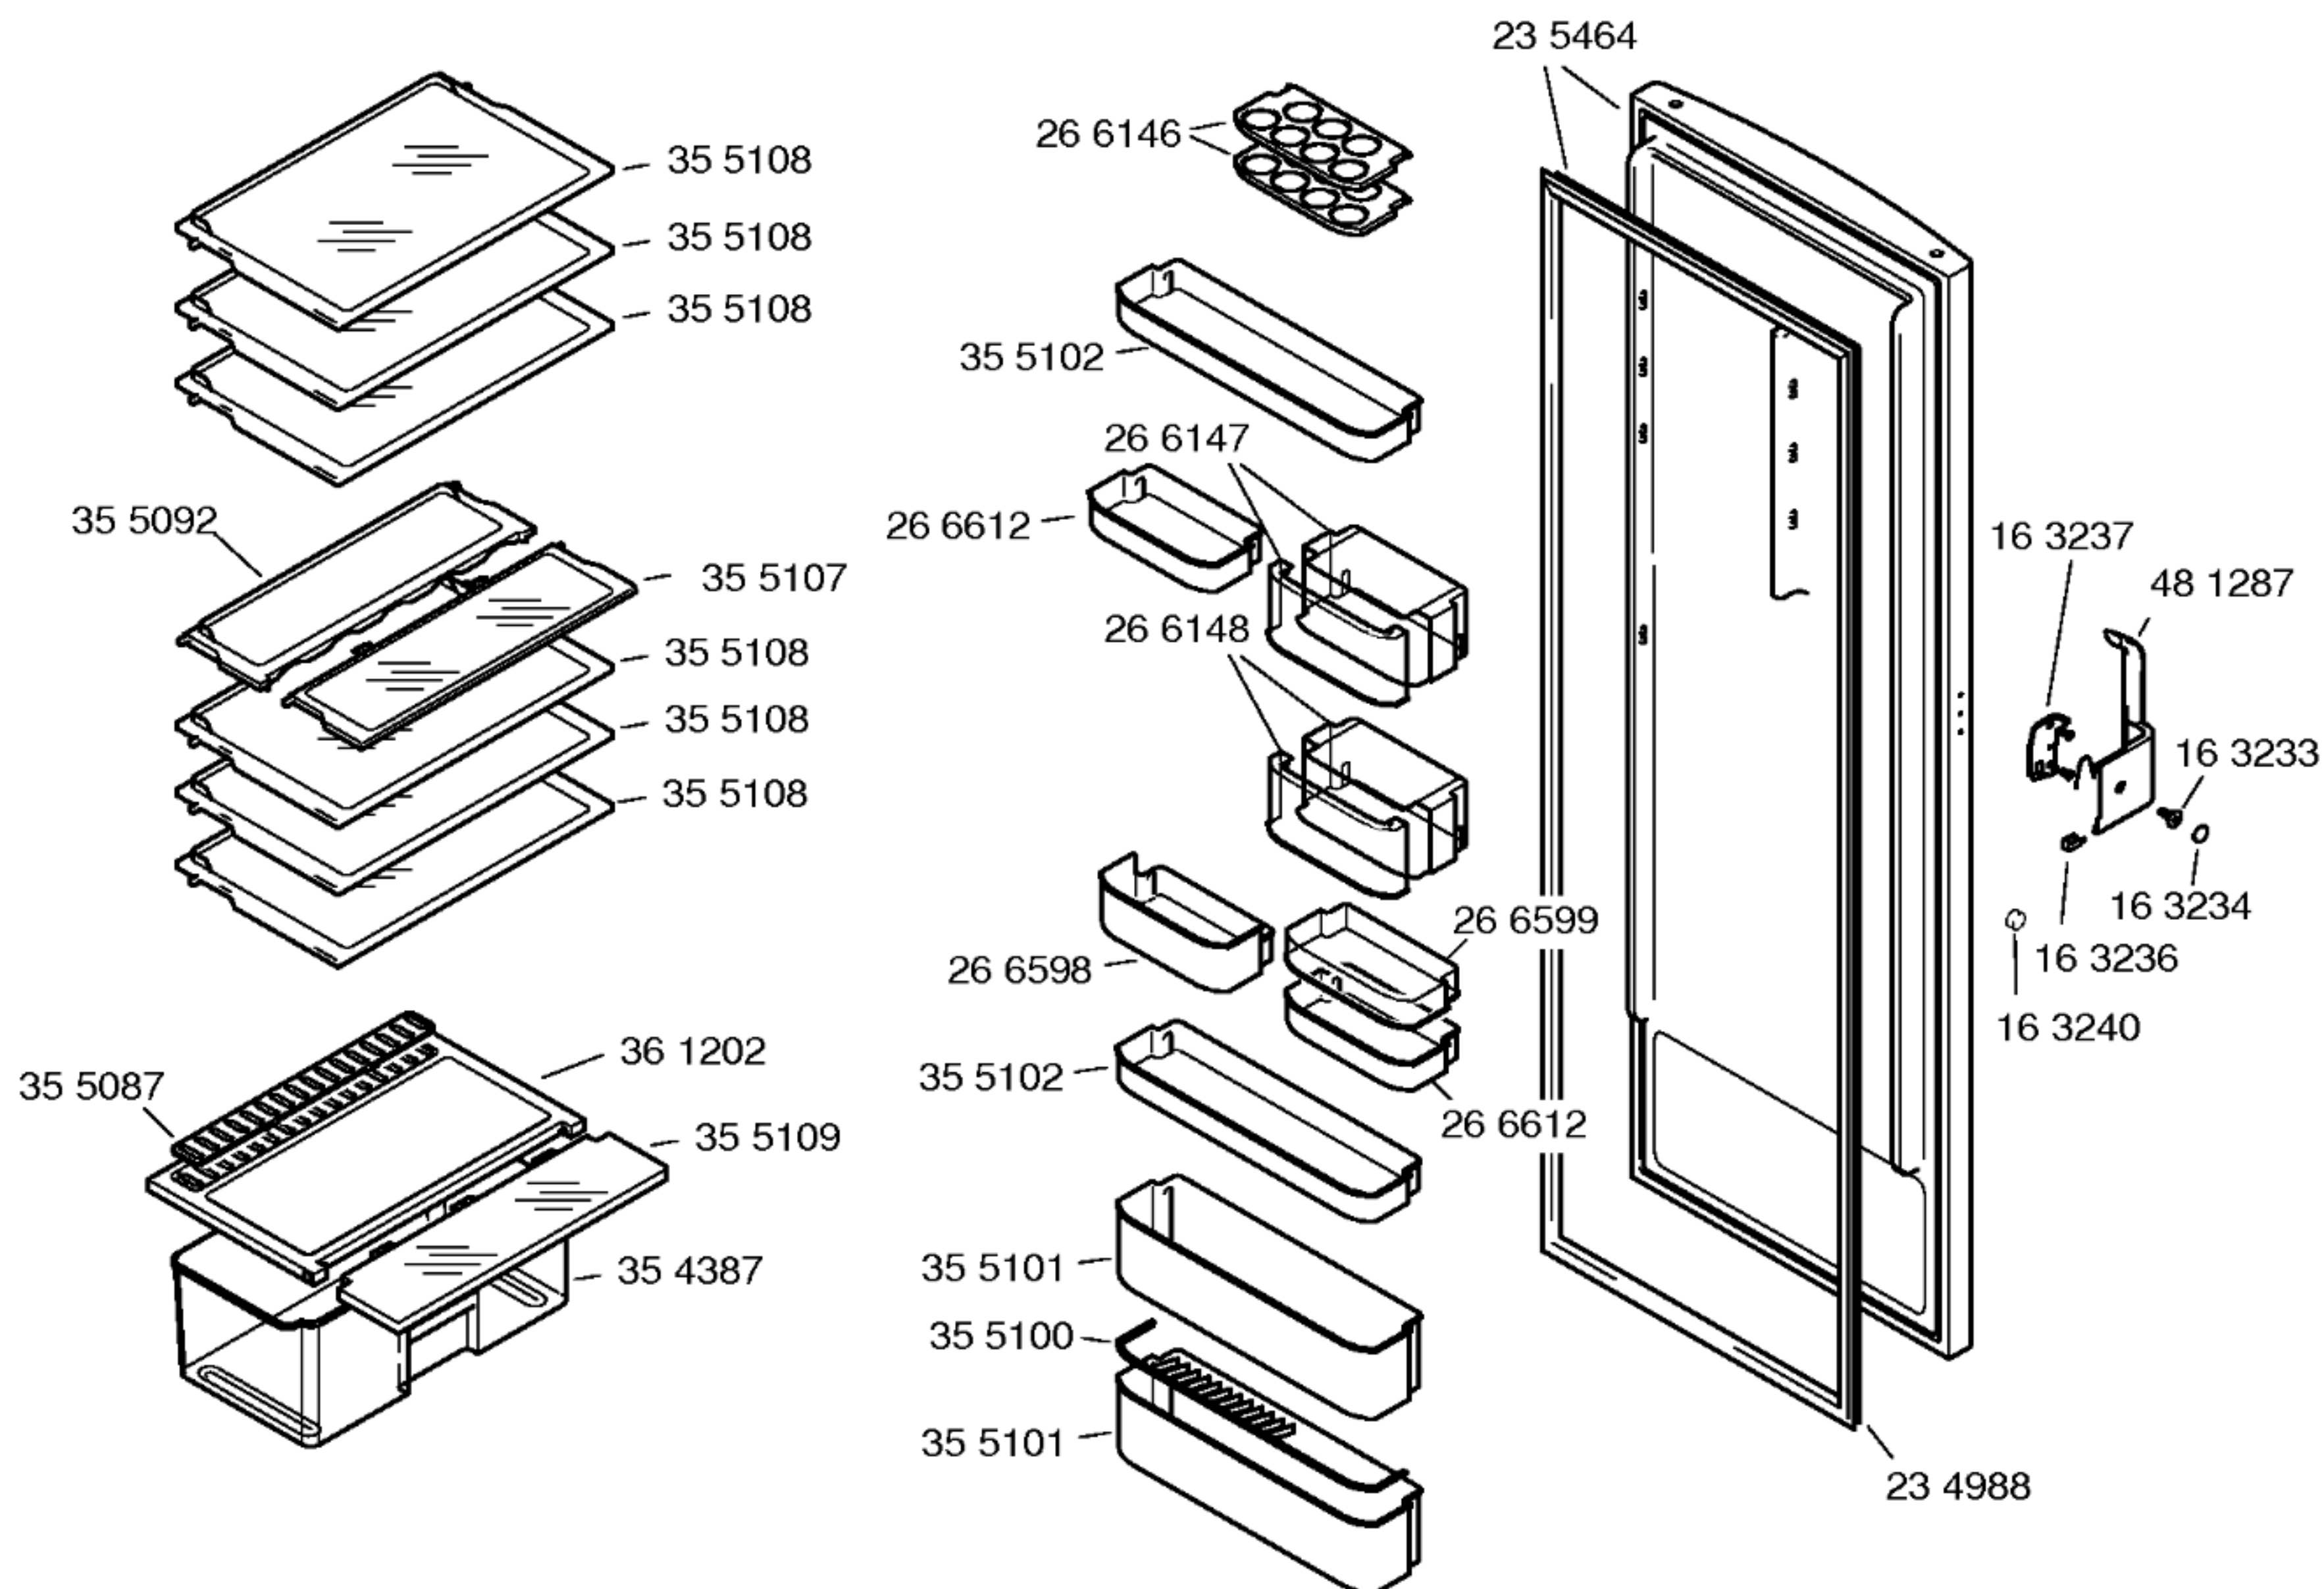



Mat. – Nr. – Konstante  
3740 . . . . .

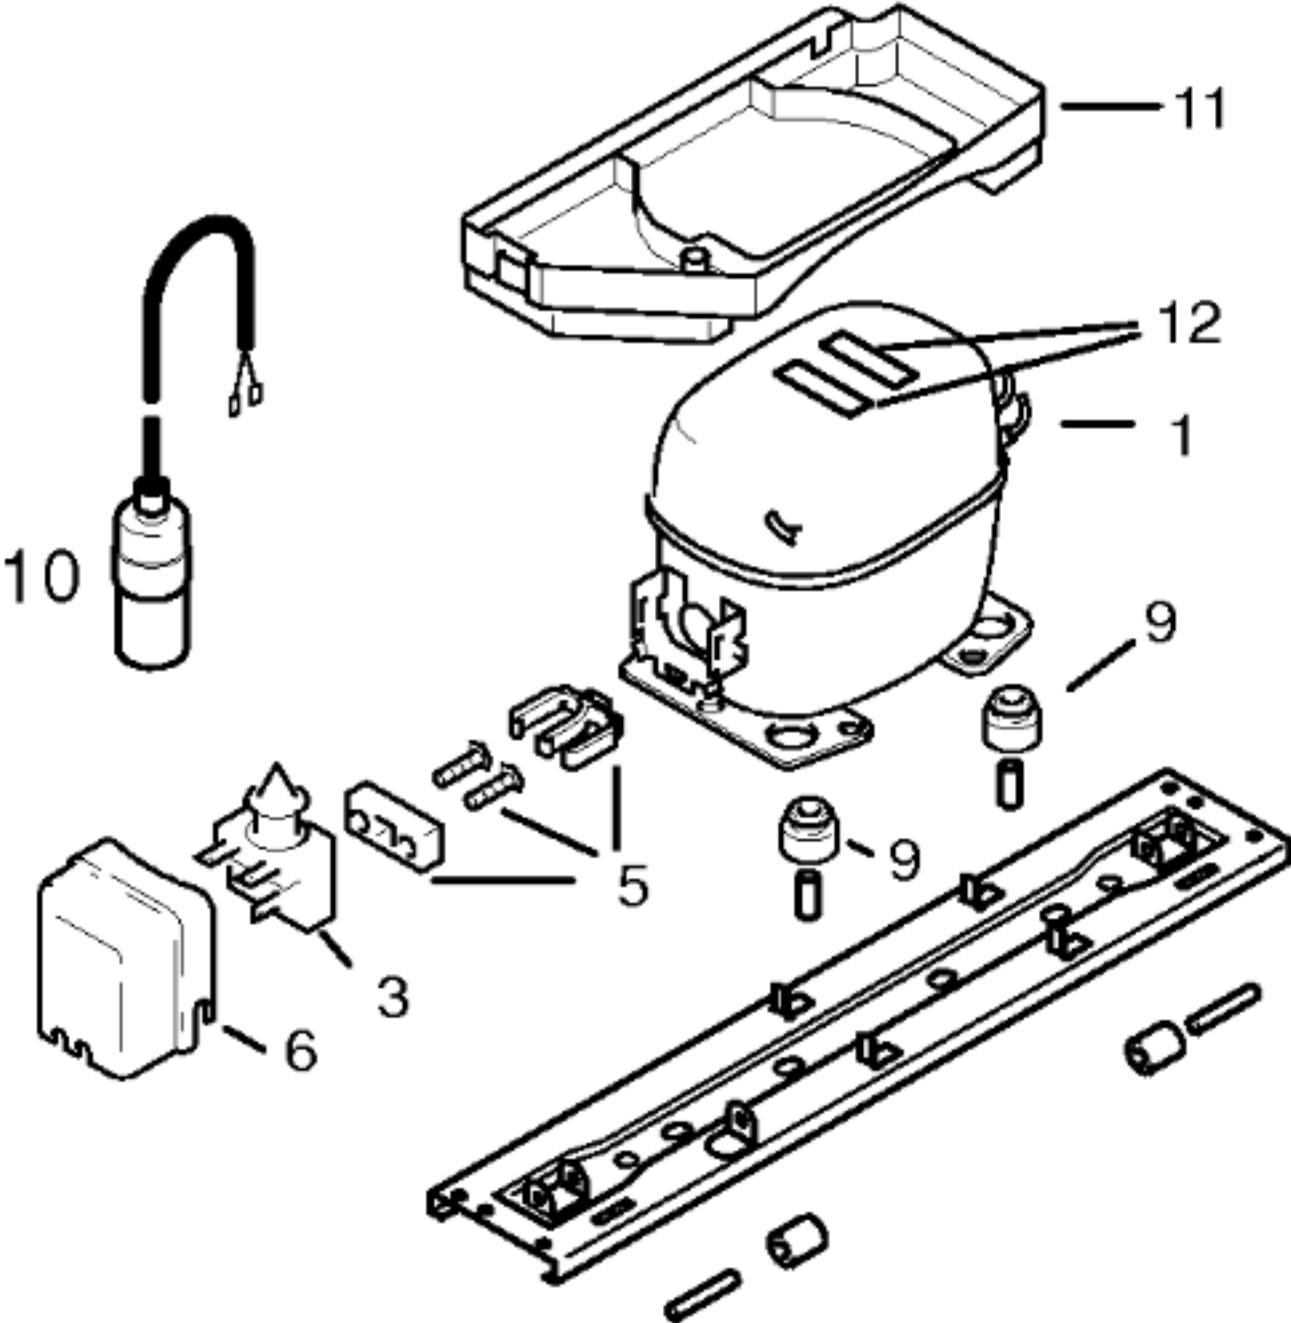

| Pos. | Danfoss   |  |  |
|------|-----------|--|--|
|      | TLY 4 KK2 |  |  |
| 1    | 14 2057   |  |  |
| 2    |           |  |  |
| 3    | 15 1055   |  |  |
| 4    |           |  |  |
| 5    | 15 0760   |  |  |
| 6    | 15 1072   |  |  |
| 7    | 16 9319   |  |  |
| 8    | 26 4879   |  |  |
| 9    | 05 0166   |  |  |
| 10   | 16 5852   |  |  |
| 11   | 08 4744   |  |  |
| 12   |           |  |  |

| TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES |  |           |             |     |
|--------------------------------------------------------|--|-----------|-------------|-----|
| Verdichter/Compressor/Compresseur                      |  | Danfoss   |             |     |
| Typ/Type                                               |  | TLY 4 KK2 |             |     |
| Förderleistung/Delivery/Débit                          |  | l/h       | 695         |     |
| Anlaufstrom/Starting current/Cour de démarrage         |  | A         | 5,9         |     |
| Widerstand/Resistance/Résistance                       |  | Ω         | 49,00       |     |
| Hi/aux                                                 |  | Ω         | 15,00       |     |
|                                                        |  |           |             |     |
| Temp.–Regler/Thermostat                                |  |           |             |     |
| Typ/Type                                               |  |           |             |     |
| Regelstellung/Position                                 |  |           |             |     |
| Schaltwerte/Switching values                           |  | "warm"    |             |     |
| Valeurs de commutation                                 |  | "kalt"    |             |     |
|                                                        |  | "alarm"   |             |     |
|                                                        |  |           |             |     |
| Füllmenge/Fill.quantity/Charge                         |  | R600a     | *           |     |
|                                                        |  |           |             |     |
| Anschlußwert/Conn.load/Puiss. connectée                |  | W         | 43          |     |
|                                                        |  |           |             |     |
| Heizung/Heater/Chauffage                               |  |           |             |     |
| Widerstand/Resistance/Résistance                       |  | Ω         |             |     |
| Leistung/Power/Puissance                               |  | W         |             |     |
|                                                        |  |           |             |     |
| Ventilator/Blower/Ventilateur                          |  |           |             |     |
| Widerstand/Resistance/Résistance                       |  | Ω         |             |     |
|                                                        |  |           |             |     |
| NTC–Fühler / Sensor                                    |  | °C        | kΩ          | °C  |
|                                                        |  | +10       | 9,95 ±0,18  | –18 |
|                                                        |  | +5        | 12,70 ±0,18 | –22 |
|                                                        |  | 0         | 16,33 ±0,16 | –26 |
|                                                        |  |           |             |     |
| Magnetventil/Magnetic valve/Electrovanne               |  |           |             |     |
| Widerstand/Resistance/Résistance                       |  | Ω         |             |     |
| Spannung/Voltage/Tension                               |  | V         |             |     |

\* siehe Typenschild