




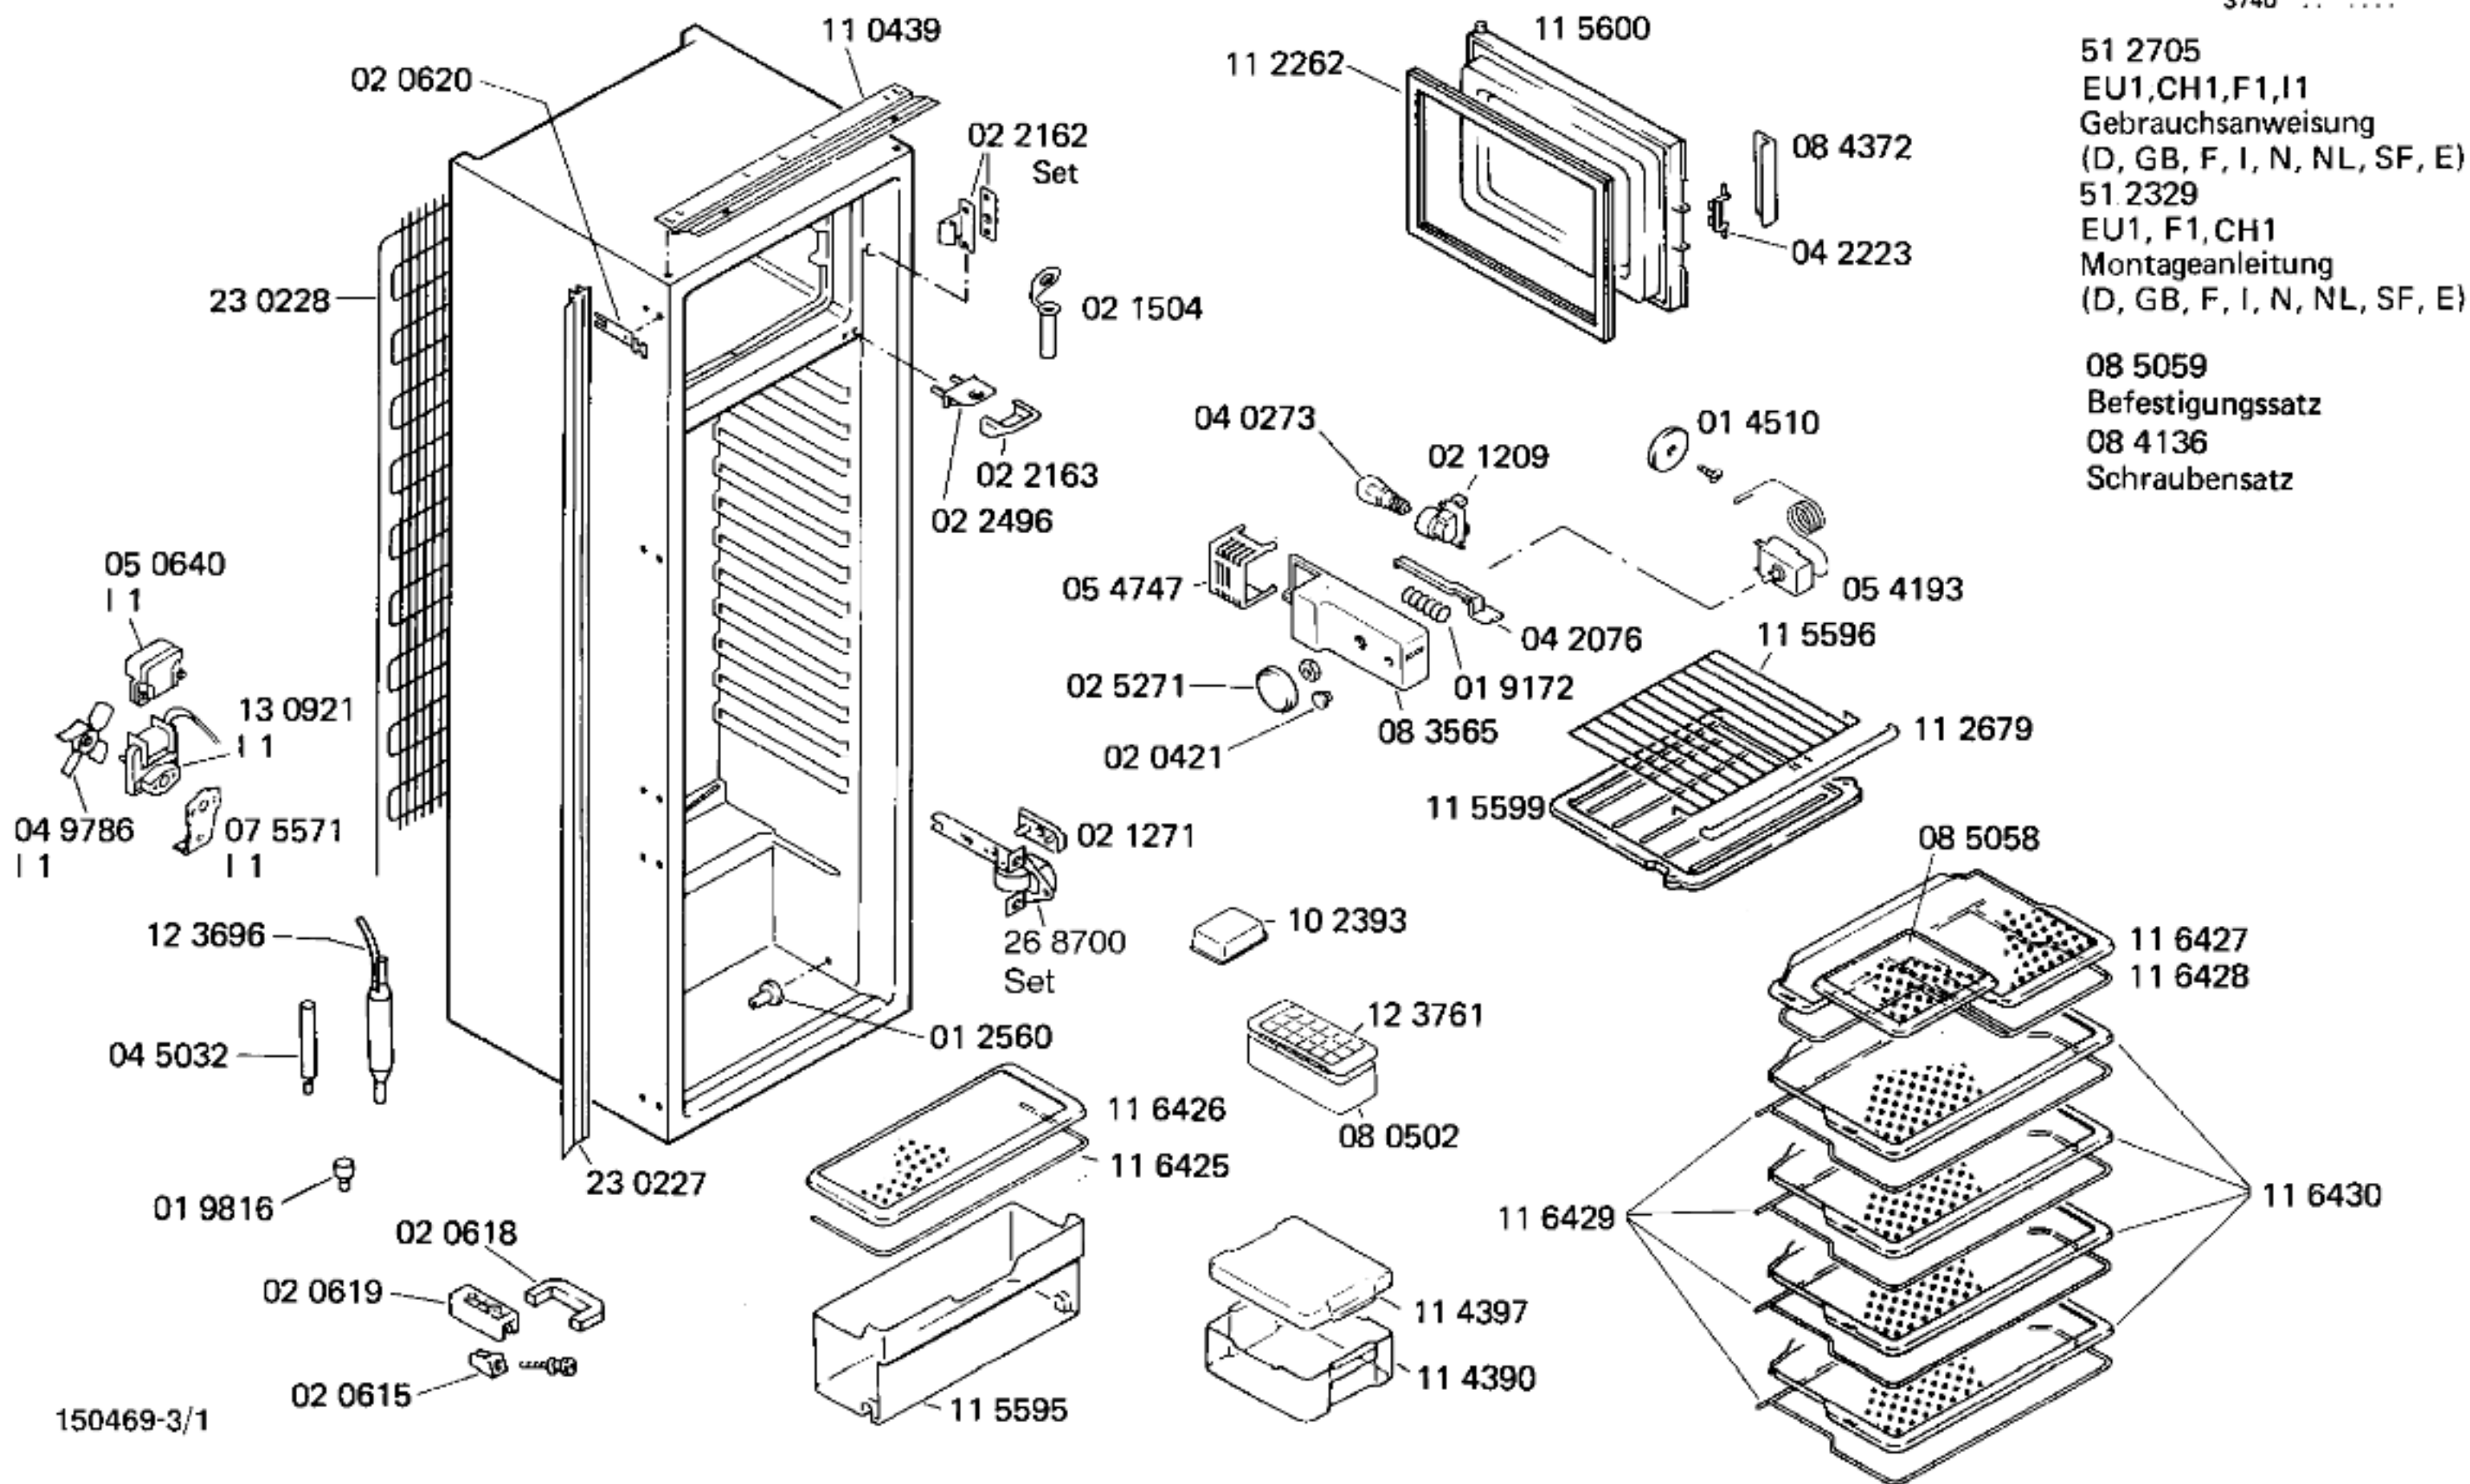

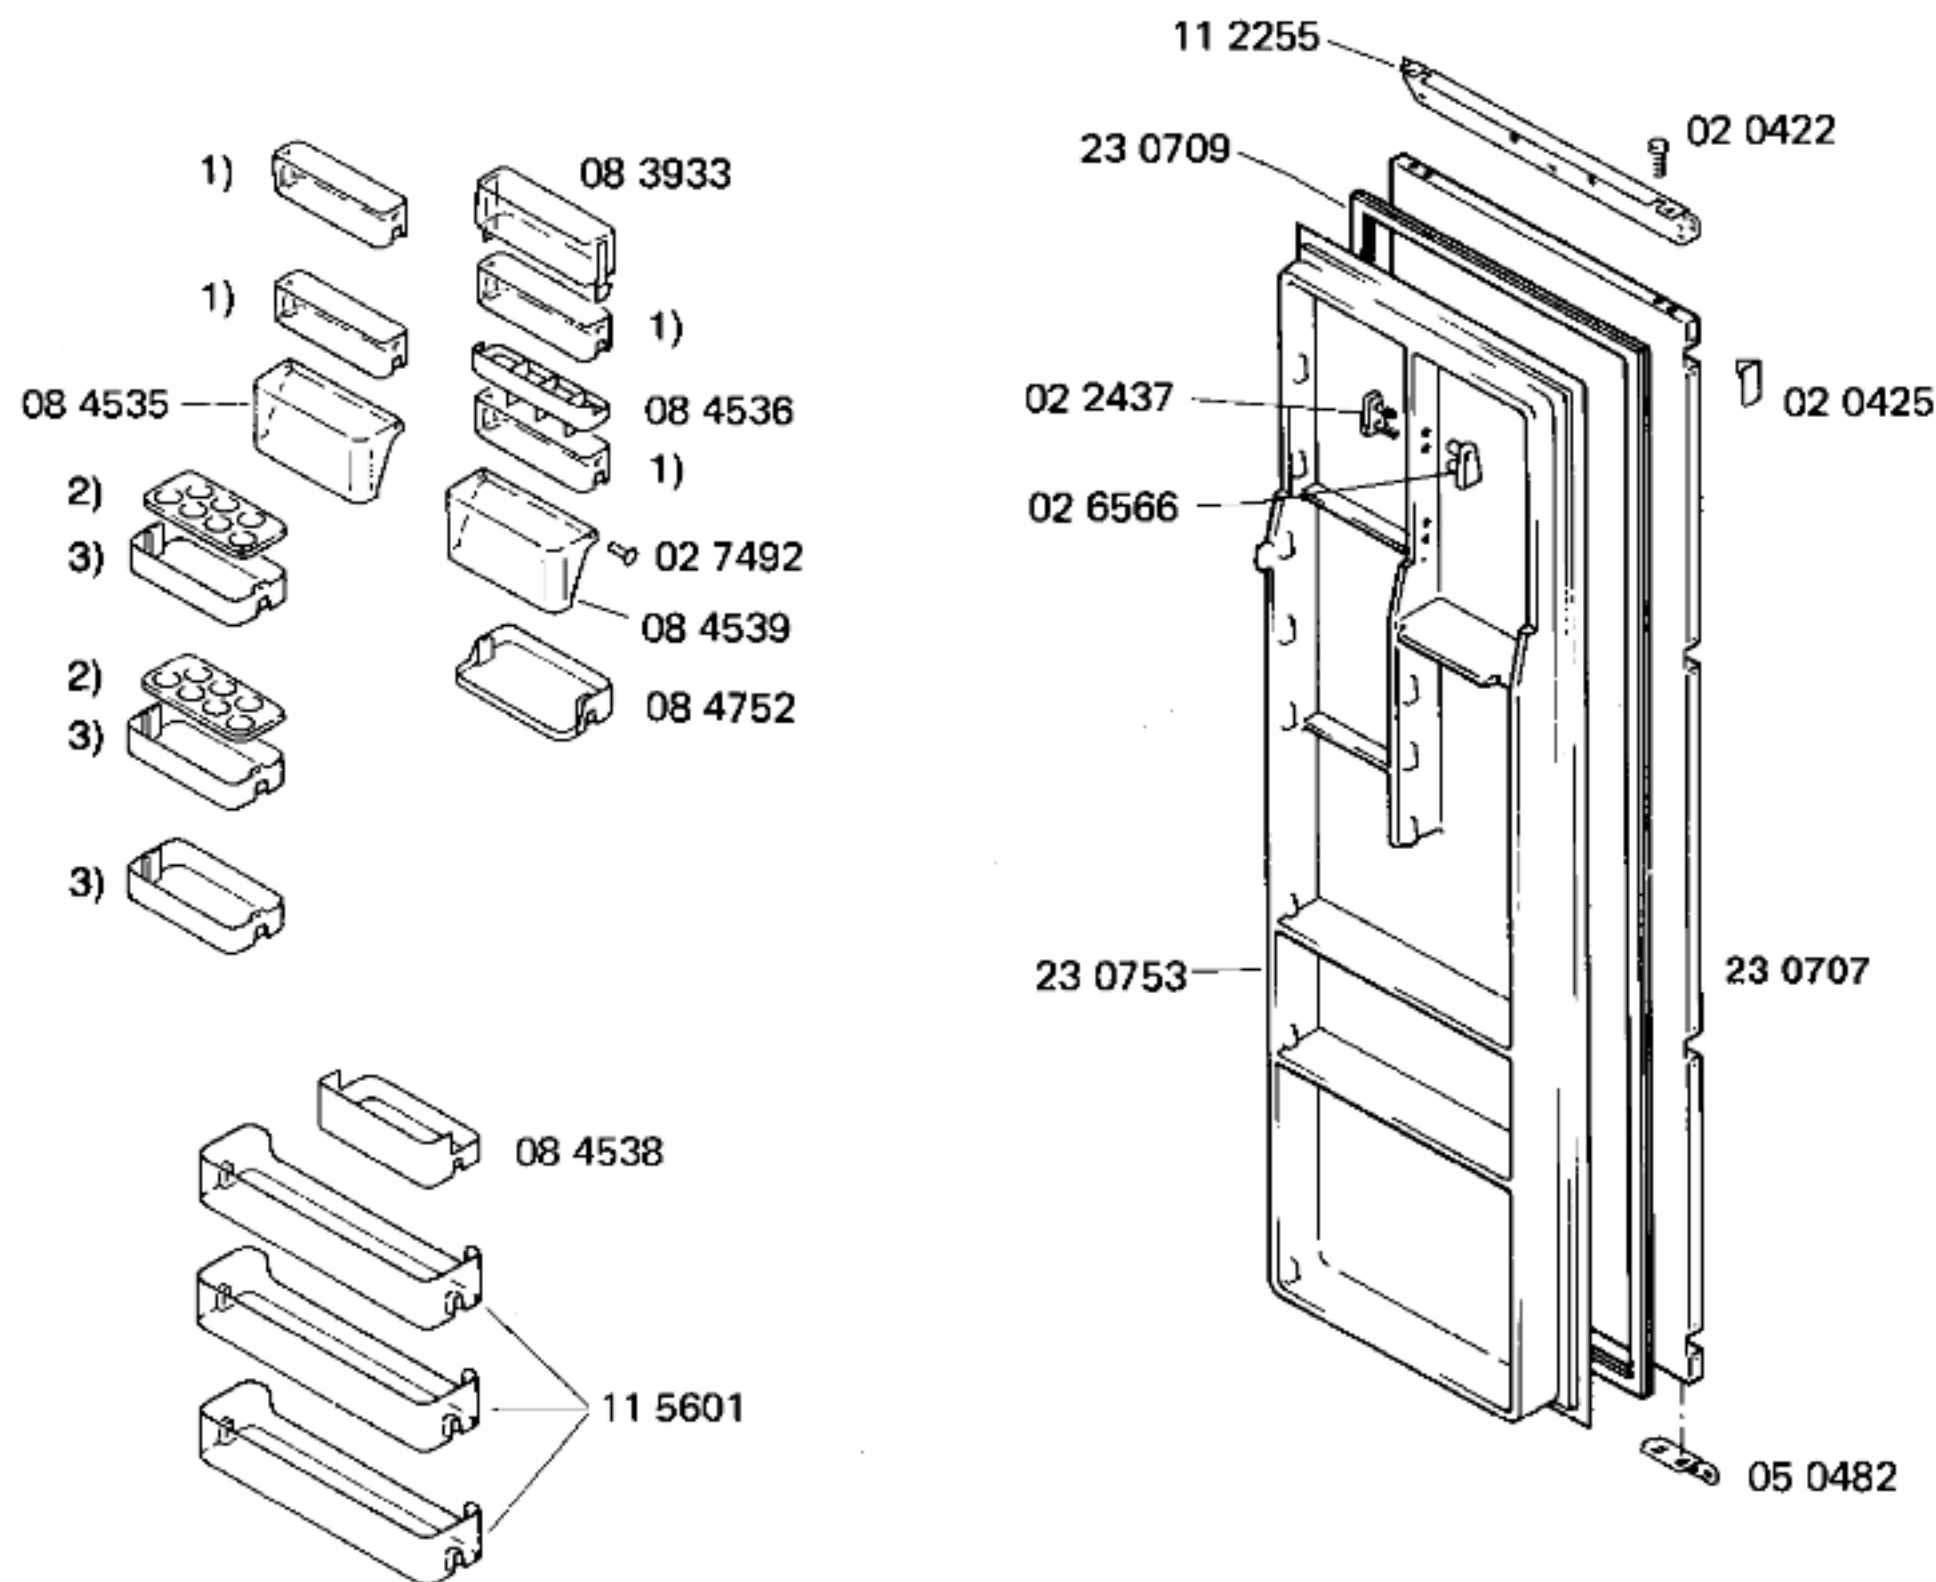

- 1) 08 3898
- 2) 08 1681
- 3) 08 4537

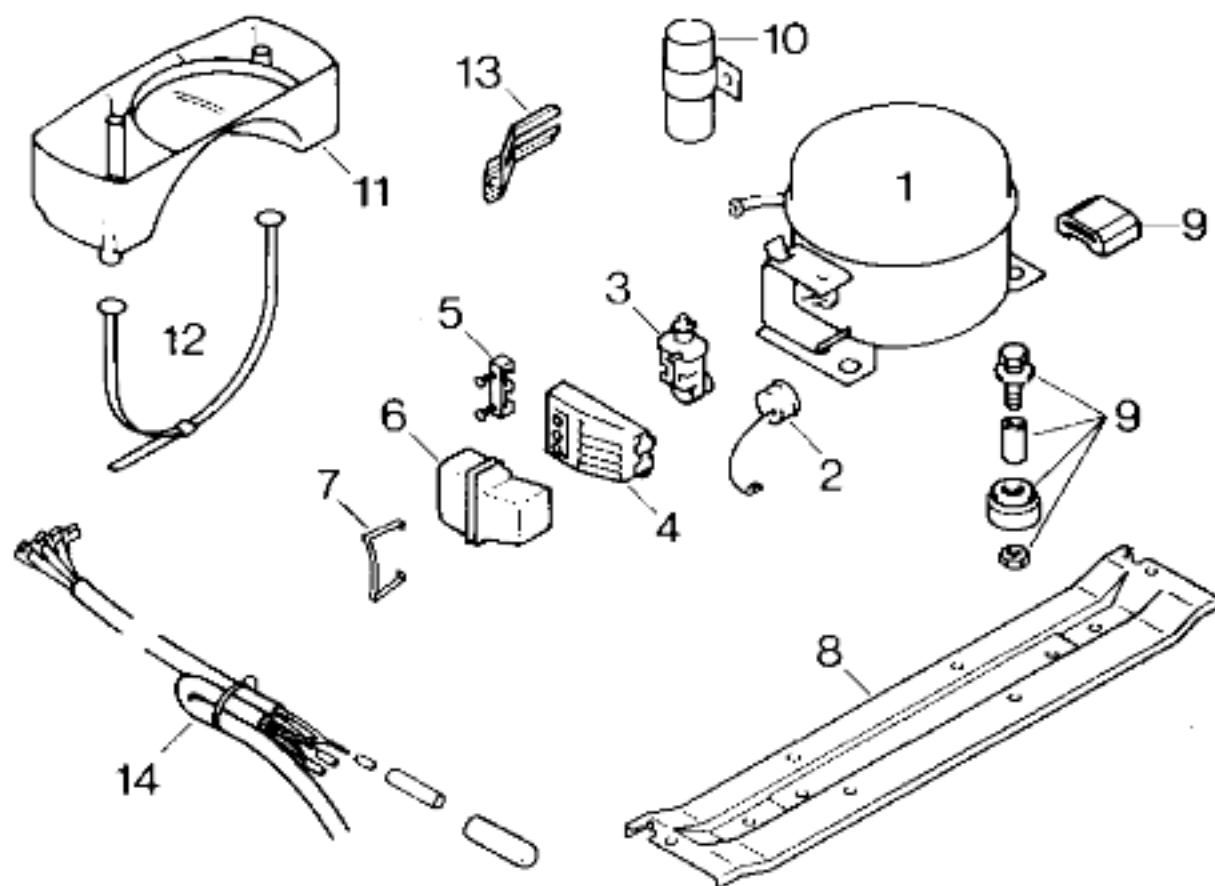

Pos.	EU1,CH1,F1,I1
	Aspera
1	14 0405
2	02 6559
3	02 2342
4	05 1748
5	
6	05 1746
7	02 2339
8	11 1919
9	05 0166
10	
11	08 5091
12	
13	04 2688
14	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Aspera			
Typ/Type		BY 1116 A			
Förderleistung/Delivery/Débit	l/h	1450			
Anlaufstrom/Starting current/Cour. de démarrage	A	9,9			
Widerstand/Resistance/Résistance	Ha/main/prin.	Ω	11,7		
	Hi/aux	Ω	37,7		
Temp.-Regler/Thermostat		M + J			
Typ/Type		TF 57			
Reglerstellung/Position		kalt	warm		
Schaltwerte/Switching values/	„ein“	+ 4	+ 4		
Valeurs de commutation	„aus“	- 28	- 13		
	(„abtauen“ od.)	„alarm“			
Füllmenge/Fill.quantity/Charge	R12	g	180		
Anschlußwert/Conn.load/Puiss. connectée		W	150		
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance	Ω	8800			
Leistung/Power/Puissance	W	5,5			
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance	Ω				
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance	Ω				
Spannung/Voltage/Tension	V				