




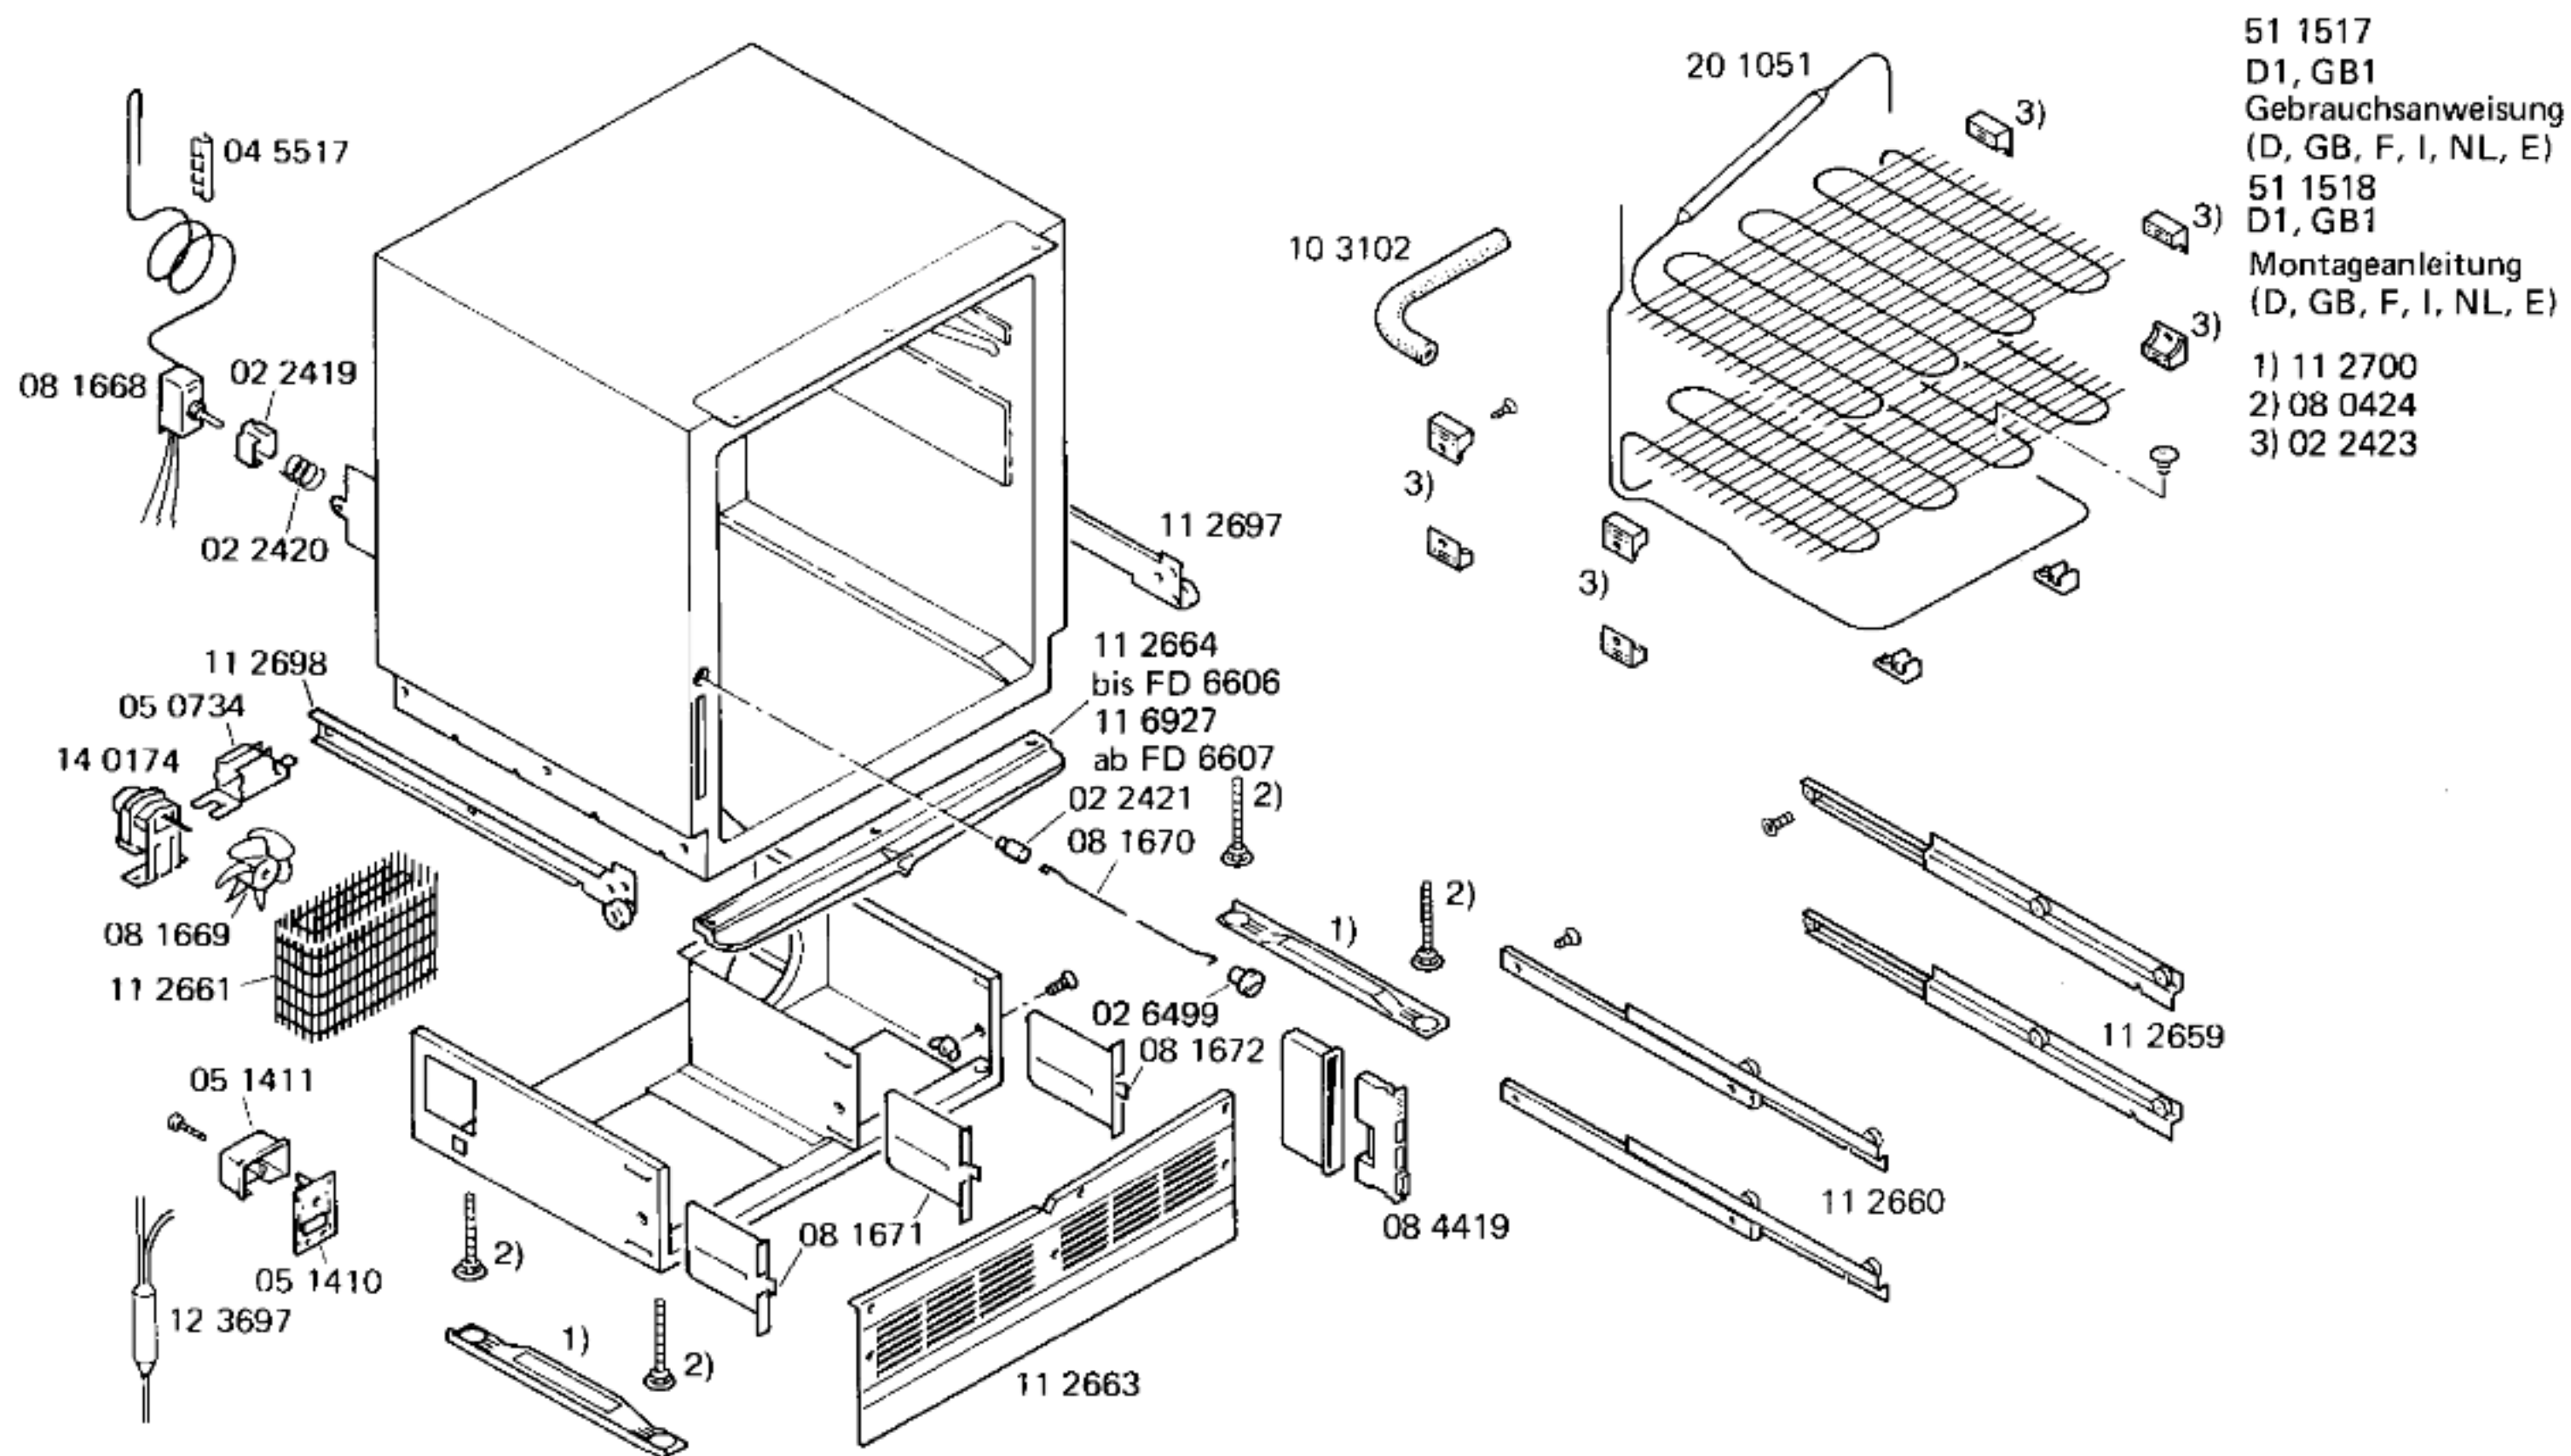

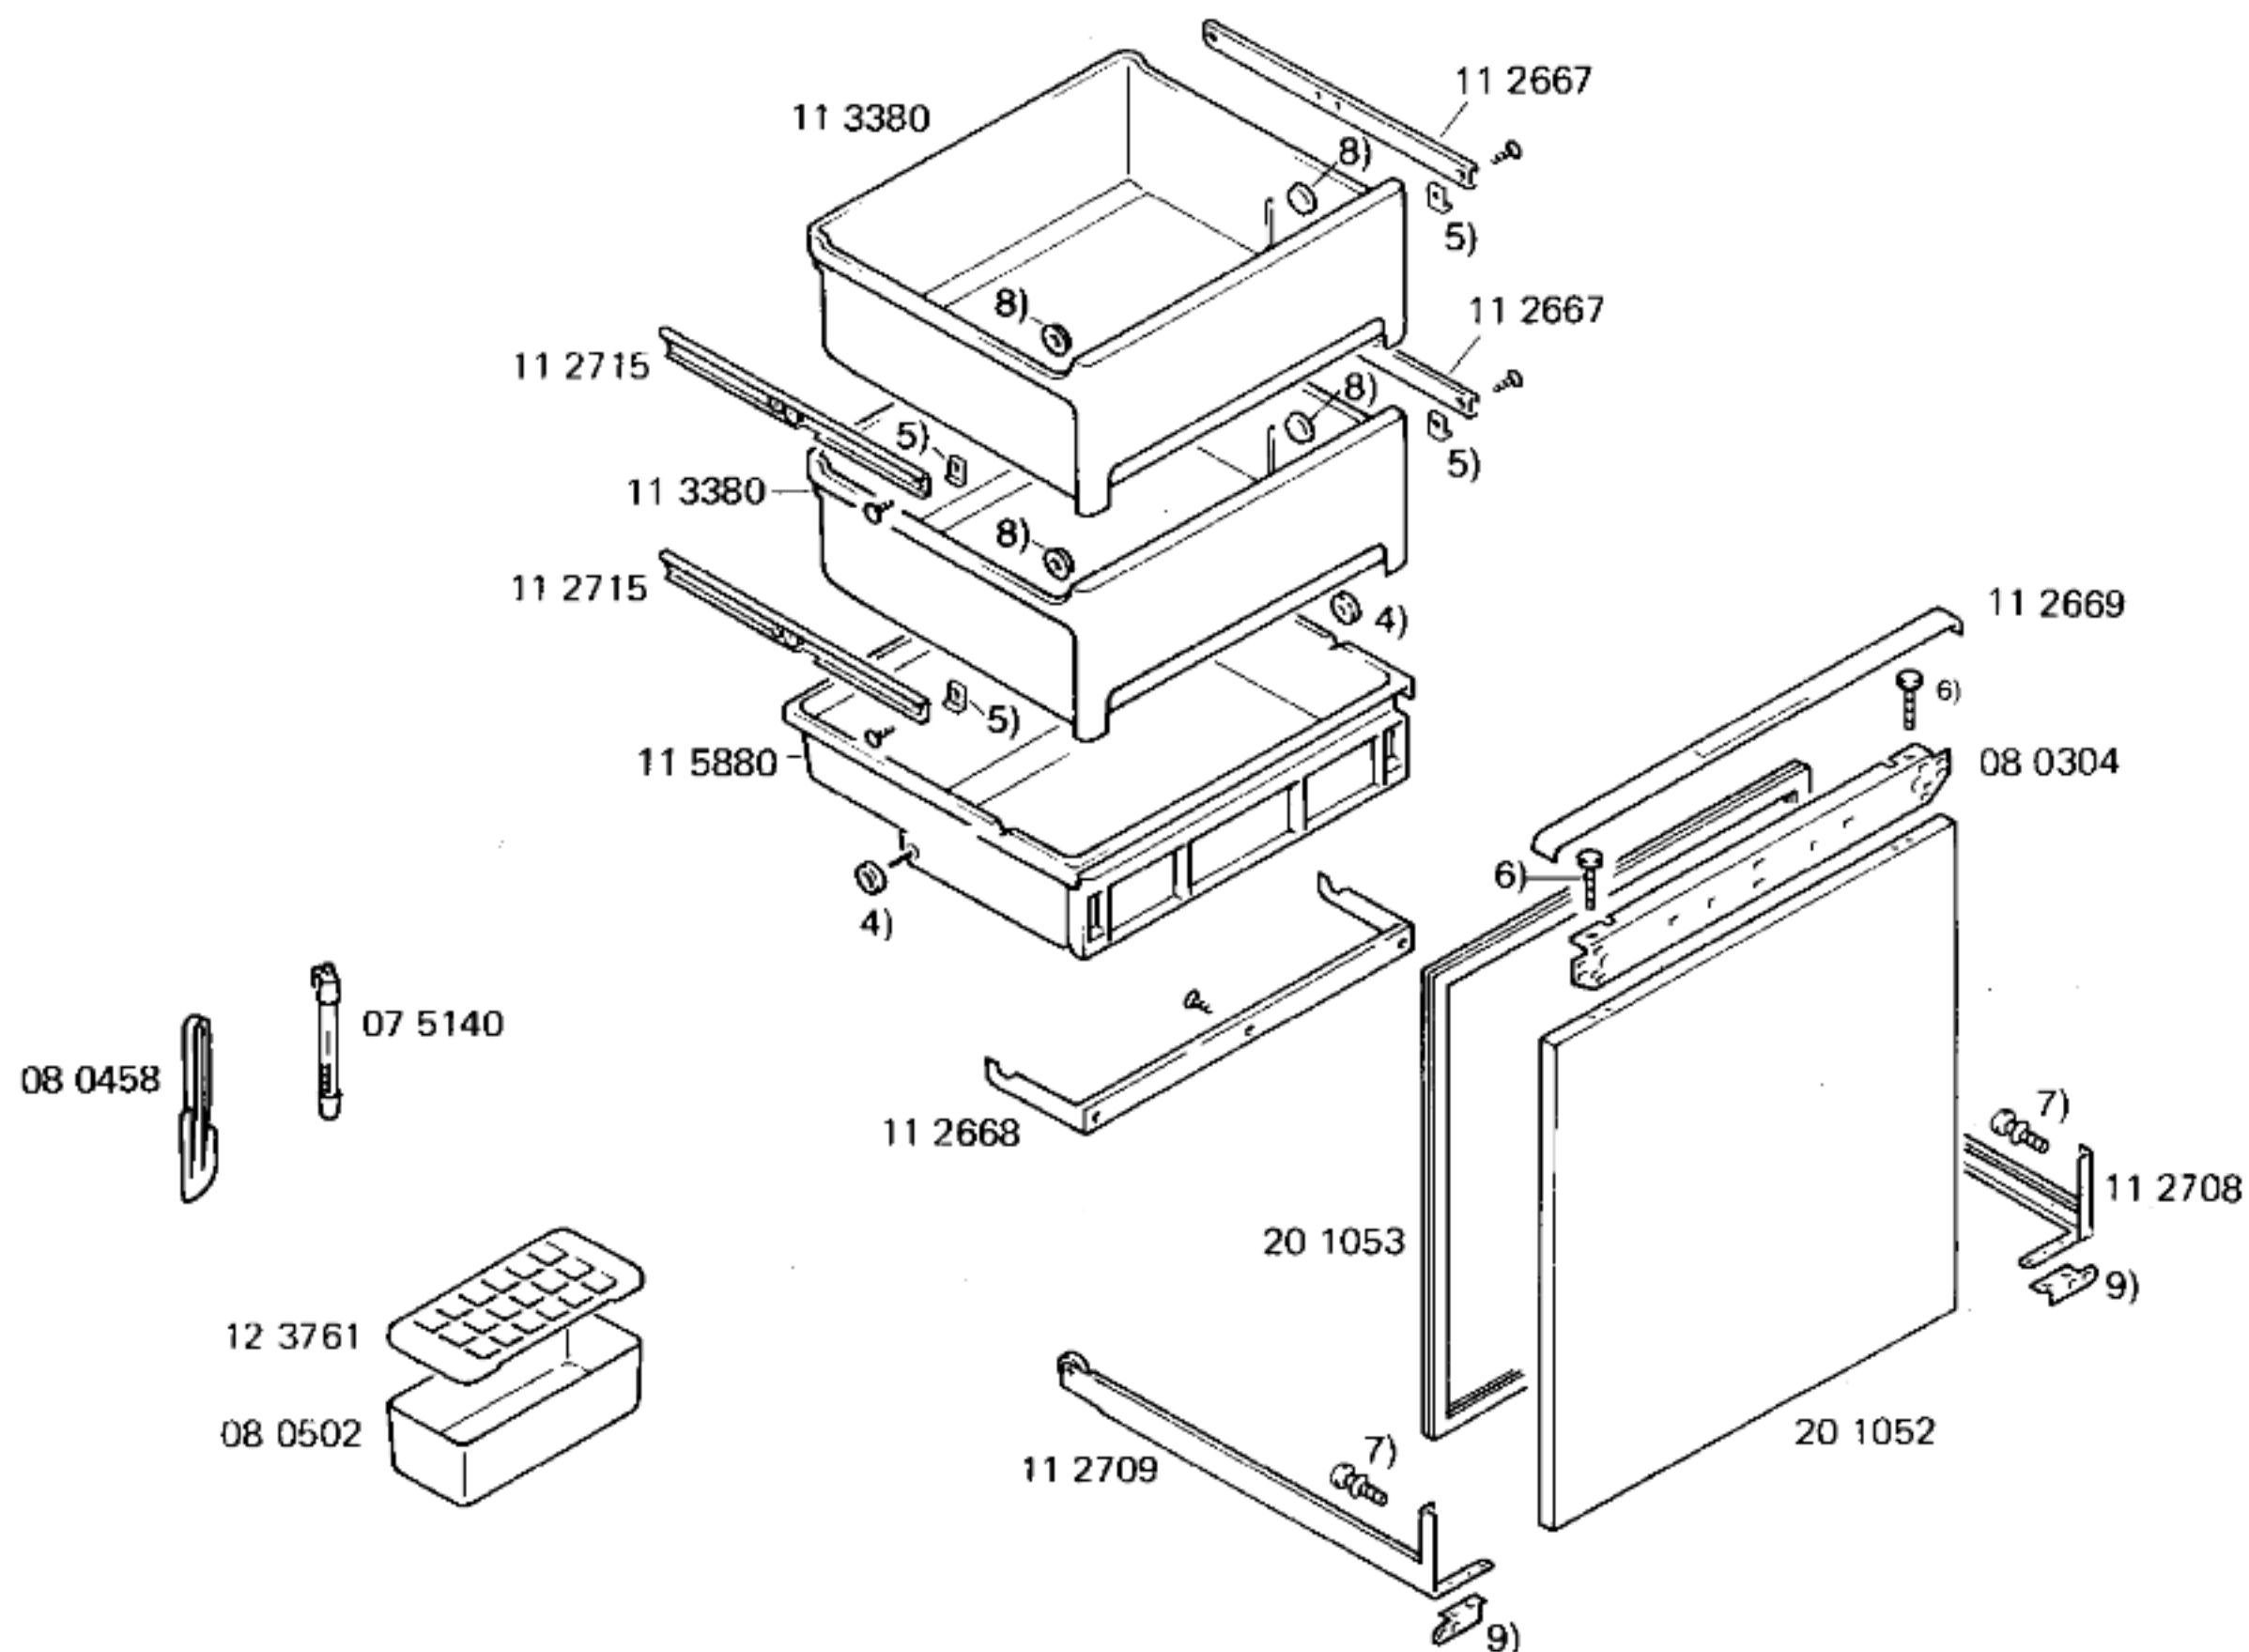

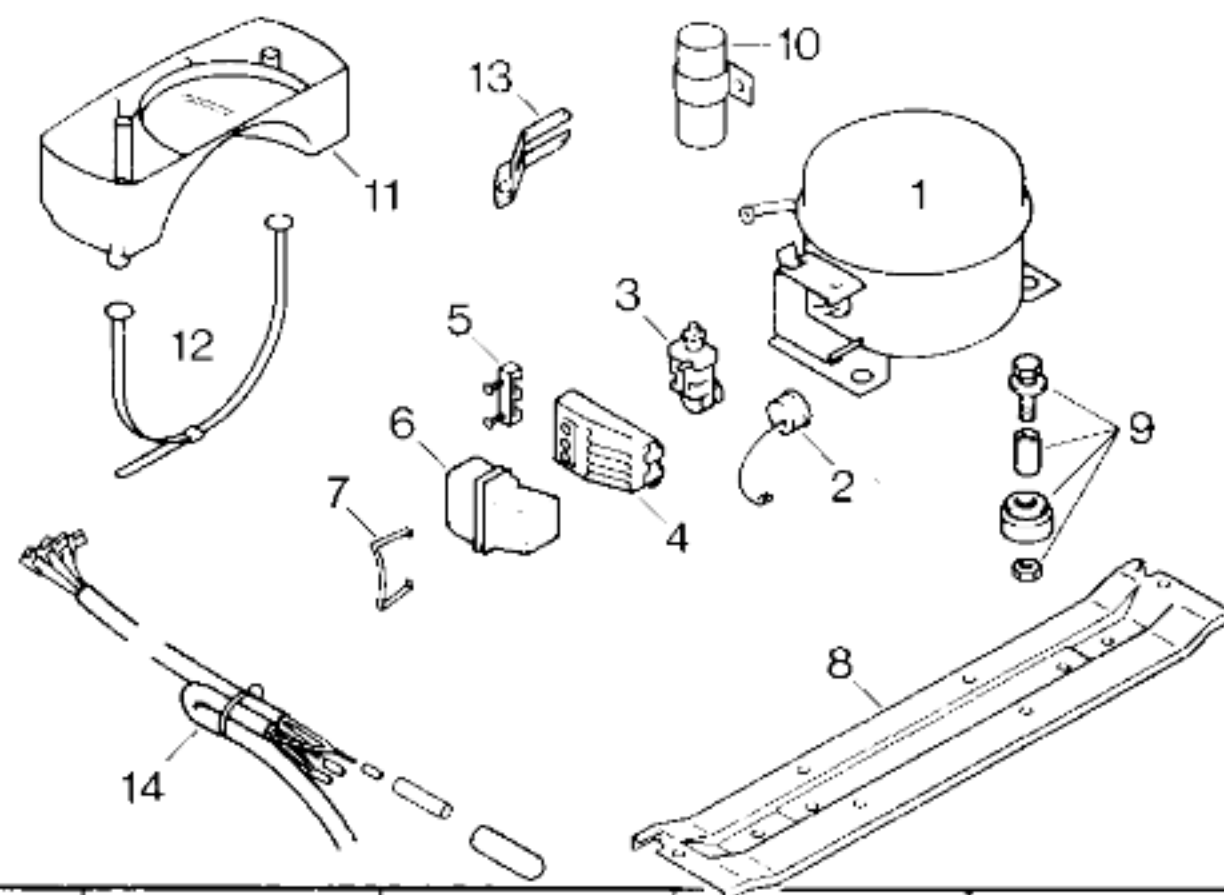

Pos.	Aspera			
1	14 0166			
2	02 2337			
3	02 2342			
4	05 1748			
5				
6	05 1746			
7	02 2339			
8				
9	05 0166			
10				
11				
12				
13				
14				

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Aspera			
Typ/Type		BY 1112 A			
Förderleistung/Delivery/Débit	l/h	1060			
Anlaufstrom/Starting current/Cour. de démarrage	A	8,5			
Widerstand/Resistance/Résistance	Ha/main/prin. Ω	17,9			
	Hi/aux Ω	43,7			
Temp.-Regler/Thermostat		M & J			
Typ/Type		TF 57 SF 2			
Reglerstellung/Position		kalt warm			
Schaltwerte/Switching values/	„ein“ $^{\circ}\text{C}$	-25 -17			
Valeurs de commutation	„aus“	-37 27			
(„abtauen“ od.)	„alarm“	-20 -13			
Füllmenge/Fill quantity/Charge	R12 g	150			
Anschlußwert/Conn. load/Puiss. connectée	W	130			
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance	Ω	6000			
Leistung/Power/Puissance	W	8			
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance	Ω	285			
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance	Ω				
Spannung/Voltage/Tension	V				