



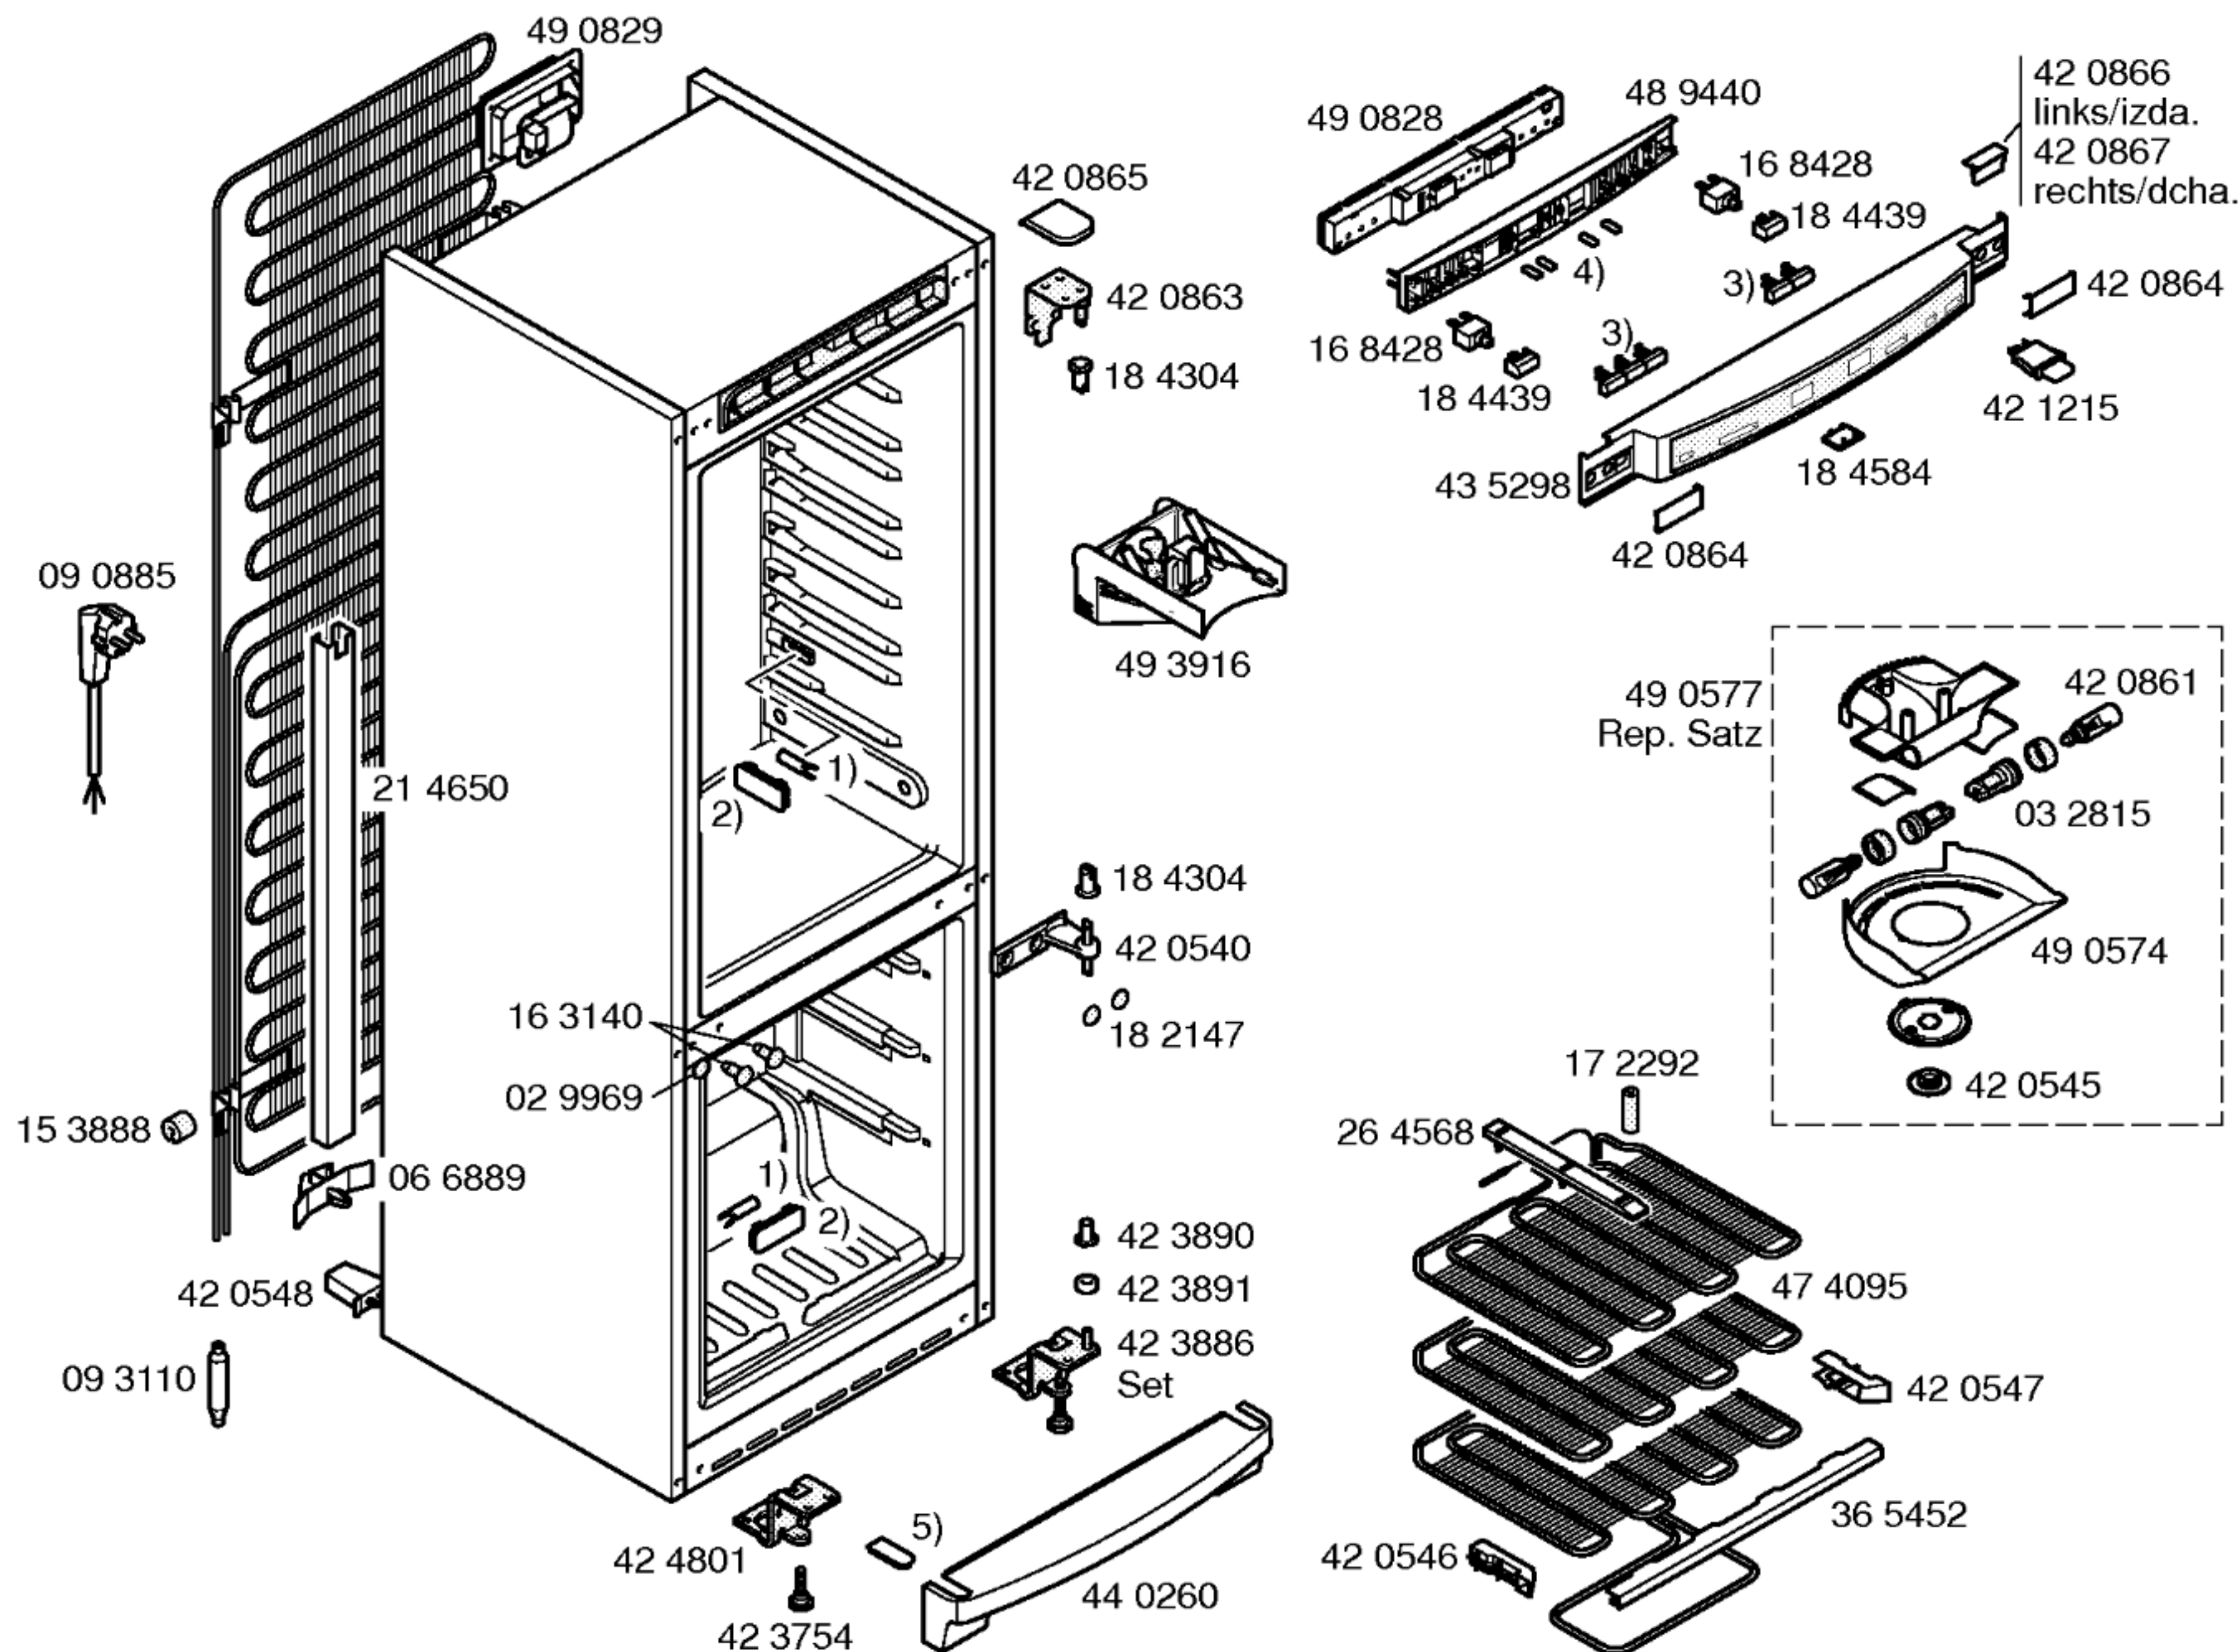


Gebrauchsanweisung
58 7111
(de,en,fr,it,es,pt,el,nl)
58 7112
(sv,no,fi,da,pl,ro,hu,ru)

Montageanweisung
58 9500
(de,en,fr,it,es,pt,el,nl,cs,
no,fi,da,pl,ro,hu,ru)

- 1) 16 8766
Rep. Satz
- 2) 16 9176
- 3) 18 4293
- 4) 18 3934
- 5) 42 5312

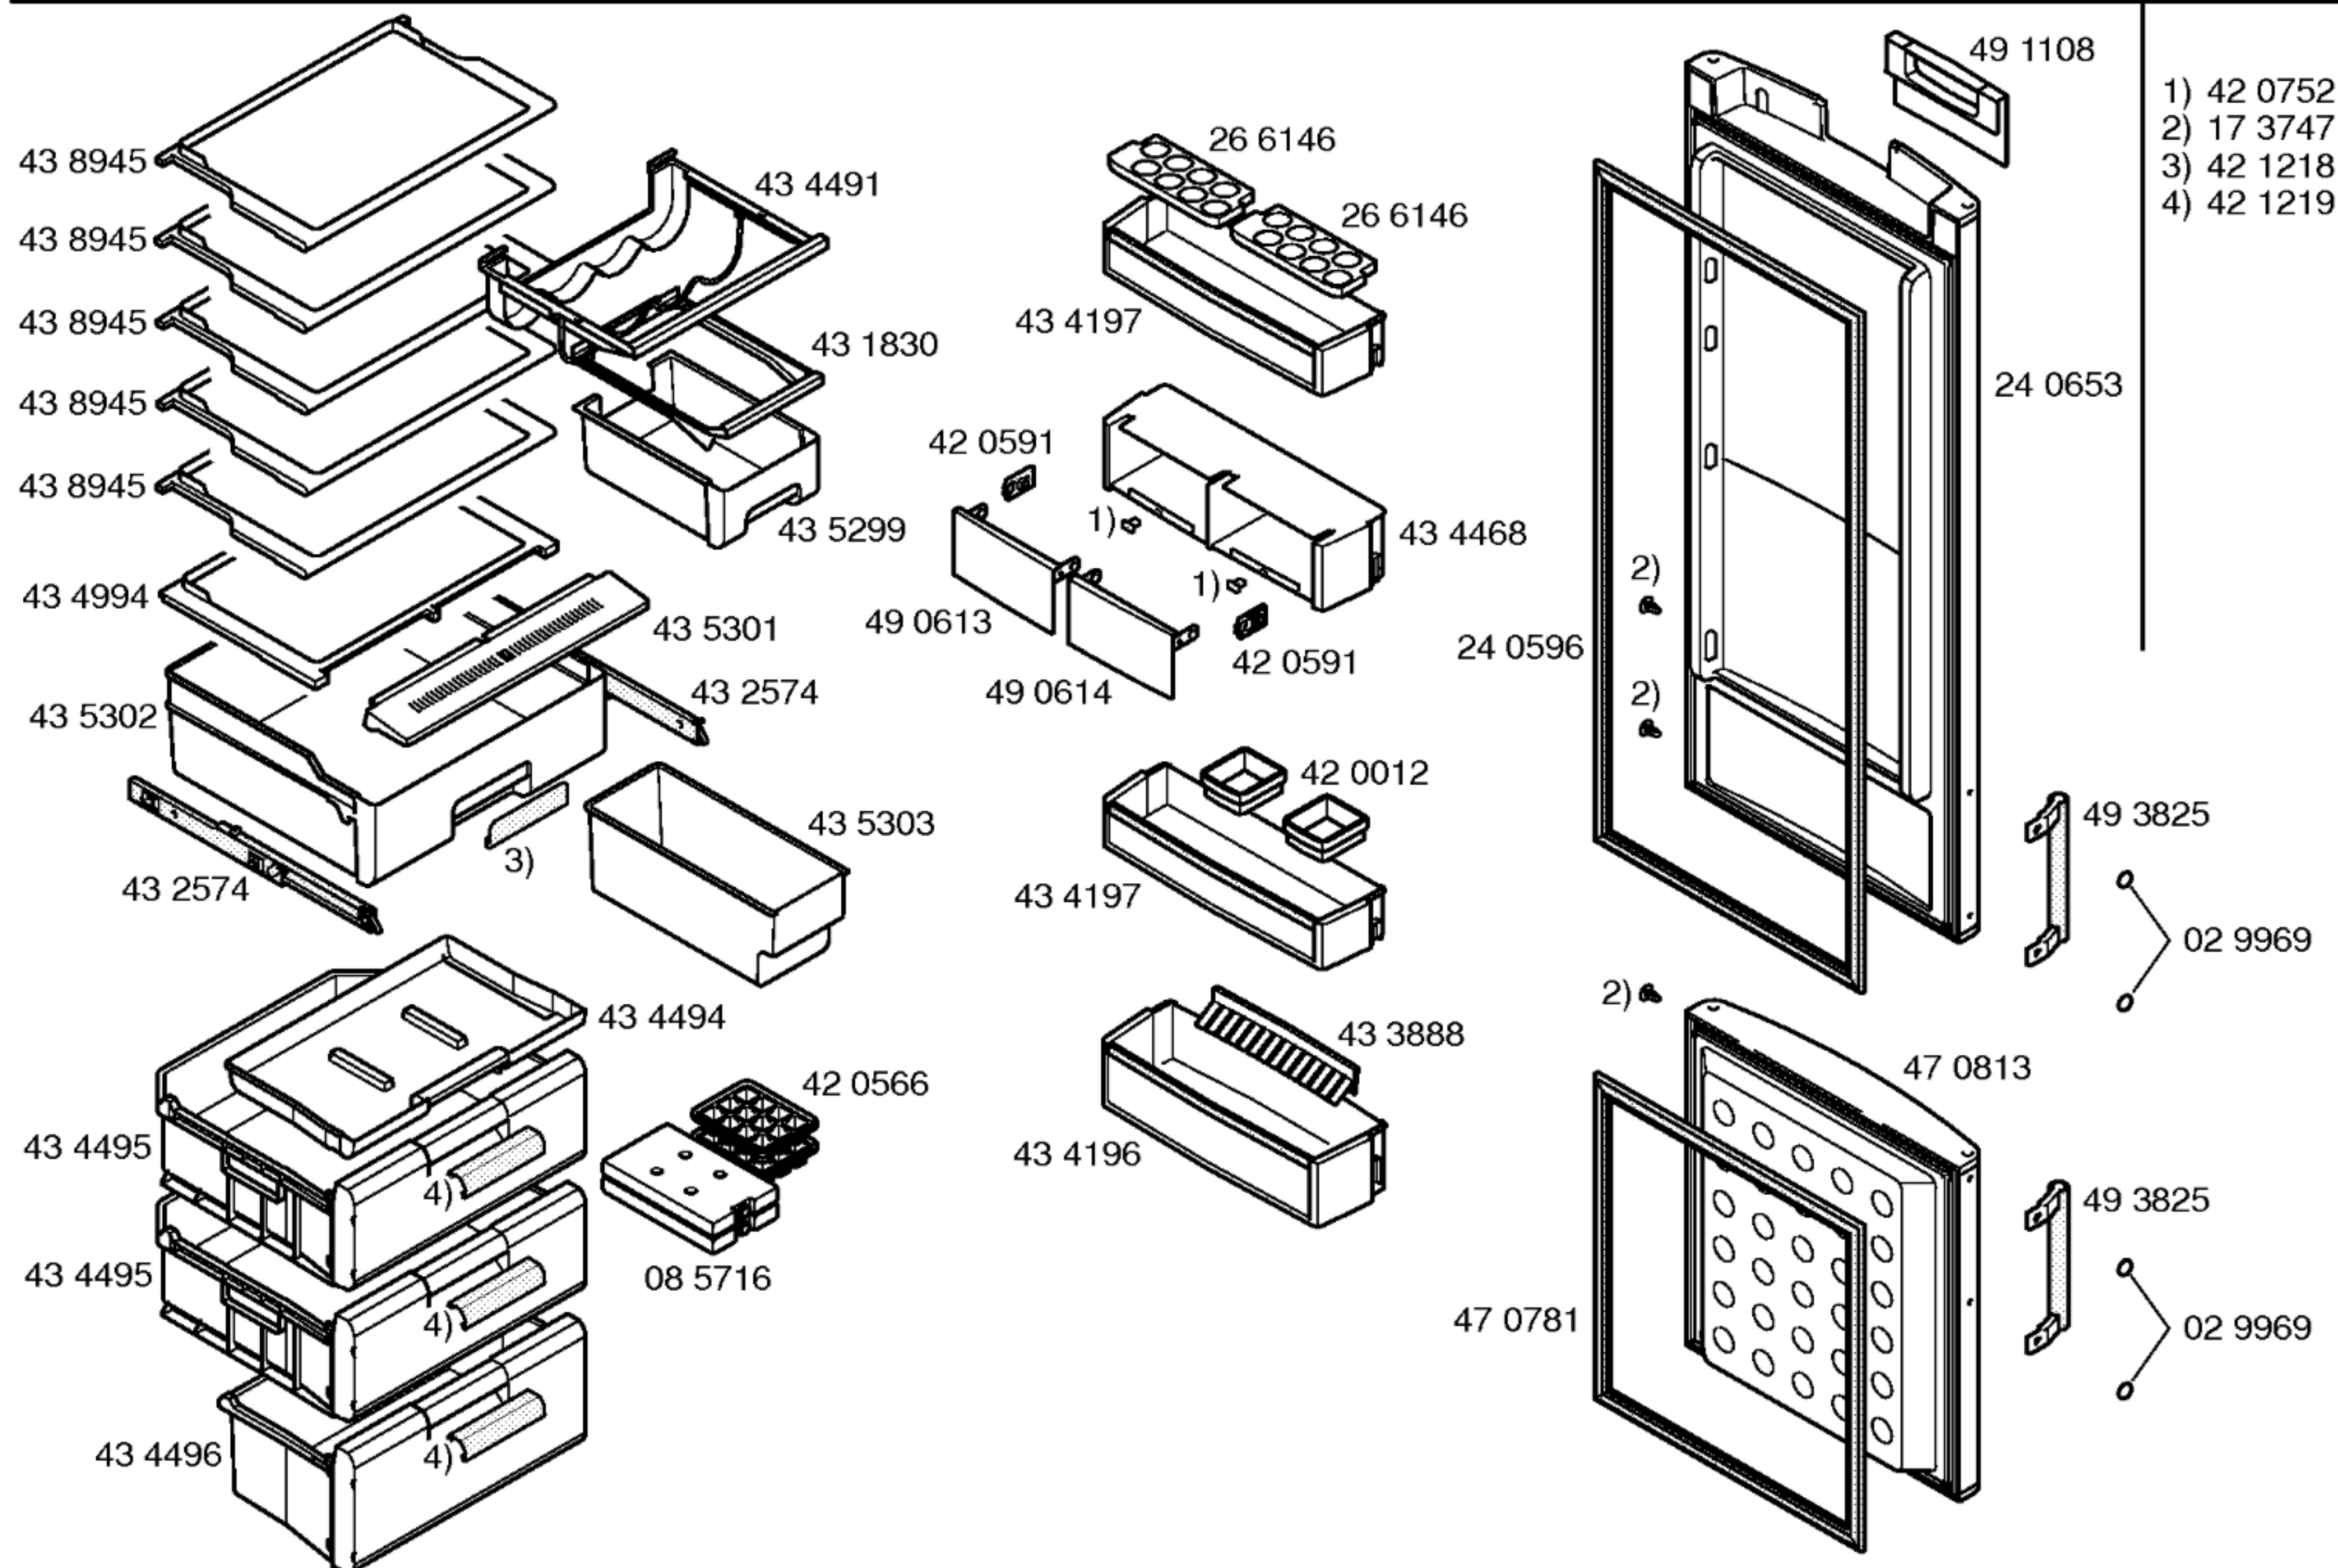

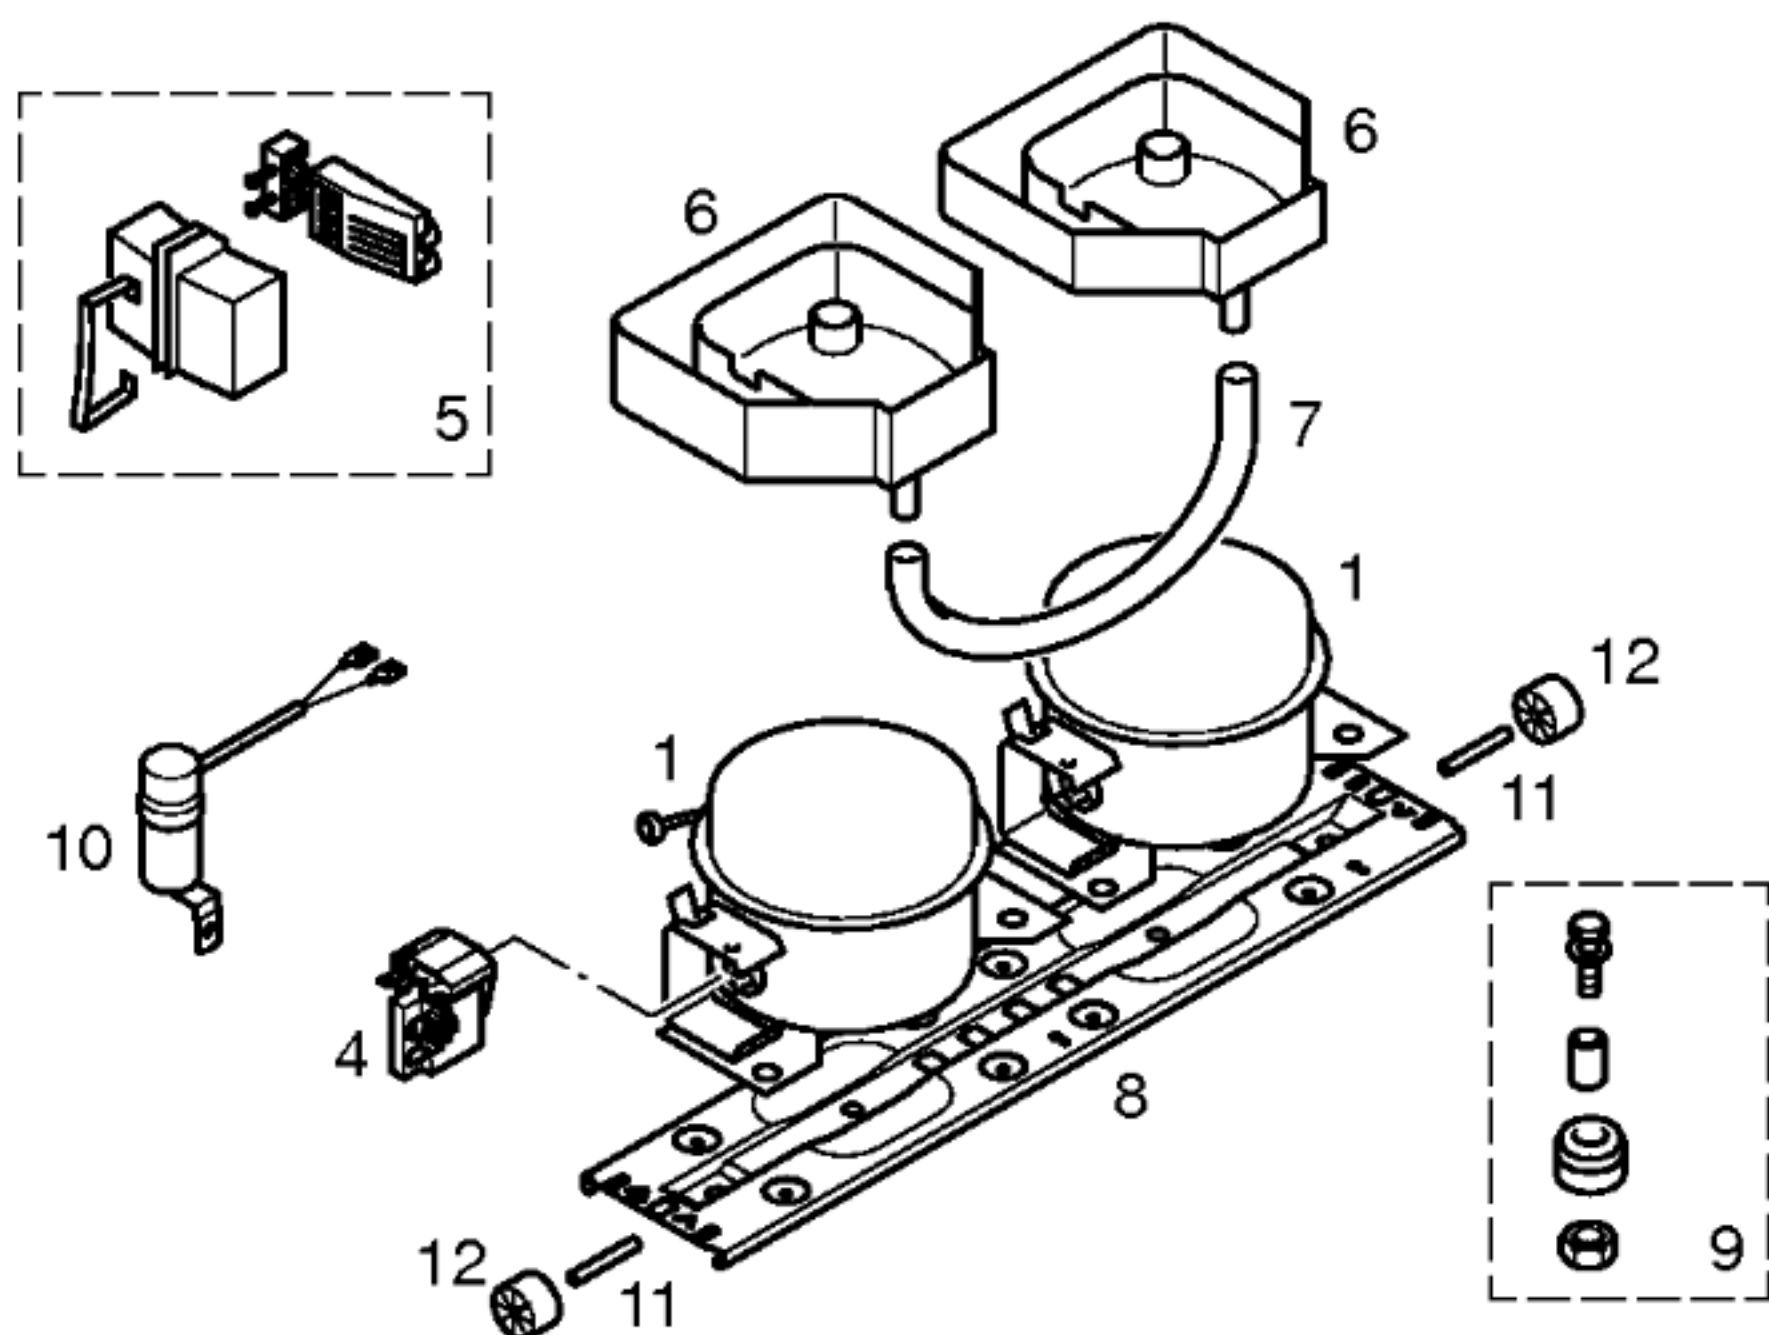

Pos.	Aspera EMY32CLC	Aspera EMY32CLC	****	
1	14 2004	14 2004		
2				
3				
4	42 0759	42 0759		
5				
6	49 0596	49 0596		
7	49 0755	49 0755		
8	44 0795	44 0795		
9	05 0166	05 0166		
10	42 0862	42 0862		
11	15 2770	15 2770		
12	03 1961	03 1961		
13				

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES / DATOS TECNICOS

Verdichter/Compressor/Compresseur/Compresor Typ/Type/Tipo		Aspera EMY32CLC	Aspera EMY32CLC
Förderleistung/Delivery/Debit/Aspiración l/h			
Strom/Current (FLA)/Courant/Intensidad LMBP A		0,27	0,27
Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm		43,30	43,30
	Hi/sub/aux. Ohm	32,90	32,90
Temp.Reyler/Thermostat/Termostato Typ/Type/Tipo		Electronic. KS E2000 Komfort	Electronic. GS E2000 Komfort
Reglerstellung/Position/Conexión		MIN. MAX.	MIN. MAX.
Schaltwerte/Switching values/ ..ein/conexión °C		11 1	-17,5 -25,5
Valeurs de commutation/Desconex. ..aus"/desconex. °C		10 0	-18,5 -26,5
(..abtaven' od) ..alarm' °C			
Verdampfersensor/Evaporator sensor/Sonda evaporador			
Schaltwerte/Switching values/ ..ein/conex. °C		4 4	
Valeurs de commutation/Desconex. ..aus"/descon. °C		— —	
Füllmenge/Fill. quantity/Charge/Carga R600a. g		*	*
Anschlusswert/Comm. load/Puiss. Connect./Potencia W		71	71
Heizung/Heater/Chauflage/Resistenc.descong. Widerstand/Resistance/Resistencia Ohm			
Leistung/Power/Puissance/Potencia W			
Ventilador/Blower/Ventilateur/Ventilador Widerstand/Resistance/Resistencia Ohm			
Magnetventil/Magnetic valve/Electrovanne/Electrovalvula Widerstand/Resistance/Resistencia Ohm			
Spannung/Voltage/Tension/Tensión V			
Temp.Reyler/Thermostat/Termostato ambiente para ventilador refrigerador			

* Siehe Typenschild /See identification plate /Voir plaquette de caractéristiques /Ver plaqueta de características