





07 4445

35 4305

16 9300

48 1147
Set

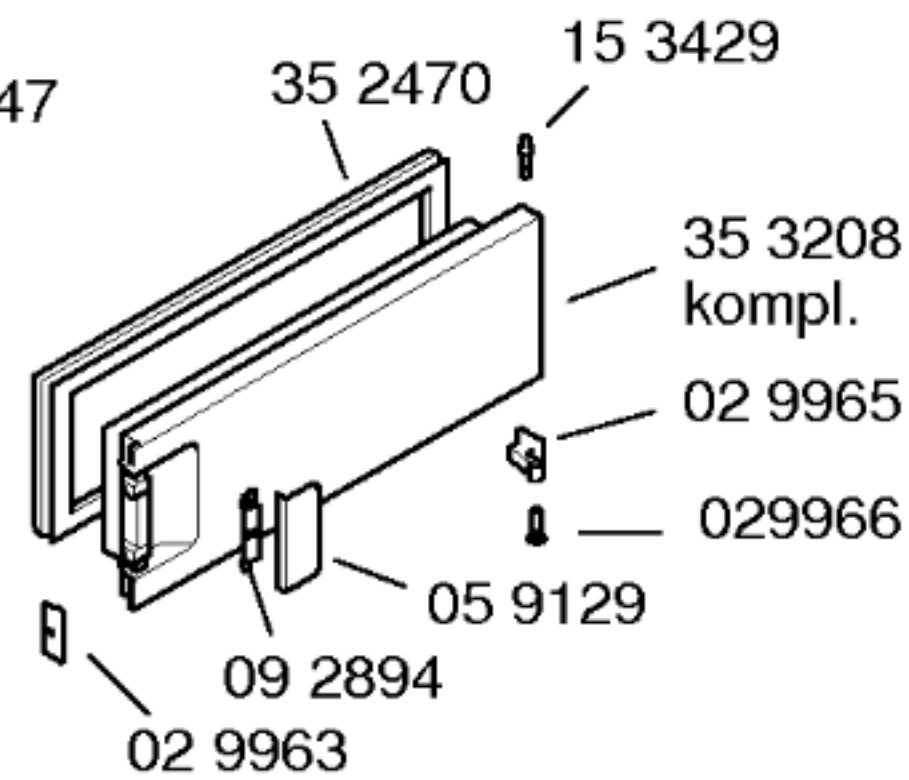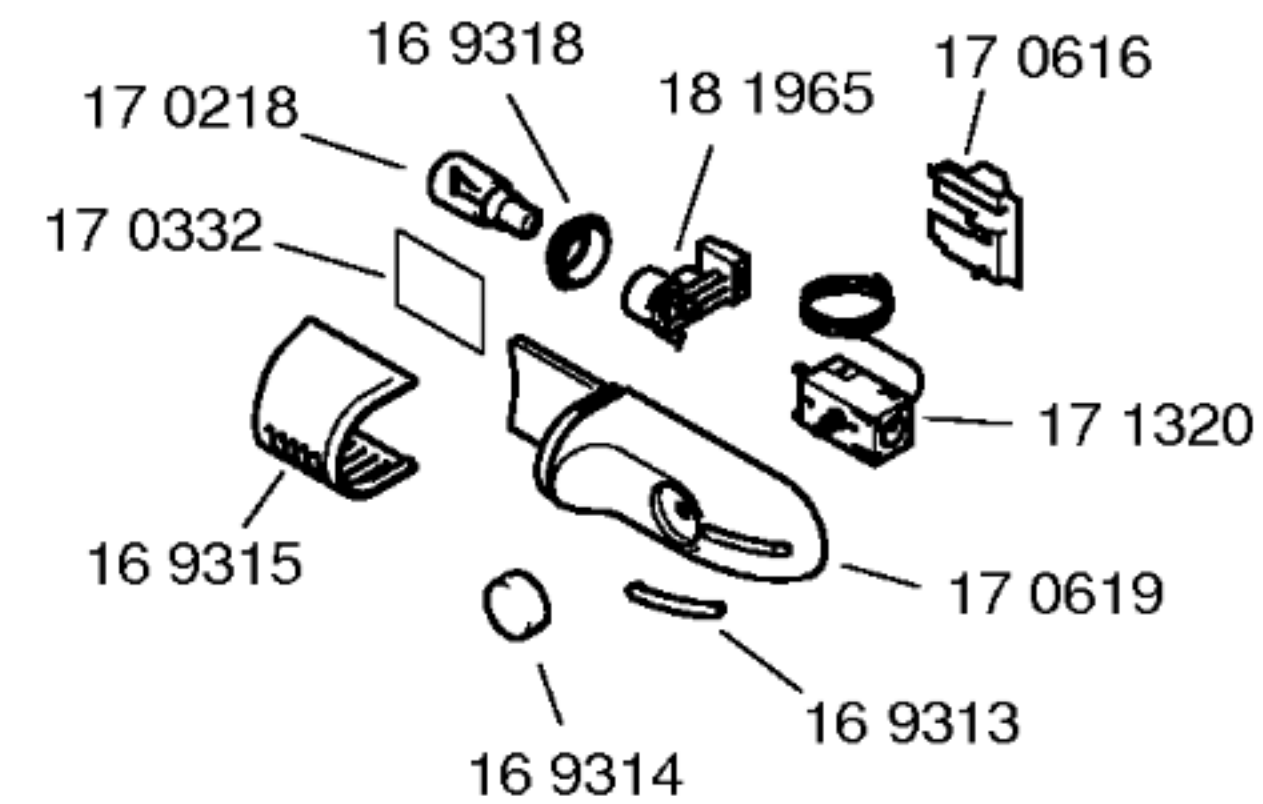

23 5128


09 3110




Mat. - Nr. - Konstante
3740

Gebrauchsanweisung
58 6318
(DE, EN, FR, IT, NL, DA)
Montageanleitung
52 3227
(DE, EN, FR, IT, NL, DA
NO, FI, SE, TR)

Beistellsatz
49 1368

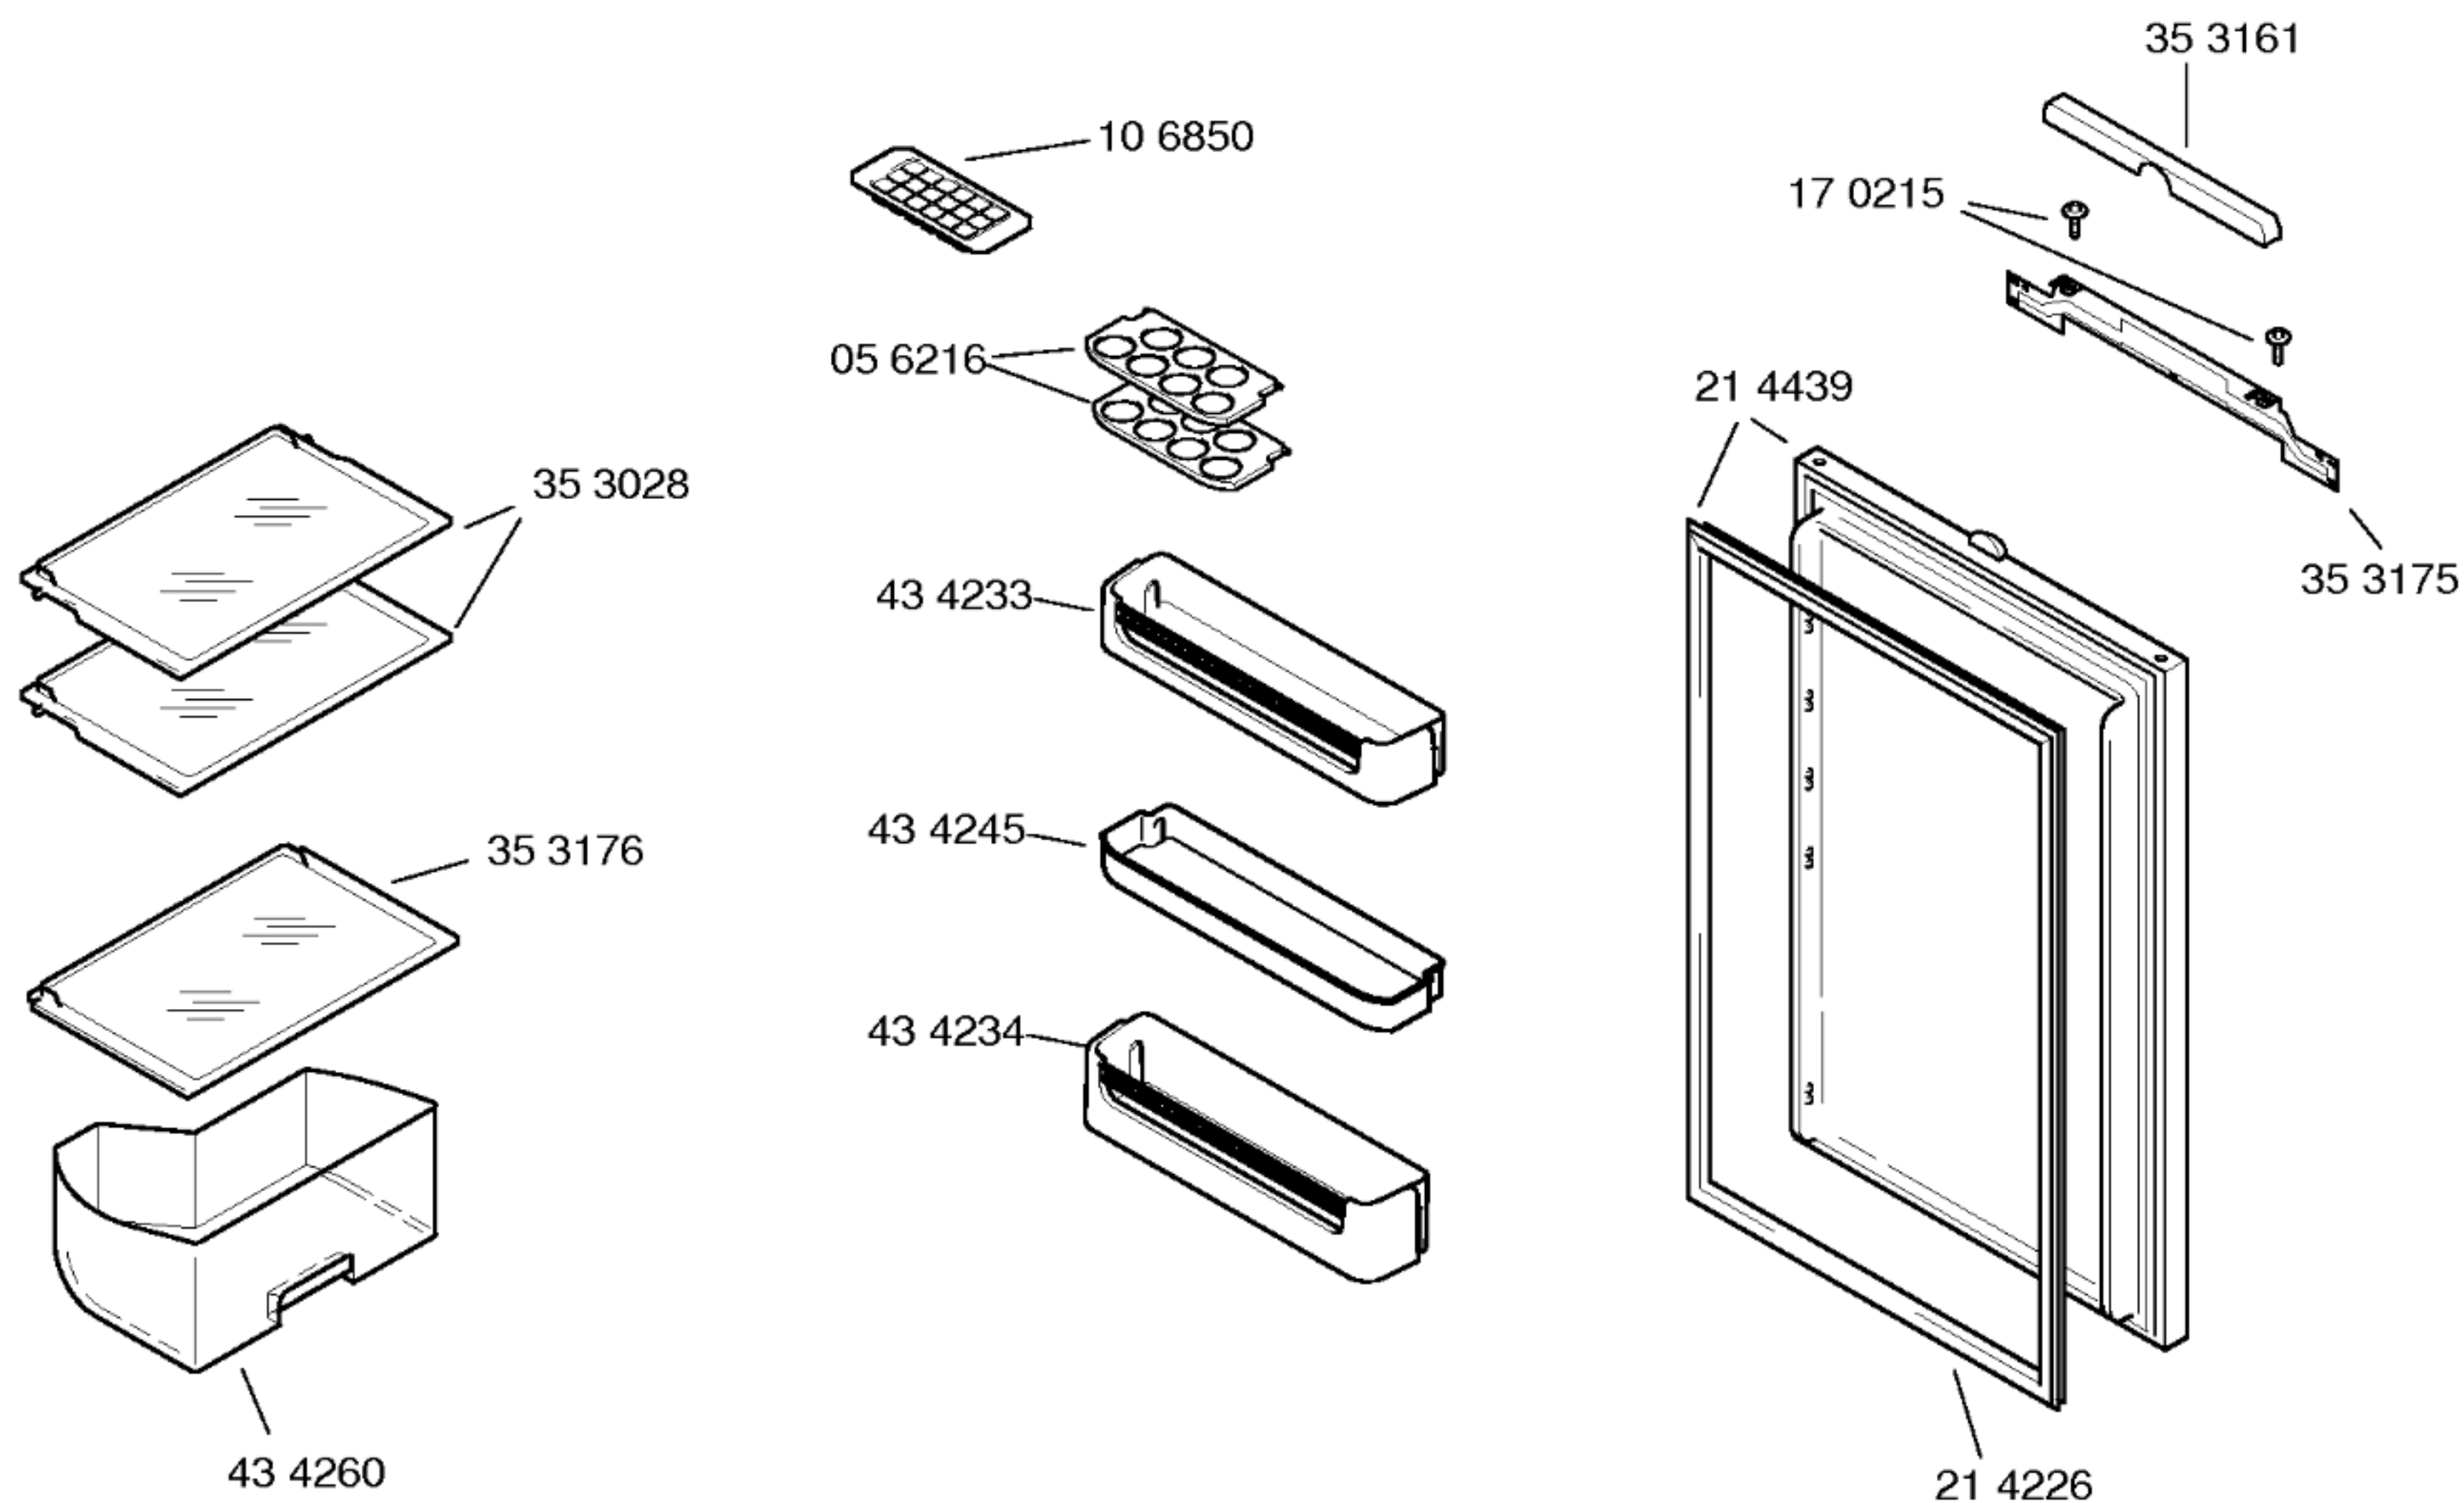

Mat. – Nr. – Konstante
3740

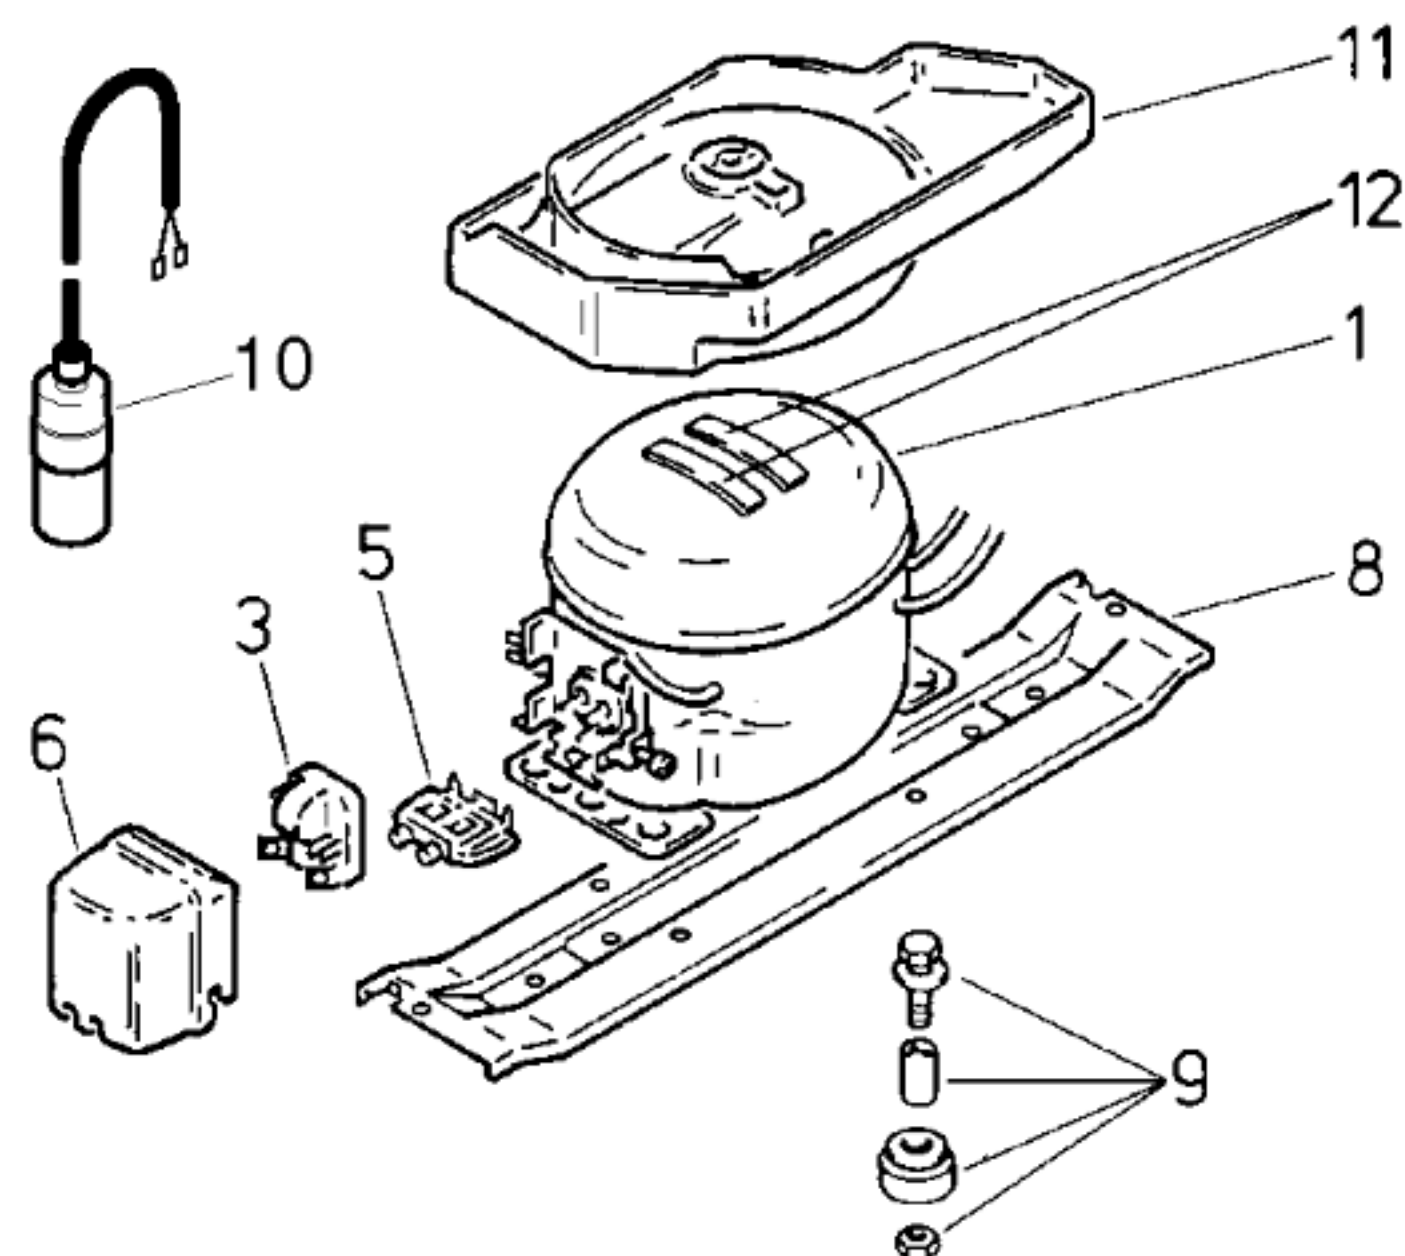Mat. – Nr. – Konstante
3740

	V01	V02	
Pos.	Goldstar	Goldstar	
	NDA69NAEM	TLY6KK2	
1	14 3810	142058	
2			
3	17 0743	151055	
4			
5	17 0745	150760	
6	17 0744	151072	
7	16 9319	16 9319	
8	26 4879	26 4879	
9	0 50166	0 50166	
10			
11	36 5099	36 5099	
12	05 6008	05 6008	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES			
Verdichter/Compressor/Compresseur	Goldstar	Danfoss	
Typ/Type	NDA69NAEM	TLY6KK2	
Förderleistung/Delivery/Débit	1242	1026	
Anlaufstrom/Starting current/Cour de démarrage	A	4,4	
Widerstand/Resistance/Résistance	Ω	34,0	
Hi/aux	Ω	41,0	
Temp.–Regler/Thermostat	Ranco		
Typ/Type	K59		
Regelstellung/Position	kalt	warm	
Schaltwerte/Switching values	"warm"	+4,0	
Valeurs de commutation	"kalt"	+4,0	
	"alarm"	–12,0	
Füllmenge/Fill.quantity/Charge	R600a	*	
Anschlußwert/Conn.load/Puiss. connectée	W	68	63
Heizung/Heater/Chauffage			
Widerstand/Resistance/Résistance	Ω		
Leistung/Power/Puissance	W		
Ventilator/Blower/Ventilateur			
Widerstand/Resistance/Résistance	Ω		
Temp.–Regler/Thermostat			
Magnetventil/Magnetic valve/Electrovanne			
Widerstand/Resistance/Résistance	Ω		
Spannung/Voltage/Tension	V		

* siehe Typenschild