




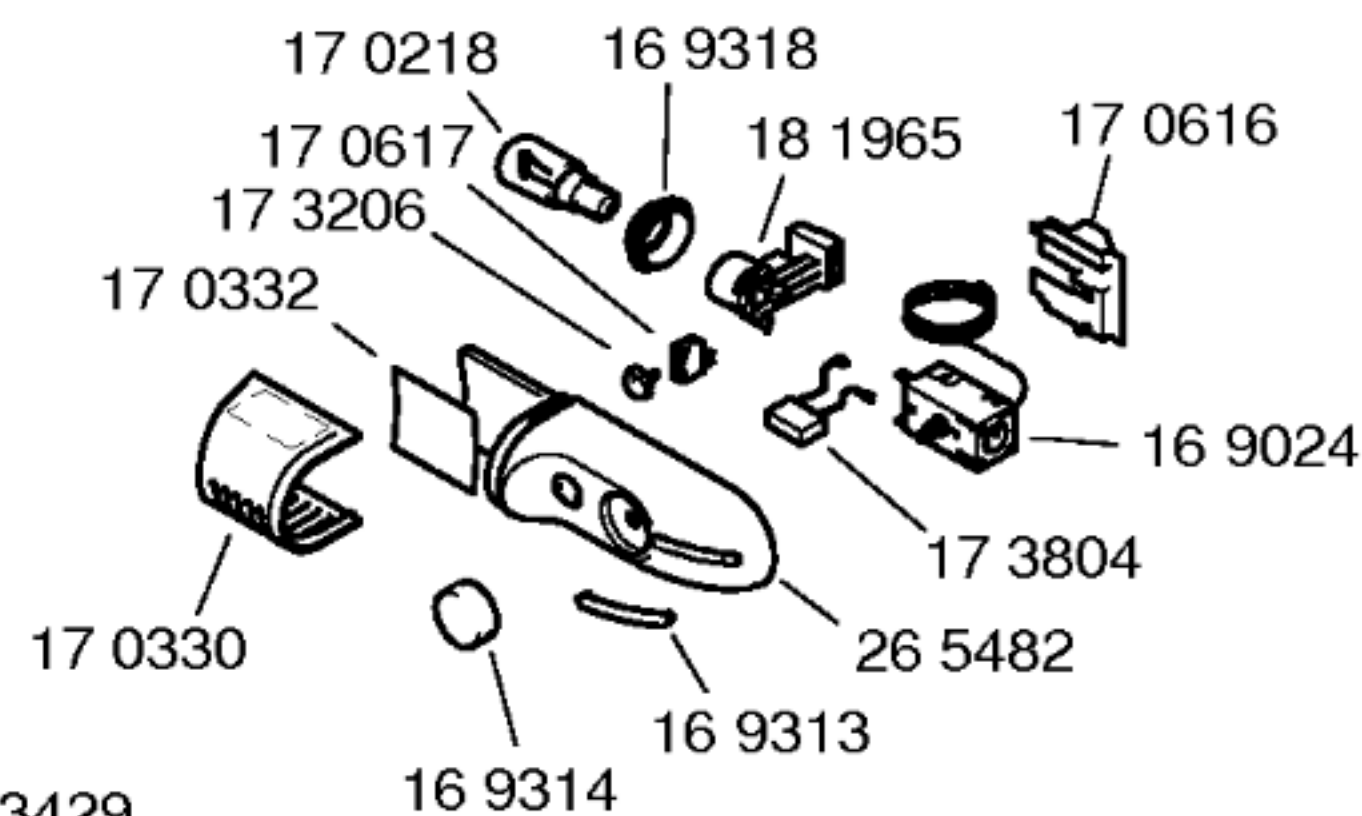


07 4445
V01
09 6325
V02

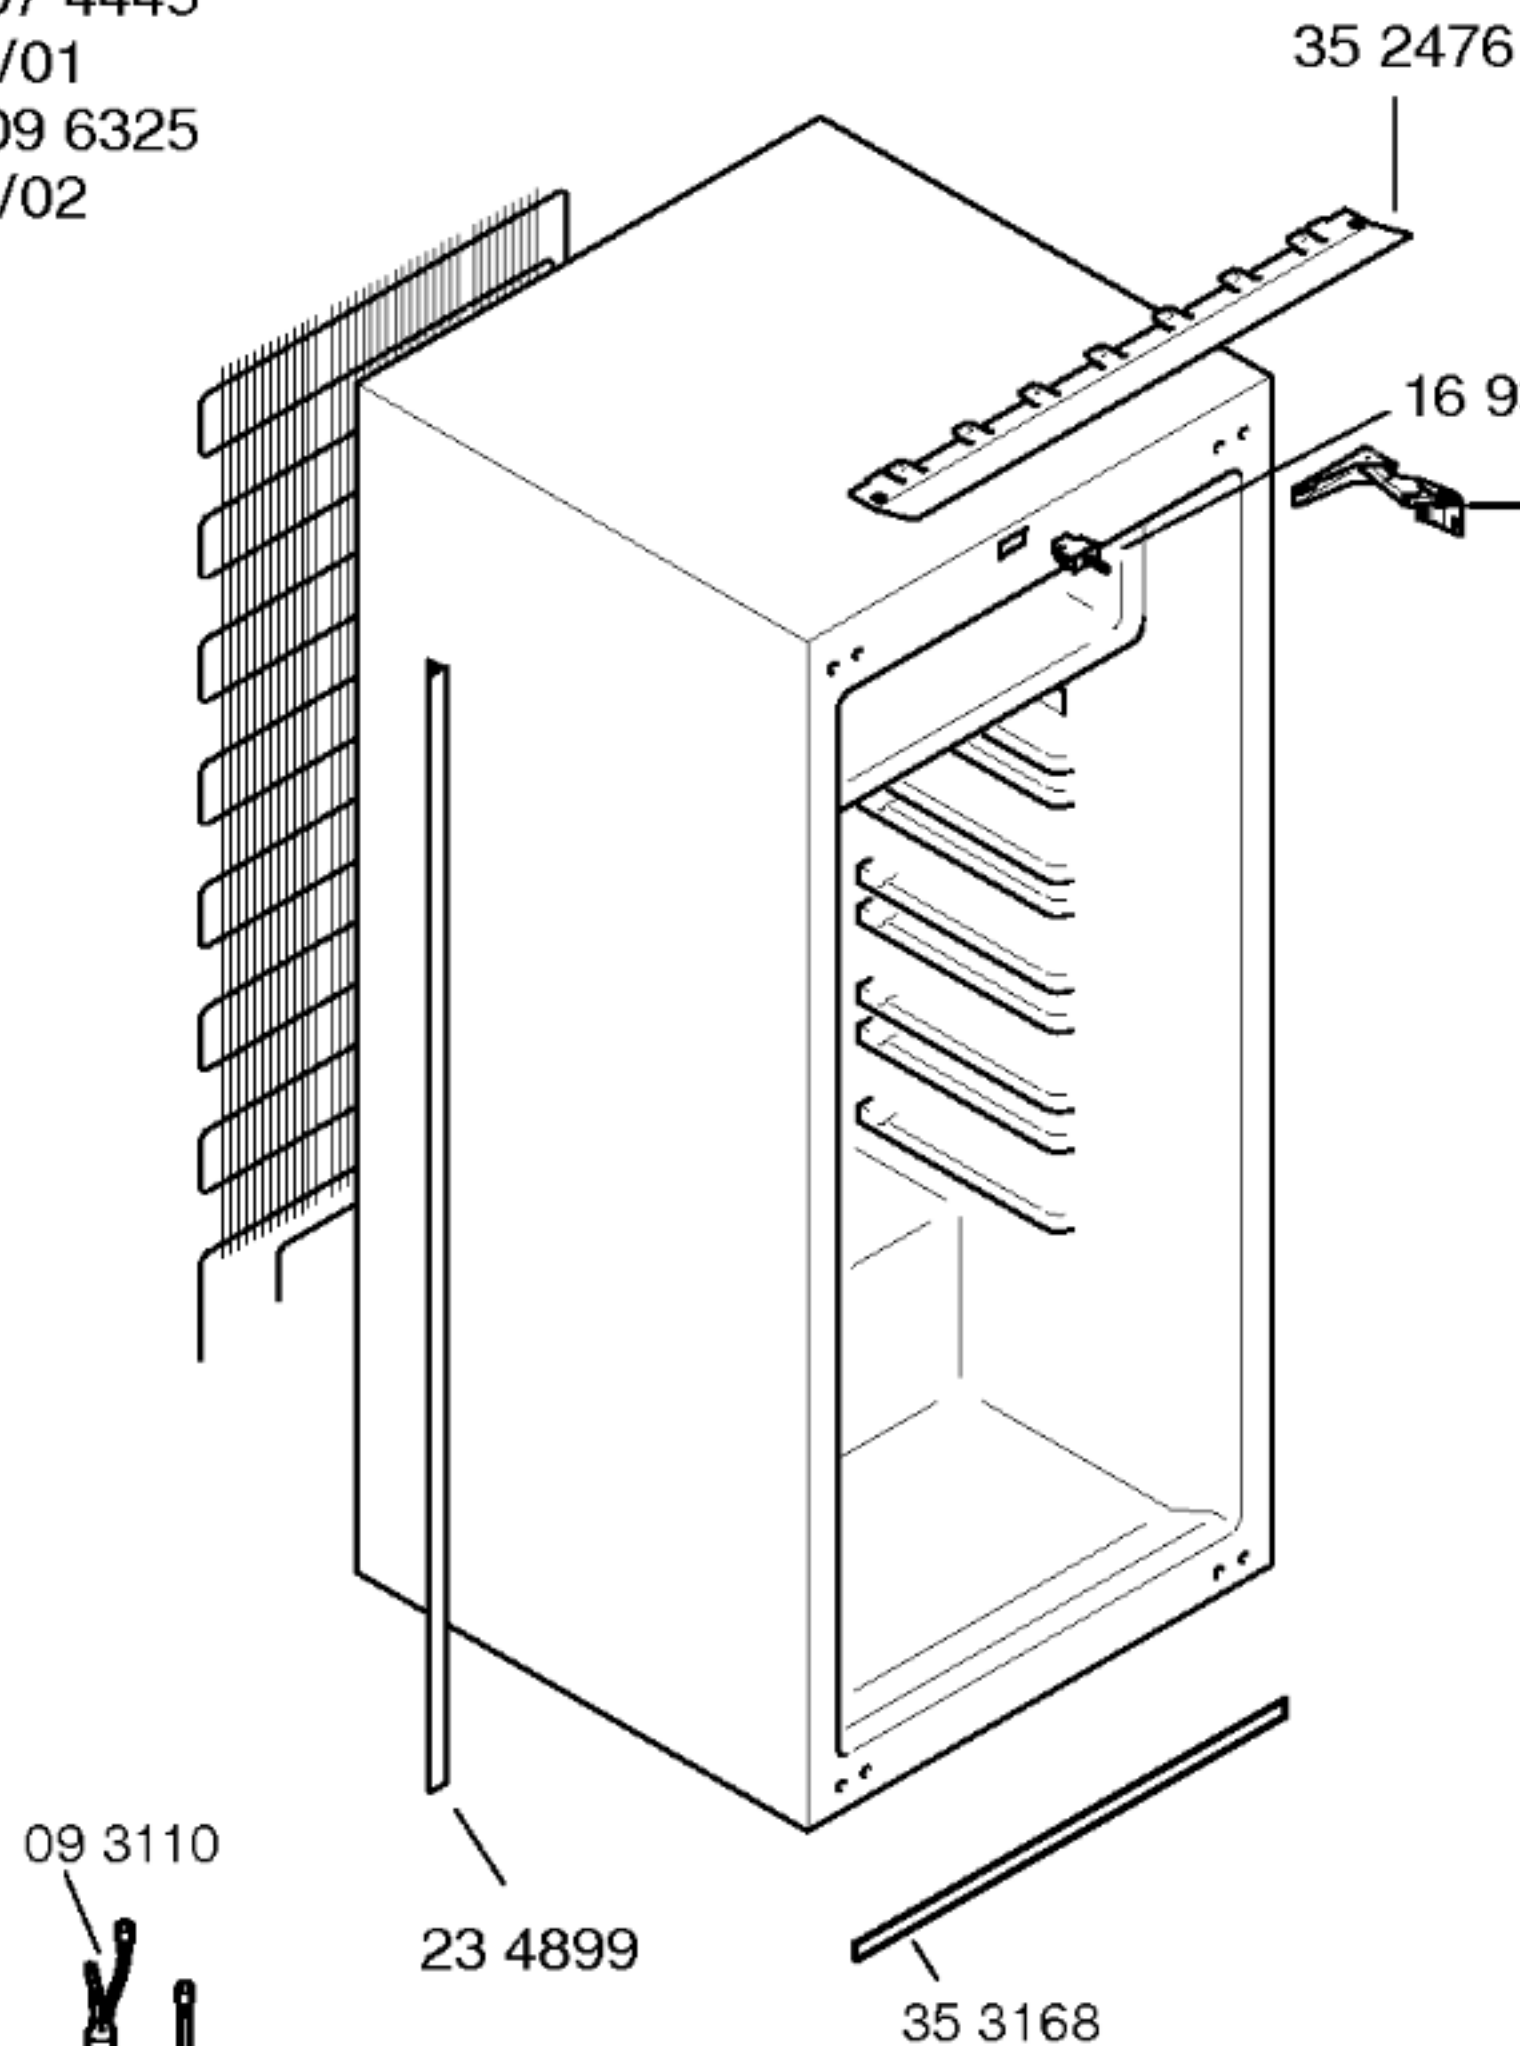

Gebrauchsanweisung
59 0295
(de,en,fr,it,nl)
Montageanleitung
58 8057
Beistellsatz
26 5163

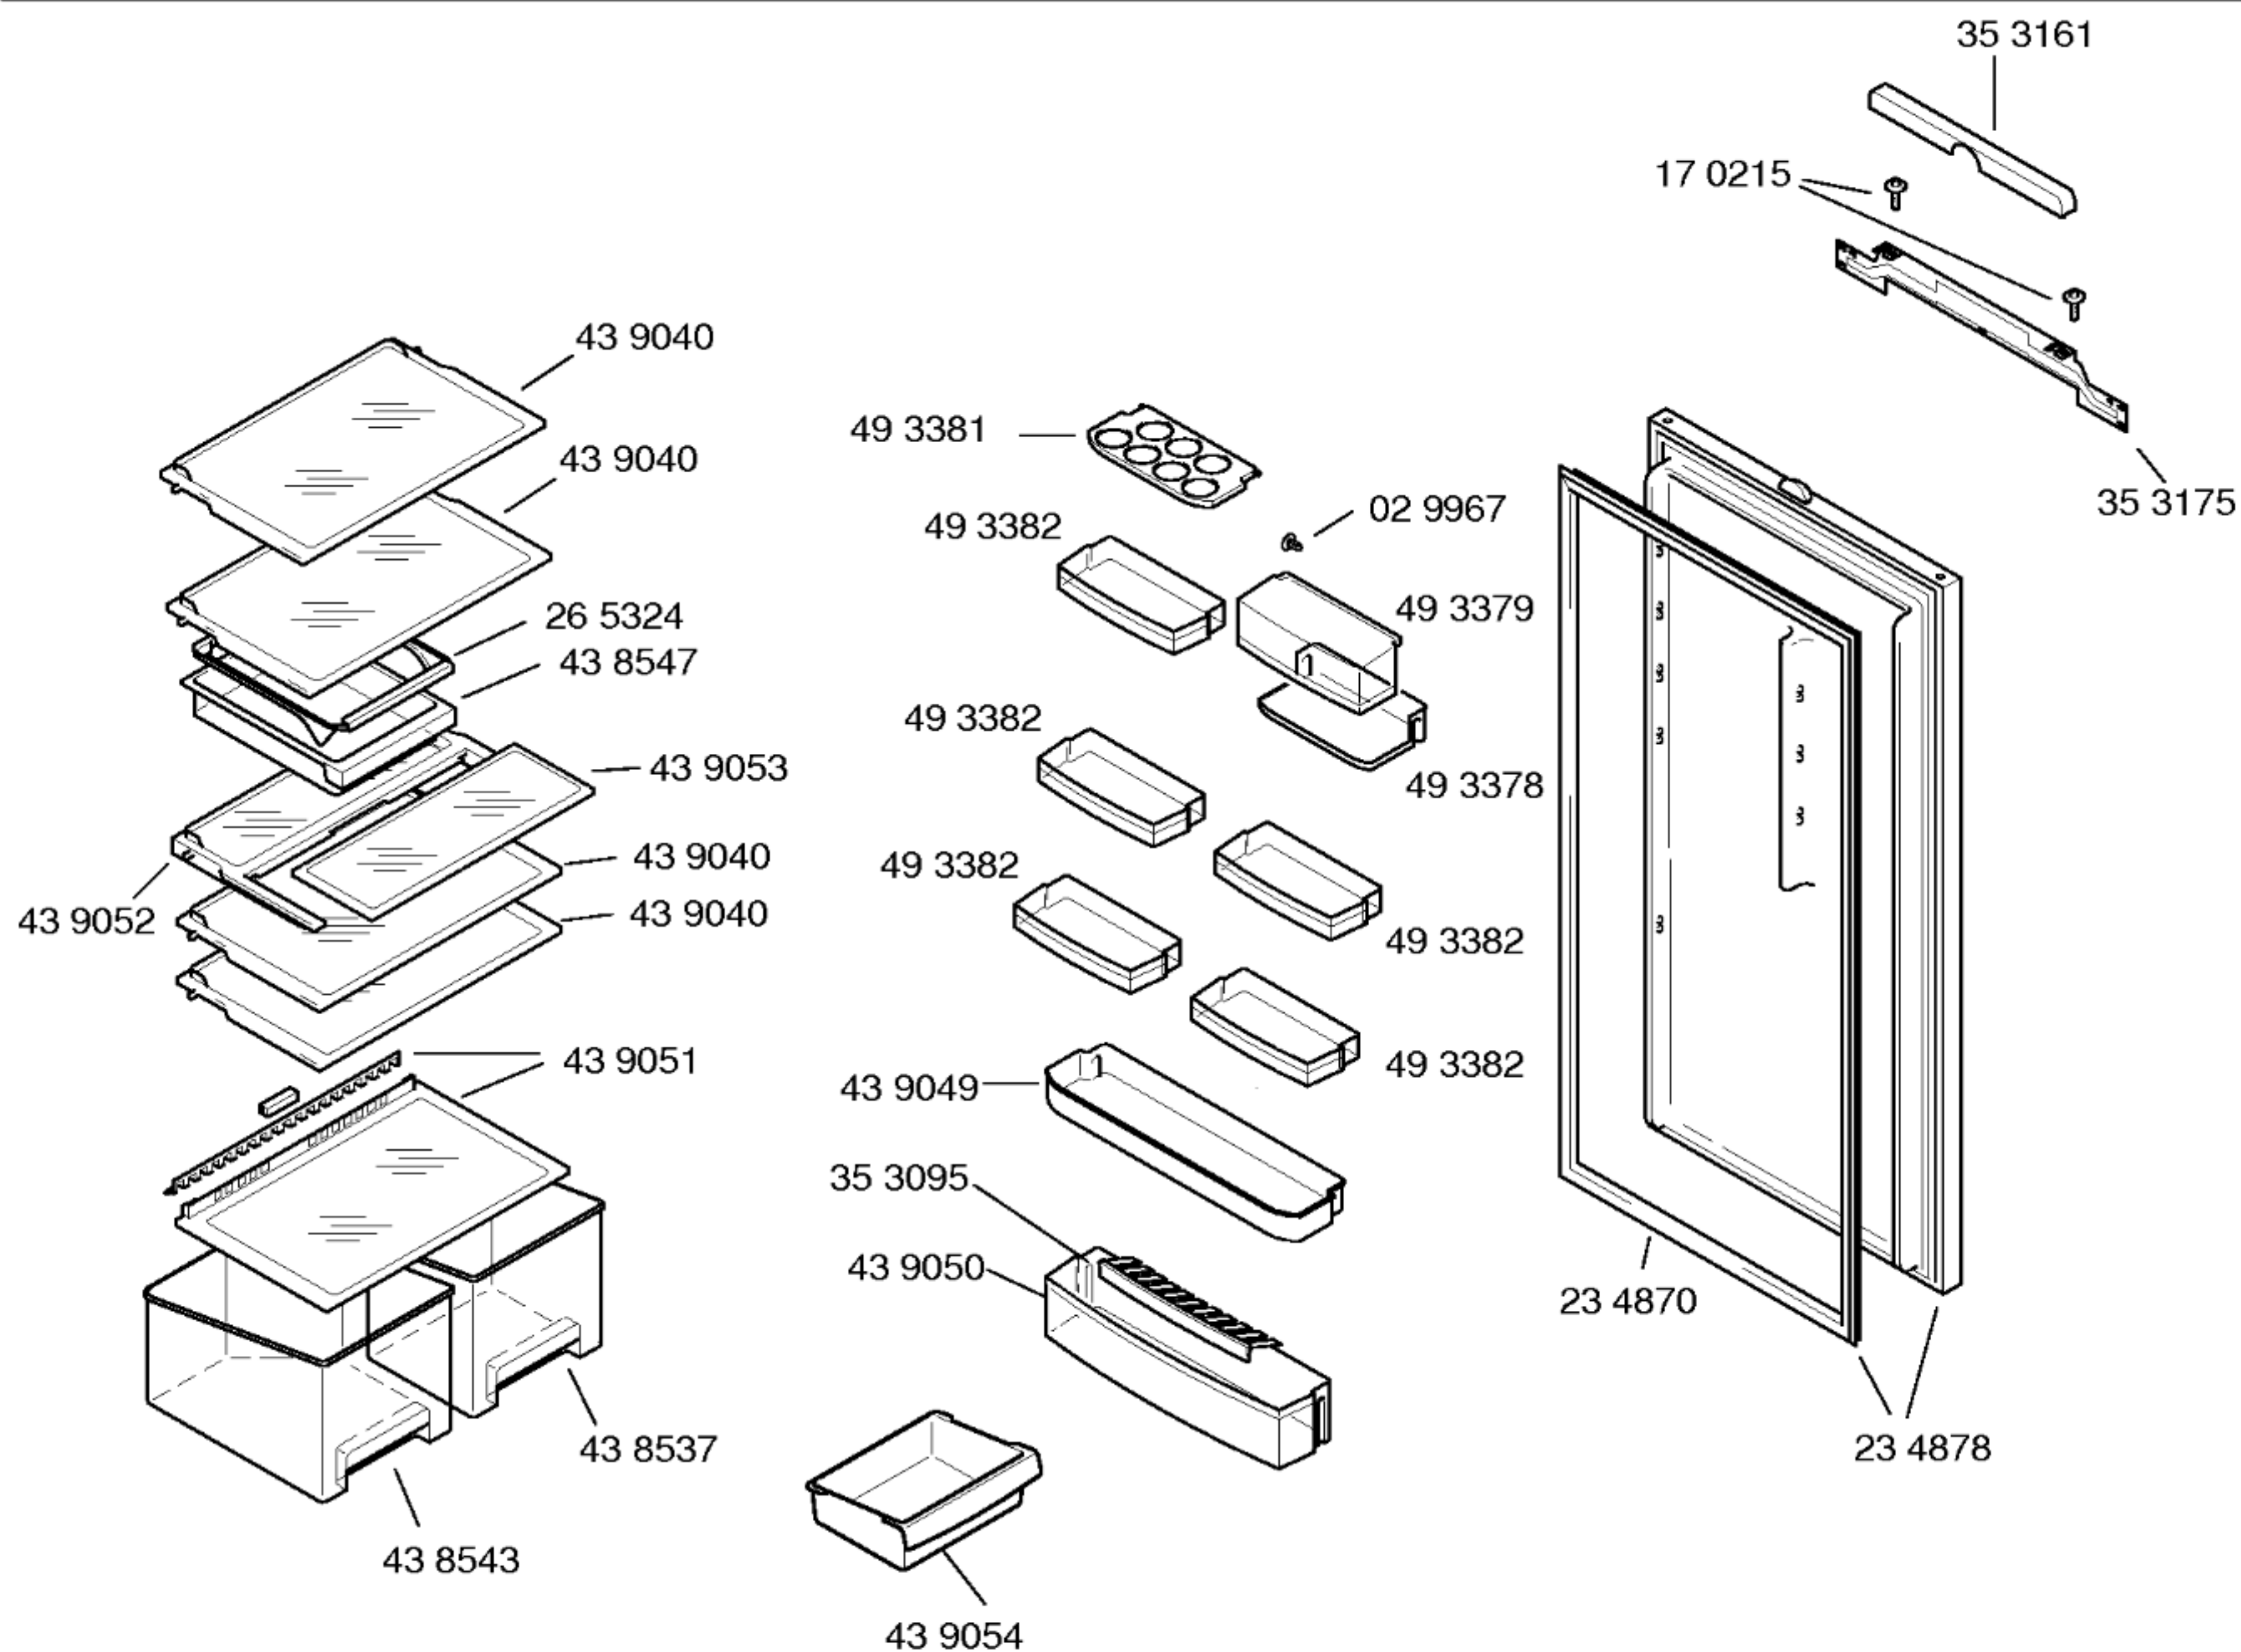

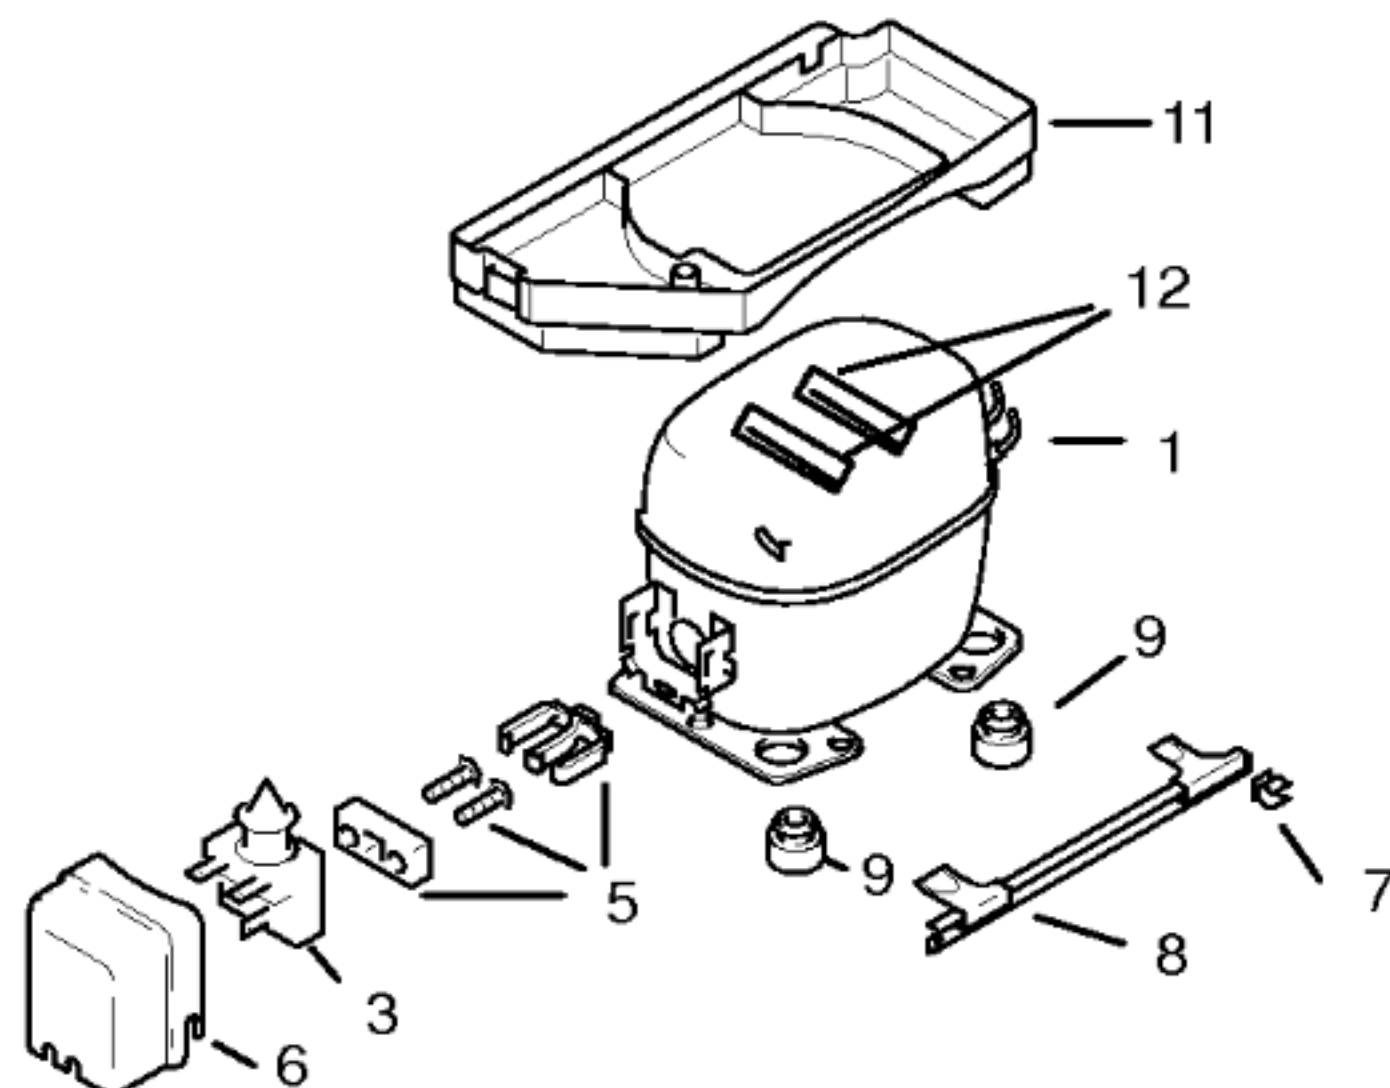

	V01,V02	V03	
	Goldstar	Danfoss	
Pos.	NDA69NAEM	TLY7KK2	
1	14 2206	14 2259	
2			
3	17 0743	15 1055	
4			
5	17 0745	15 0760	
6	17 0744	15 1072	
7	16 9319	16 9319	
8	26 4879	26 4879	
9	05 0166	05 0166	
10			
11	36 5099	36 5099	
12			

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES			
Verdichter/Compressor/Compresseur	Goldstar	Danfoss	
Typ/Type	NDA52NAEM	TLY7KK2	
Förderleistung/Delivery/Débit	l/h	934	
Anlaufstrom/Starting current/Cour de démarrage	A		
Widerstand/Resistance/Résistance Ha/main/prin	W	31,5	
Hi/aux	W	6,00	
Temp.-Regler/Thermostat	Ranco		
Typ/Type	K59		
Regelstellung/Position	kalt	warm	
Schaltwerte/Switching values	"warm"	+5,2	
Valeurs de commutation	"kalt"	-32,0	
	"alarm"	-15,0	
Füllmenge/Fill.quantity/Charge	R600a	+	
Anschlußwert/Conn.load/Puiss. connectée	W	58	
Heizung/Heater/Chauffage			
Widerstand/Resistance/Résistance	W		
Leistung/Power/Puissance	W		
Ventilator/Blower/Ventilateur			
Widerstand/Resistance/Résistance	W		
Temp.-Regler/Thermostat			
Magnetventil/Magnetic valve/Electrovanne			
Widerstand/Resistance/Résistance	W		
Spannung/Voltage/Tension	V		