


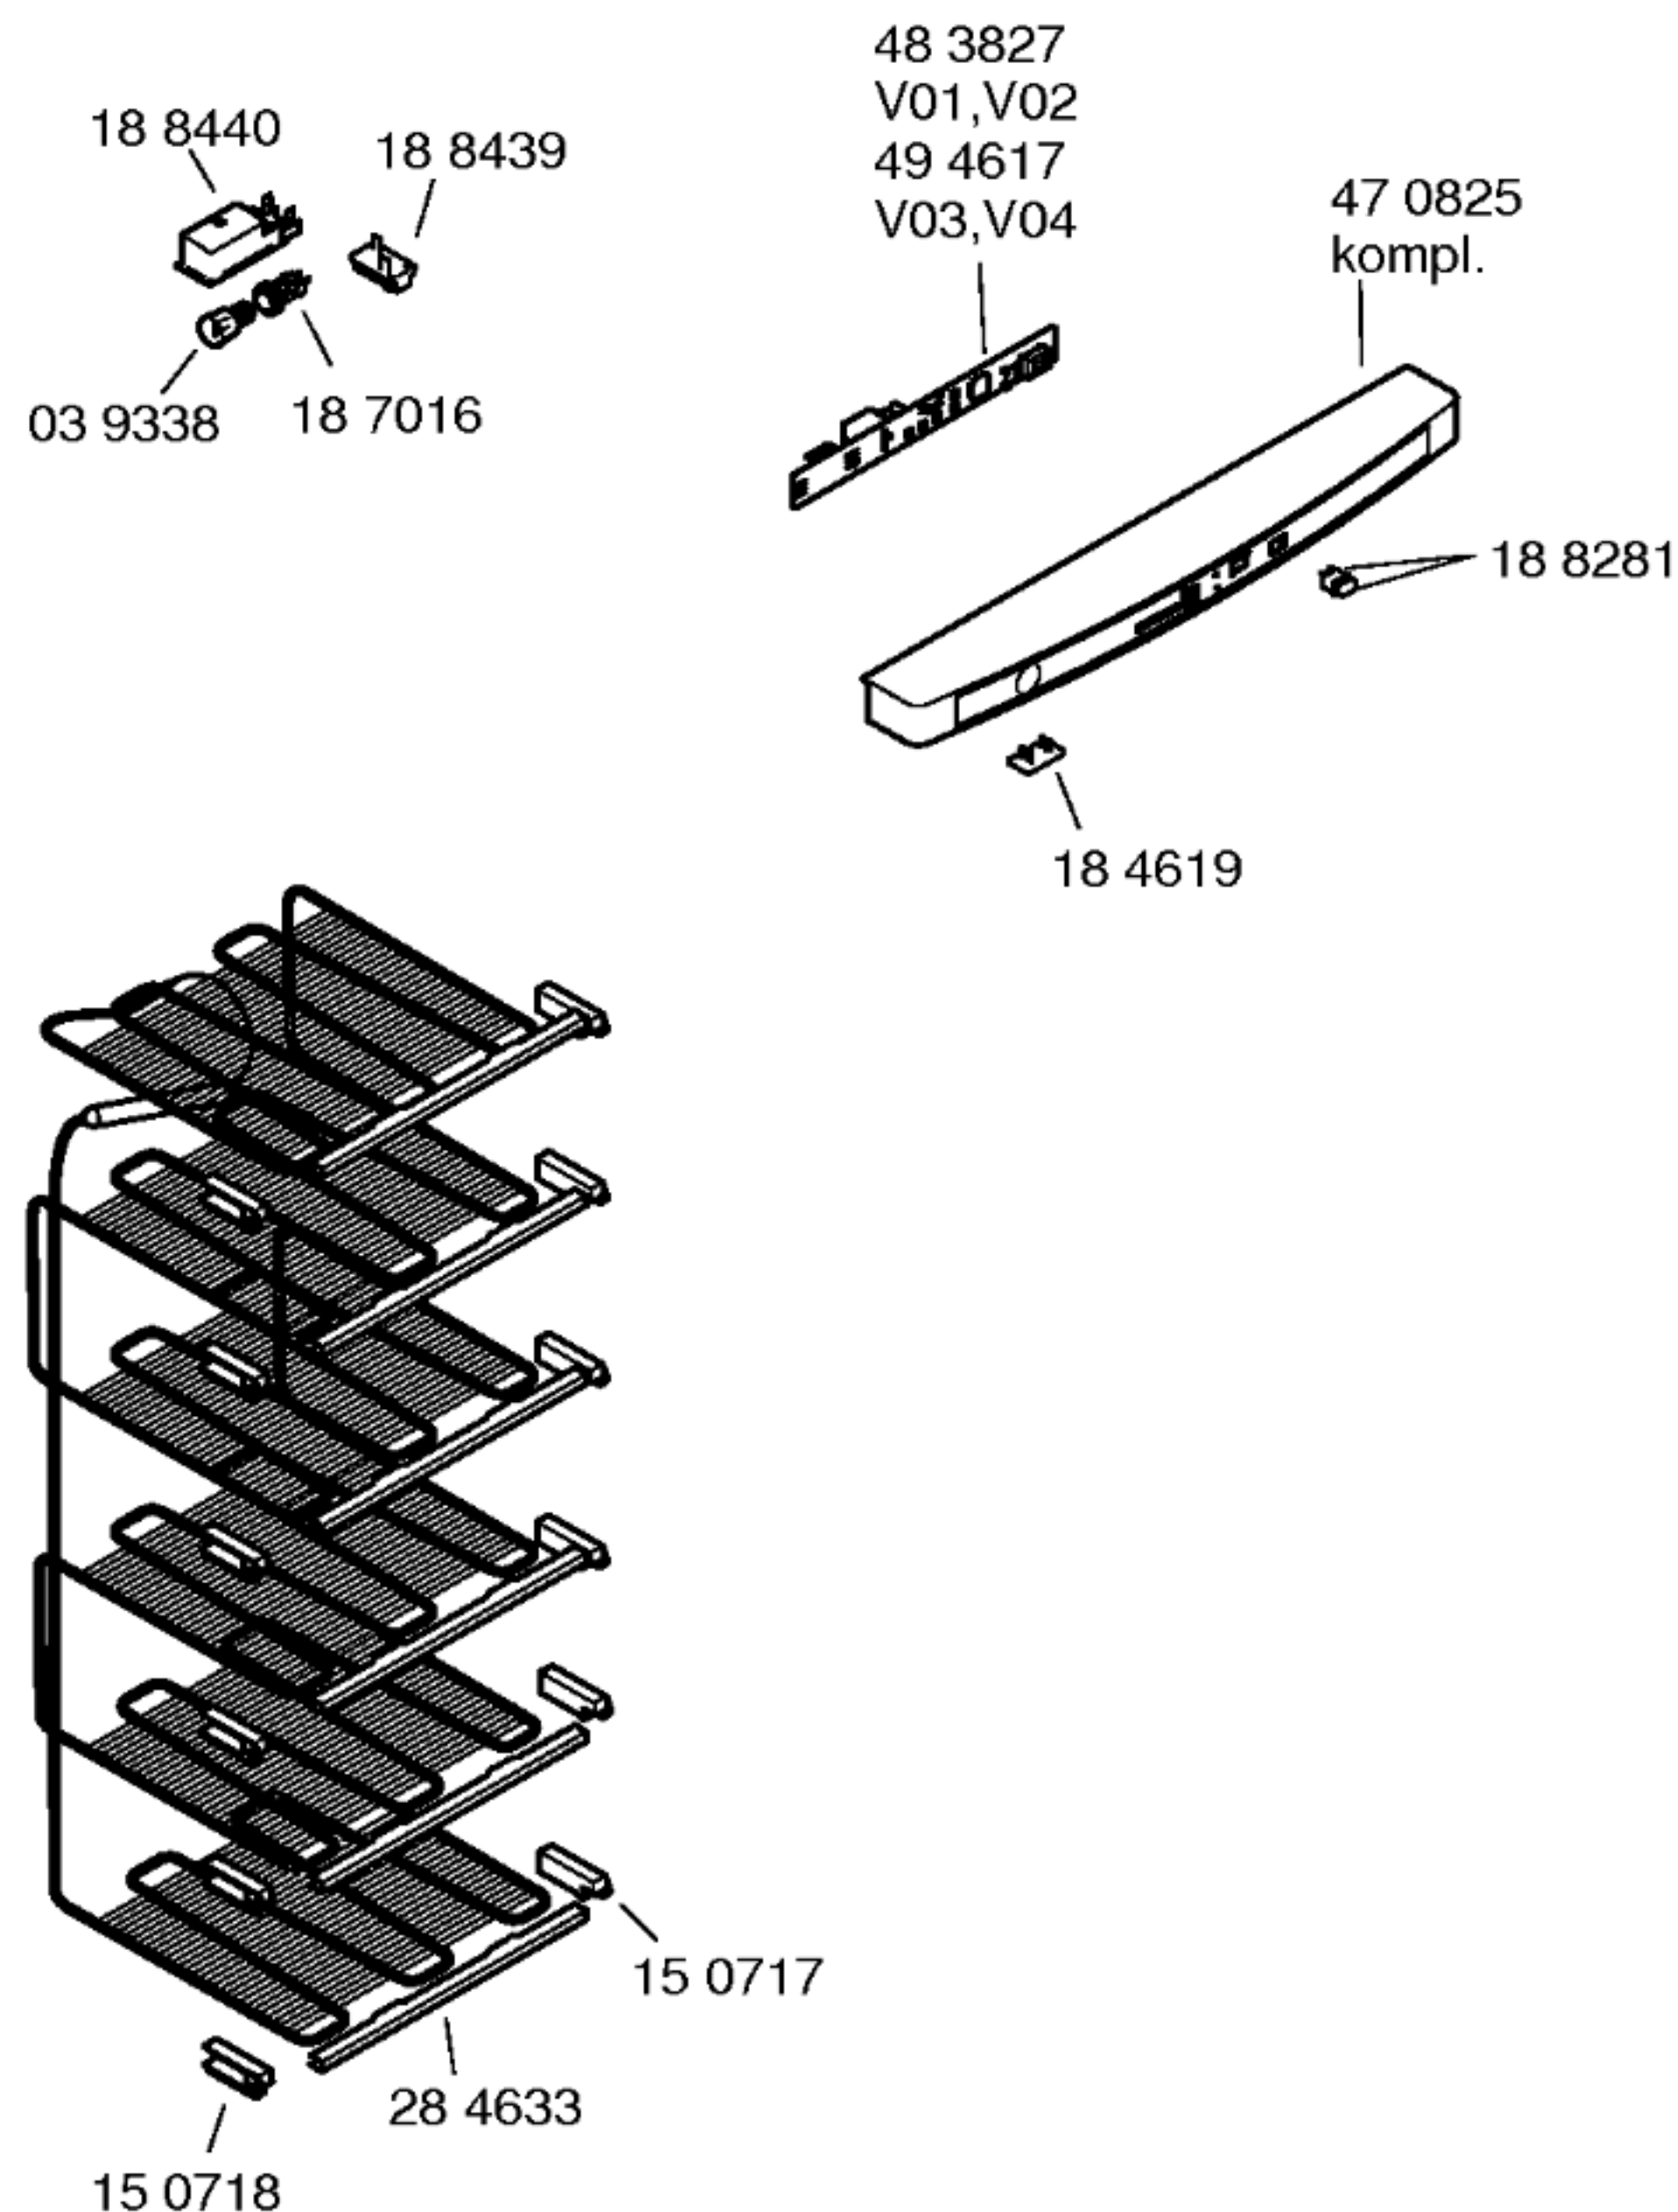
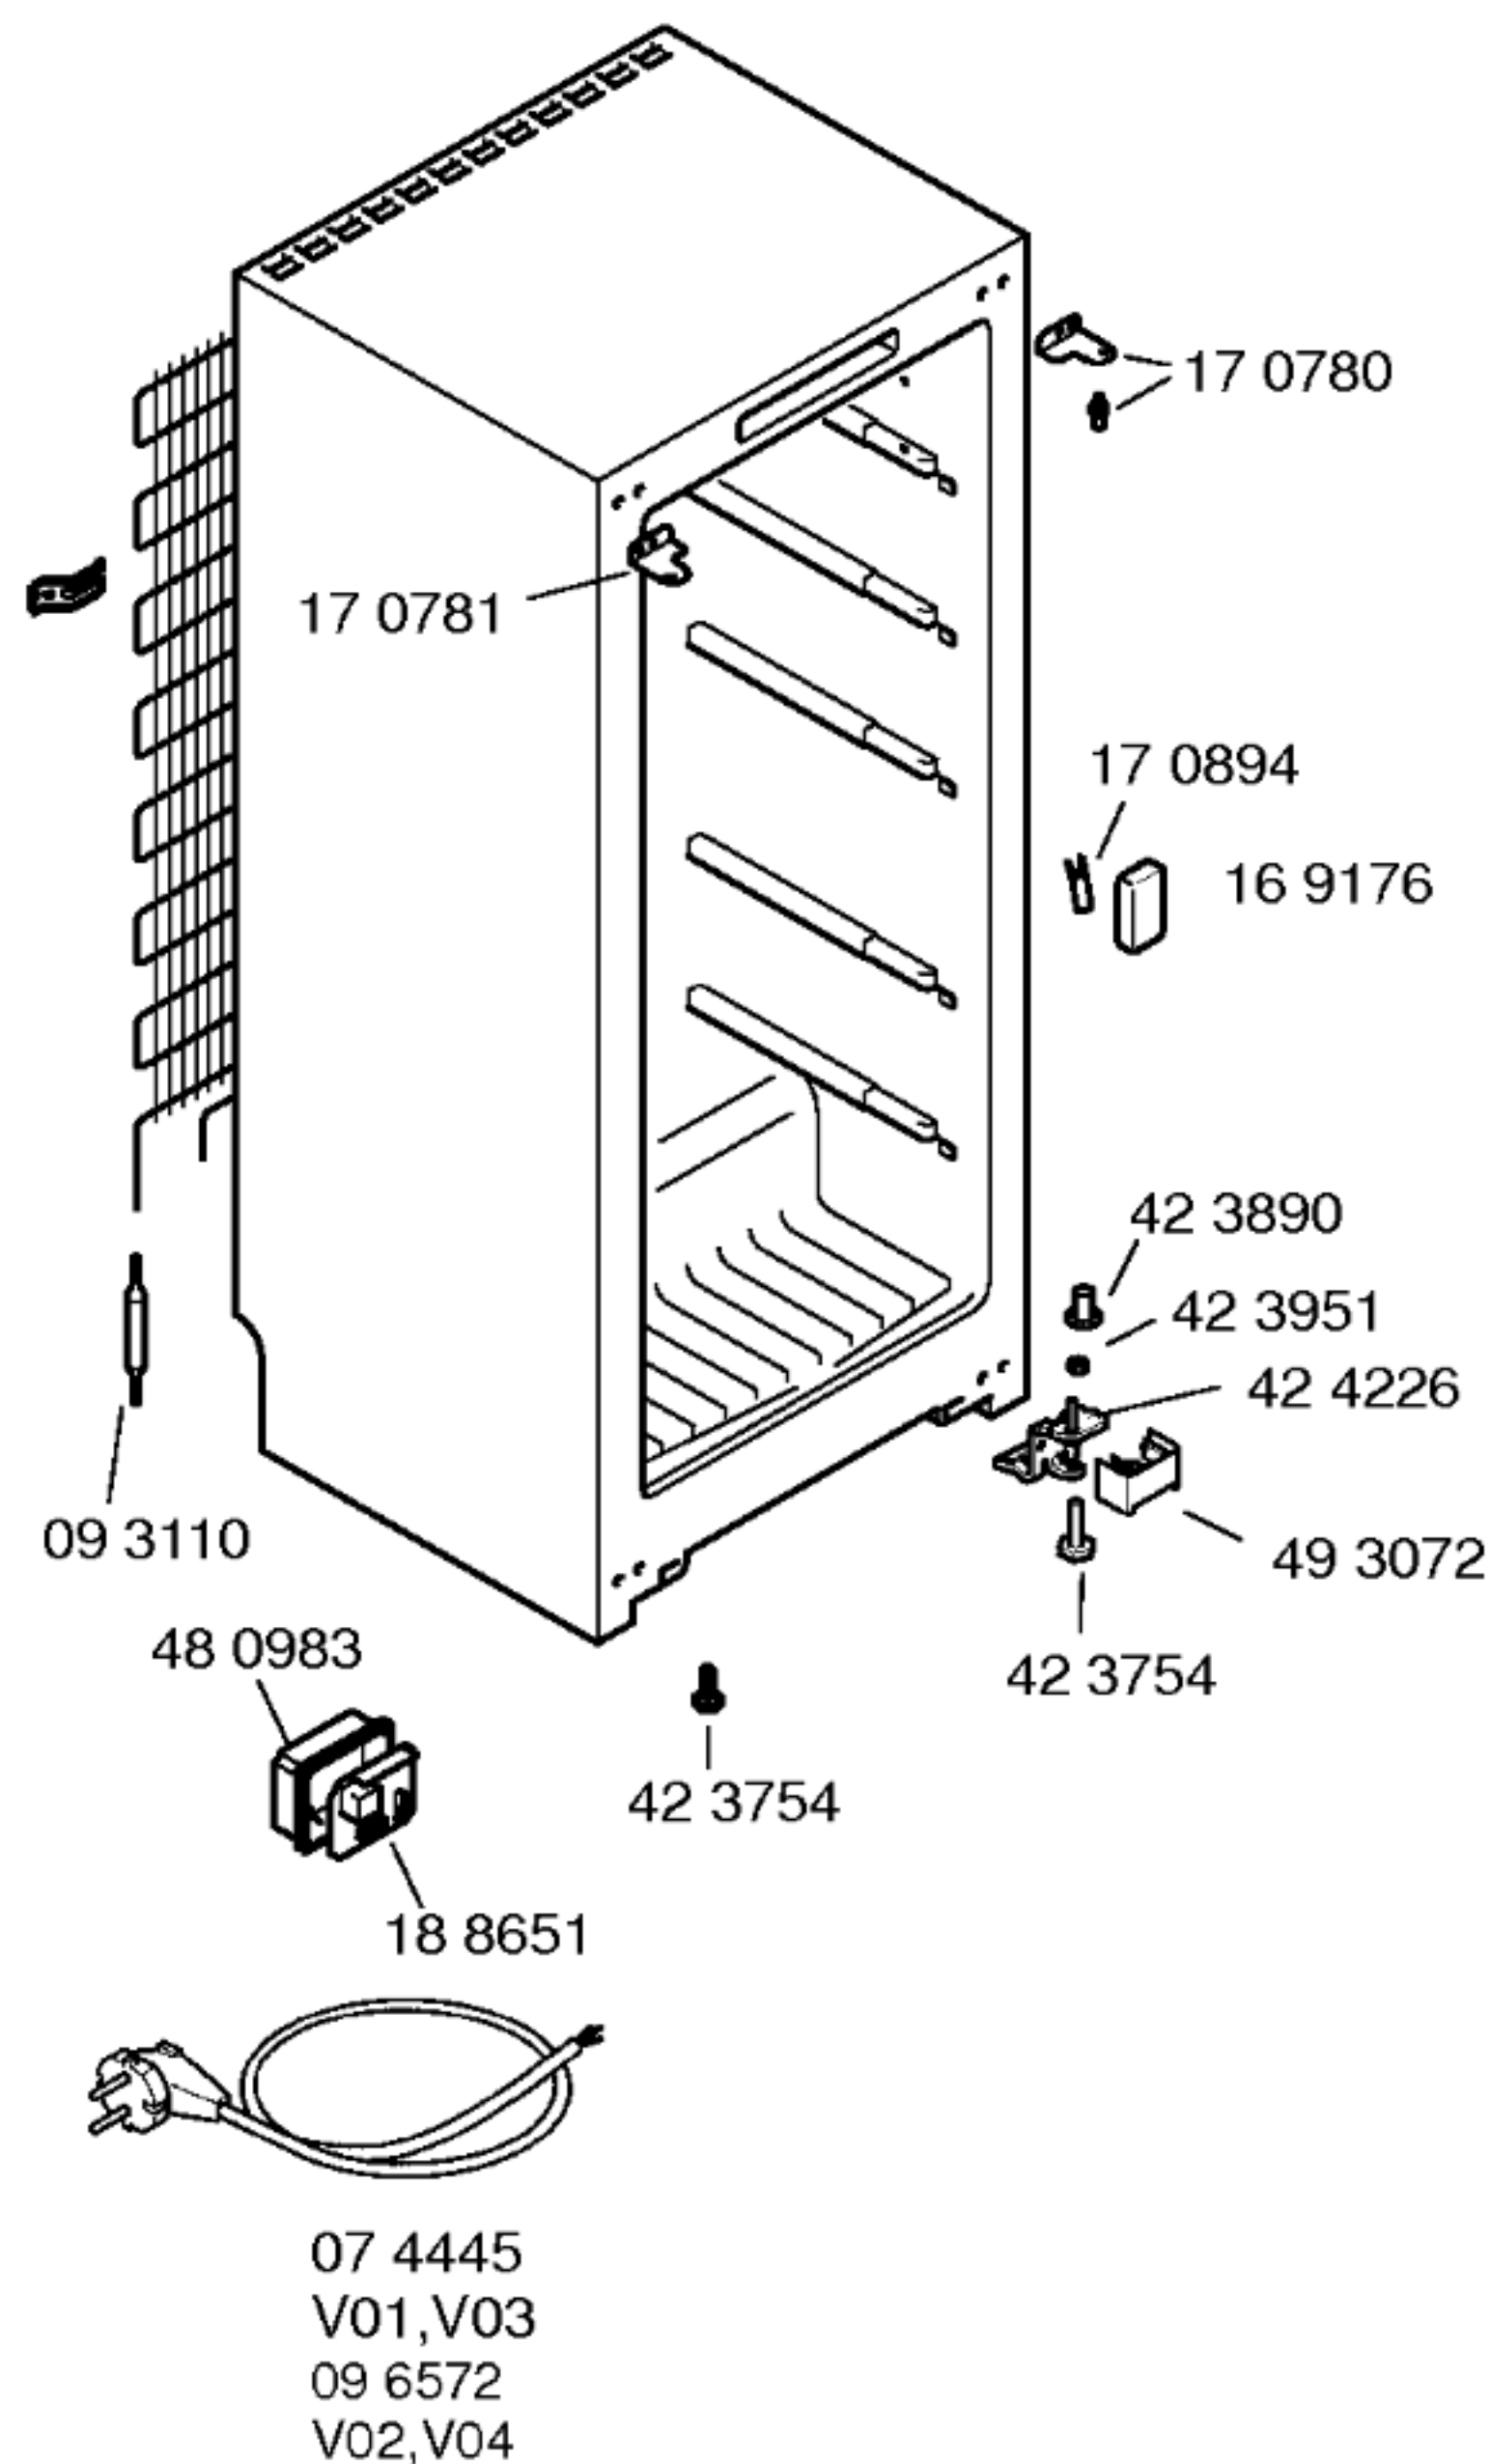
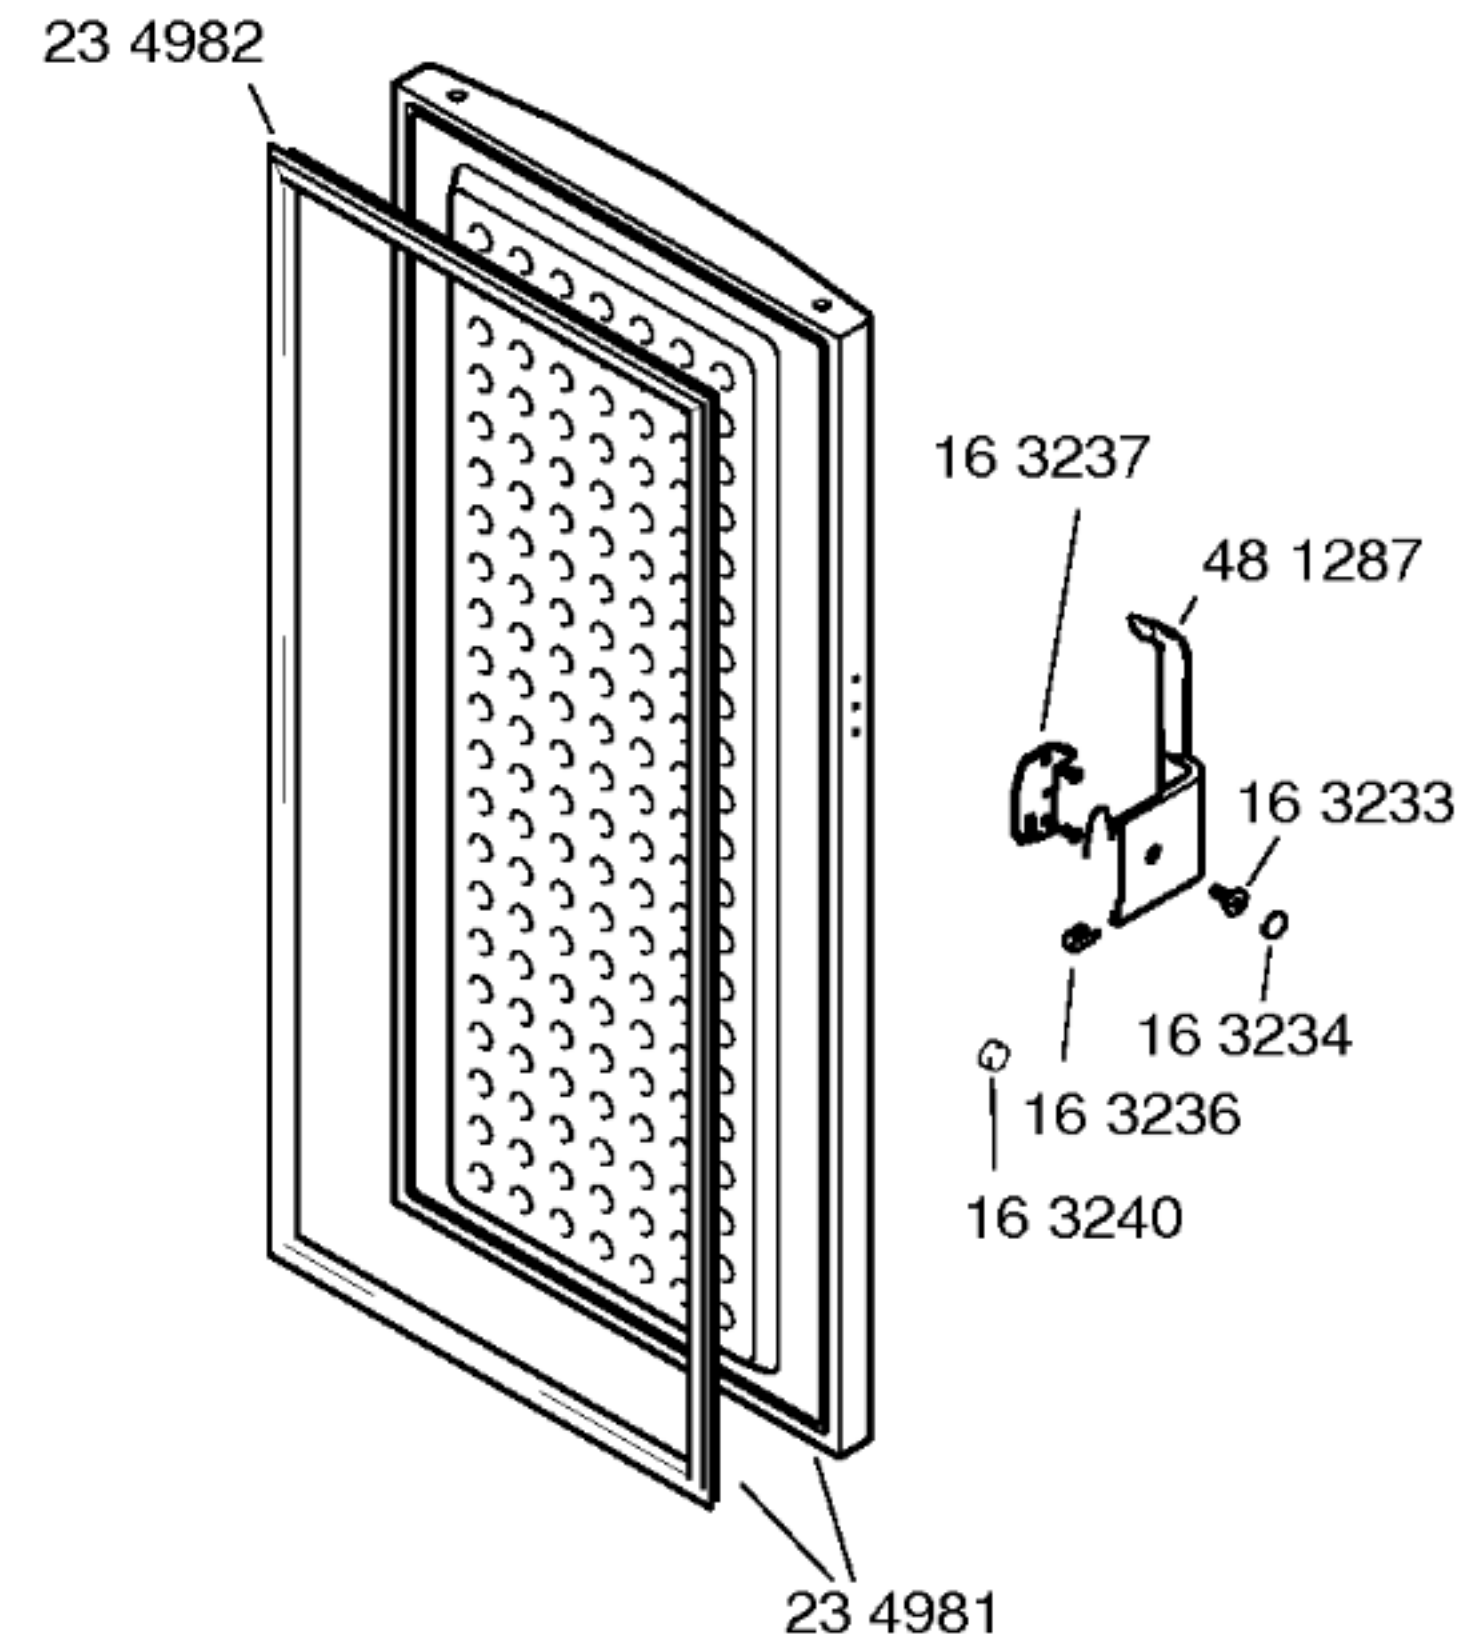


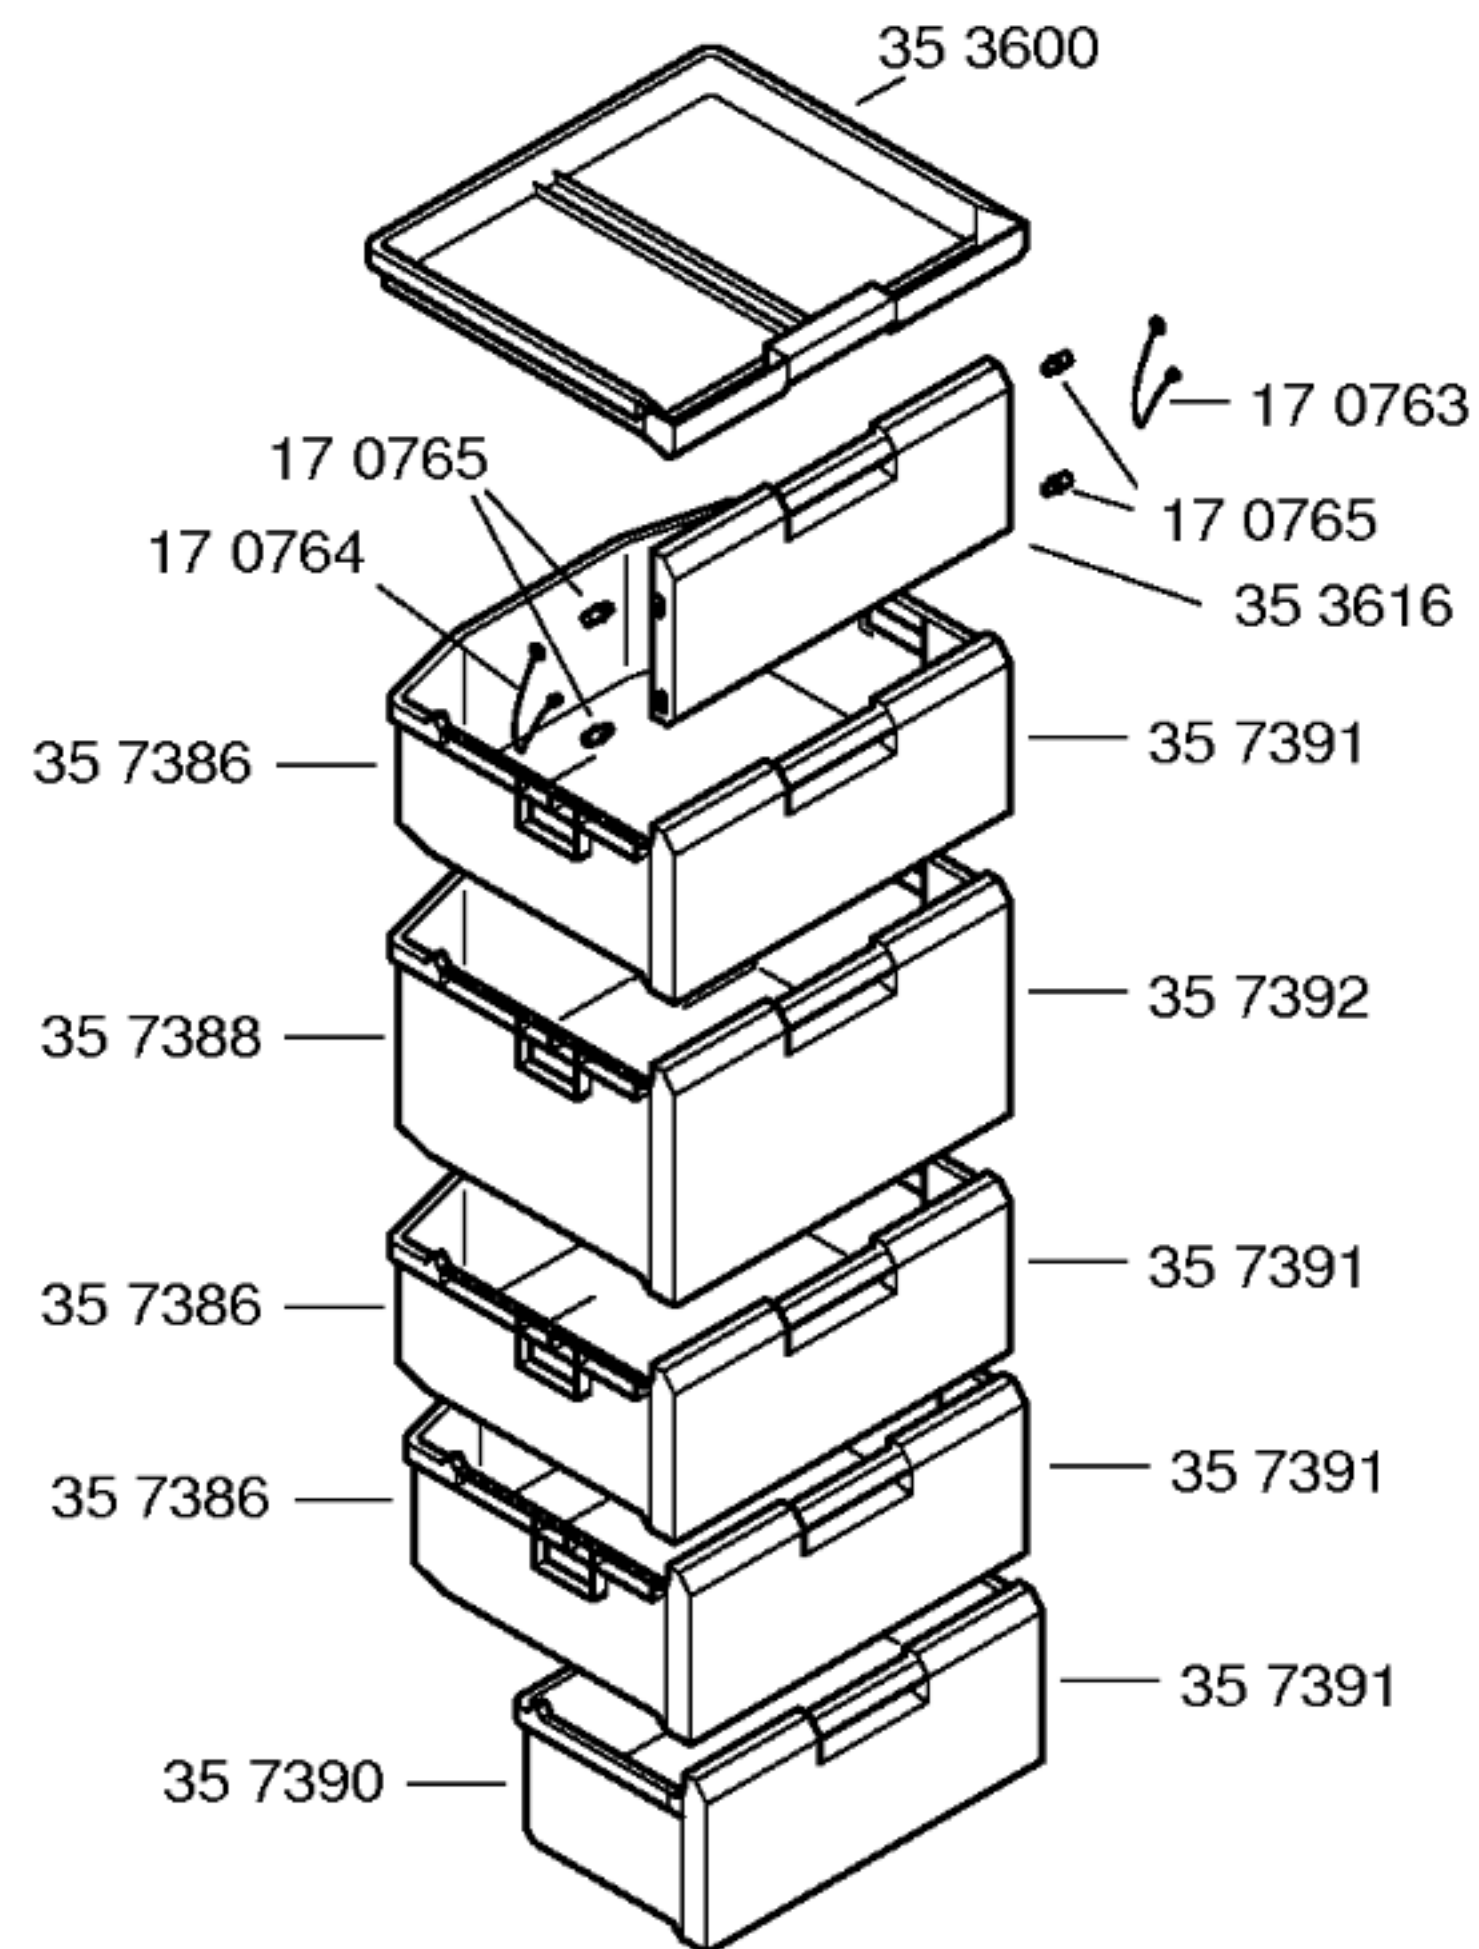

Gebrauchsanweisung
59 4040
(de,en,fr,it,nl)
Montageanleitung
58 9231
Beistellsatz
49 3072

Side by Side
Beistellsatz zu KSR/KSK
24 1531

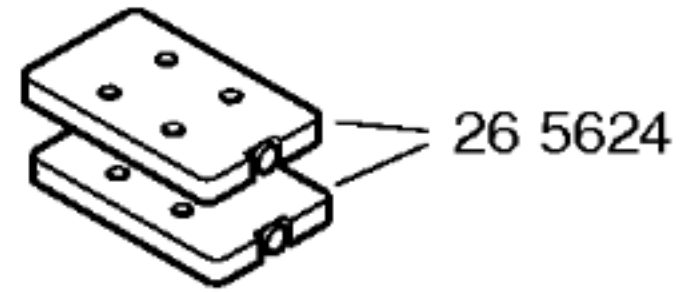

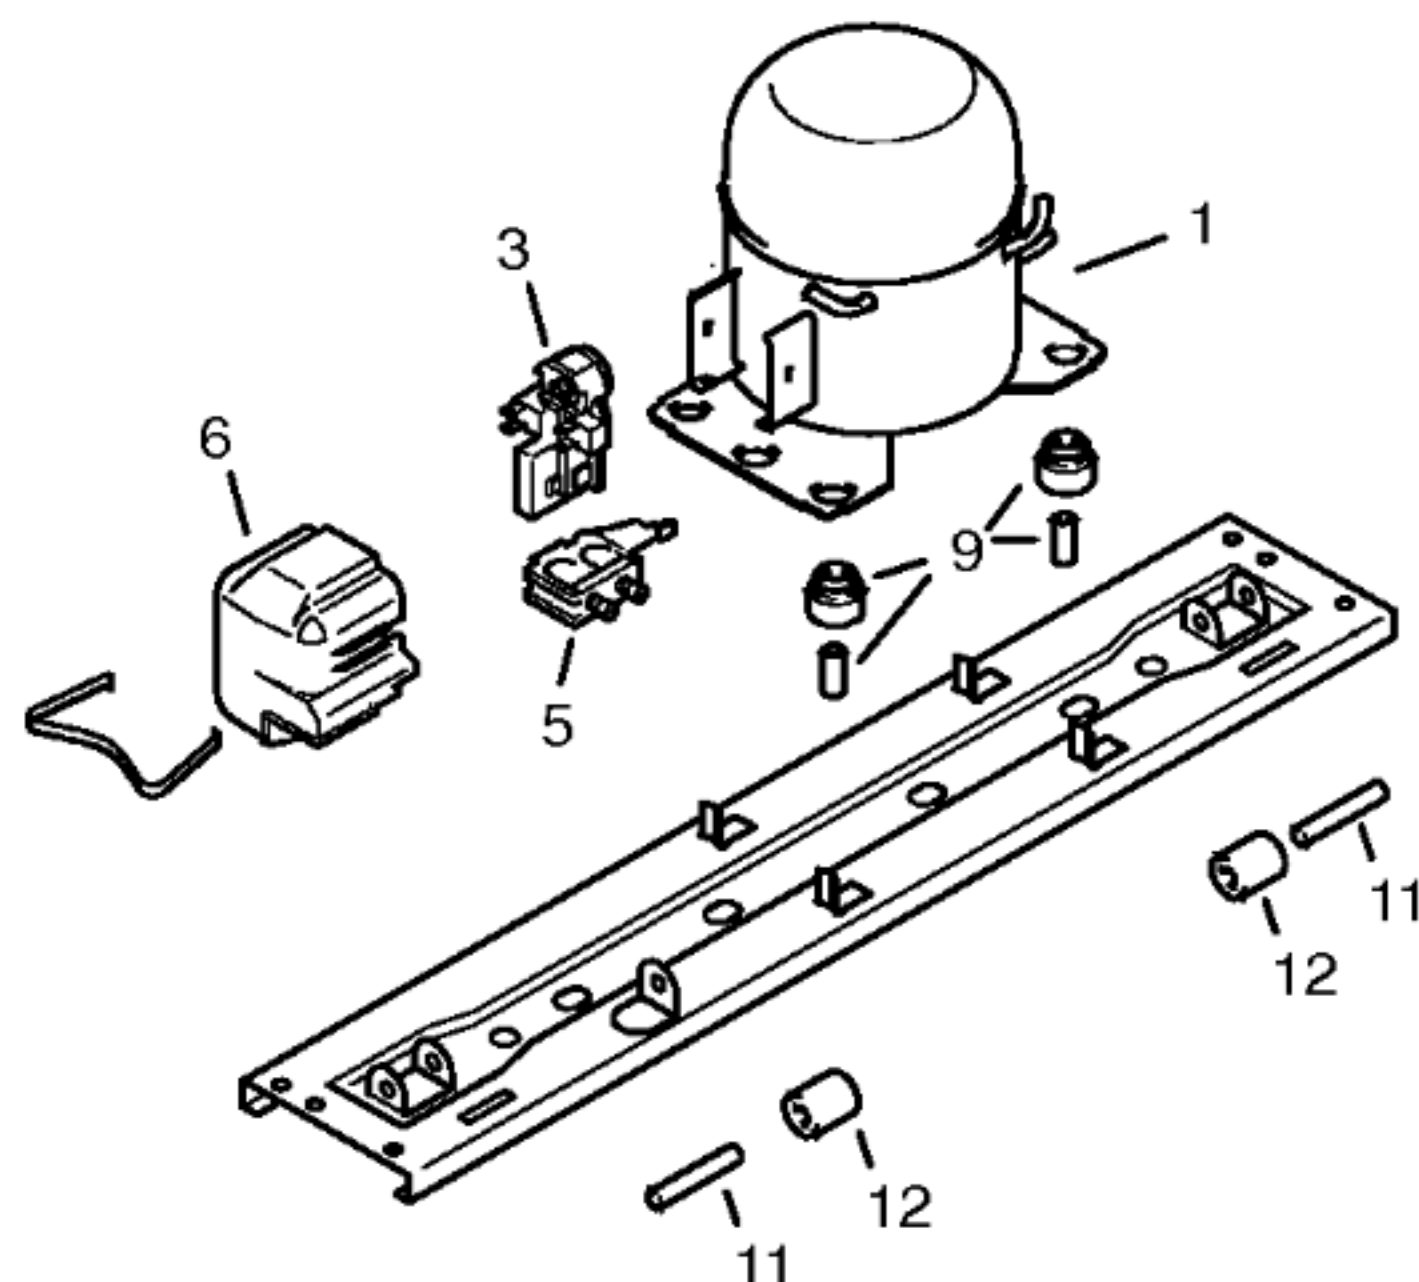

Pos.	V01-V04			
	Matsushita			
	DG 110 E			
1	14 2190			
2				
3	18 4235			
4				
5	16 2549			
6	16 6782			
7				
8	21 4604			
9	05 0166			
10				
11	01 9017			
12	01 9016			

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Matsushita		
Typ/Type		DG 110 E		
Förderleistung/Delivery/Débit	l/h	1955		
Anlaufstrom/Starting current/Cour de démarrage	A	8,6		
Widerstand/Resistance/Résistance	Ha/main/prin	W	11,78	
	Hi/aux	W	12,58	
Temp.-Regler/Thermostat				
Typ/Type				
Regelstellung/Position				
Schaltwerte/Switching values	"warm"			
Valeurs de commutation	"kalt"			
	"alarm"			
Füllmenge/Fill.quantity/Charge		R600a		
Anschlußwert/Conn.load/Puiss. connectée		W	116	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance	W			
Leistung/Power/Puissance	W			
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance	W			
NTC-Fühler / Sensor		°C	kW	°C
		+10	9,95 □ 0,18	-18 43,31 □ 1,10
		+5	12,70 □ 0,18	-22 54,66 □ 1,59
		0	16,33 □ 0,16	-26 69,42 □ 2,29
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance	W			
Spannung/Voltage/Tension	V			