


SIWAMAT XB 1260	—	WXB1260EU/01–V01
SIWAMAT XB 1260	—	WXB1260FF/01–V02
SIWAMAT XB 1260	—	WXB1260NL/01–V03
SIWAMAT XB 1260	—	WXB1260/01–V04

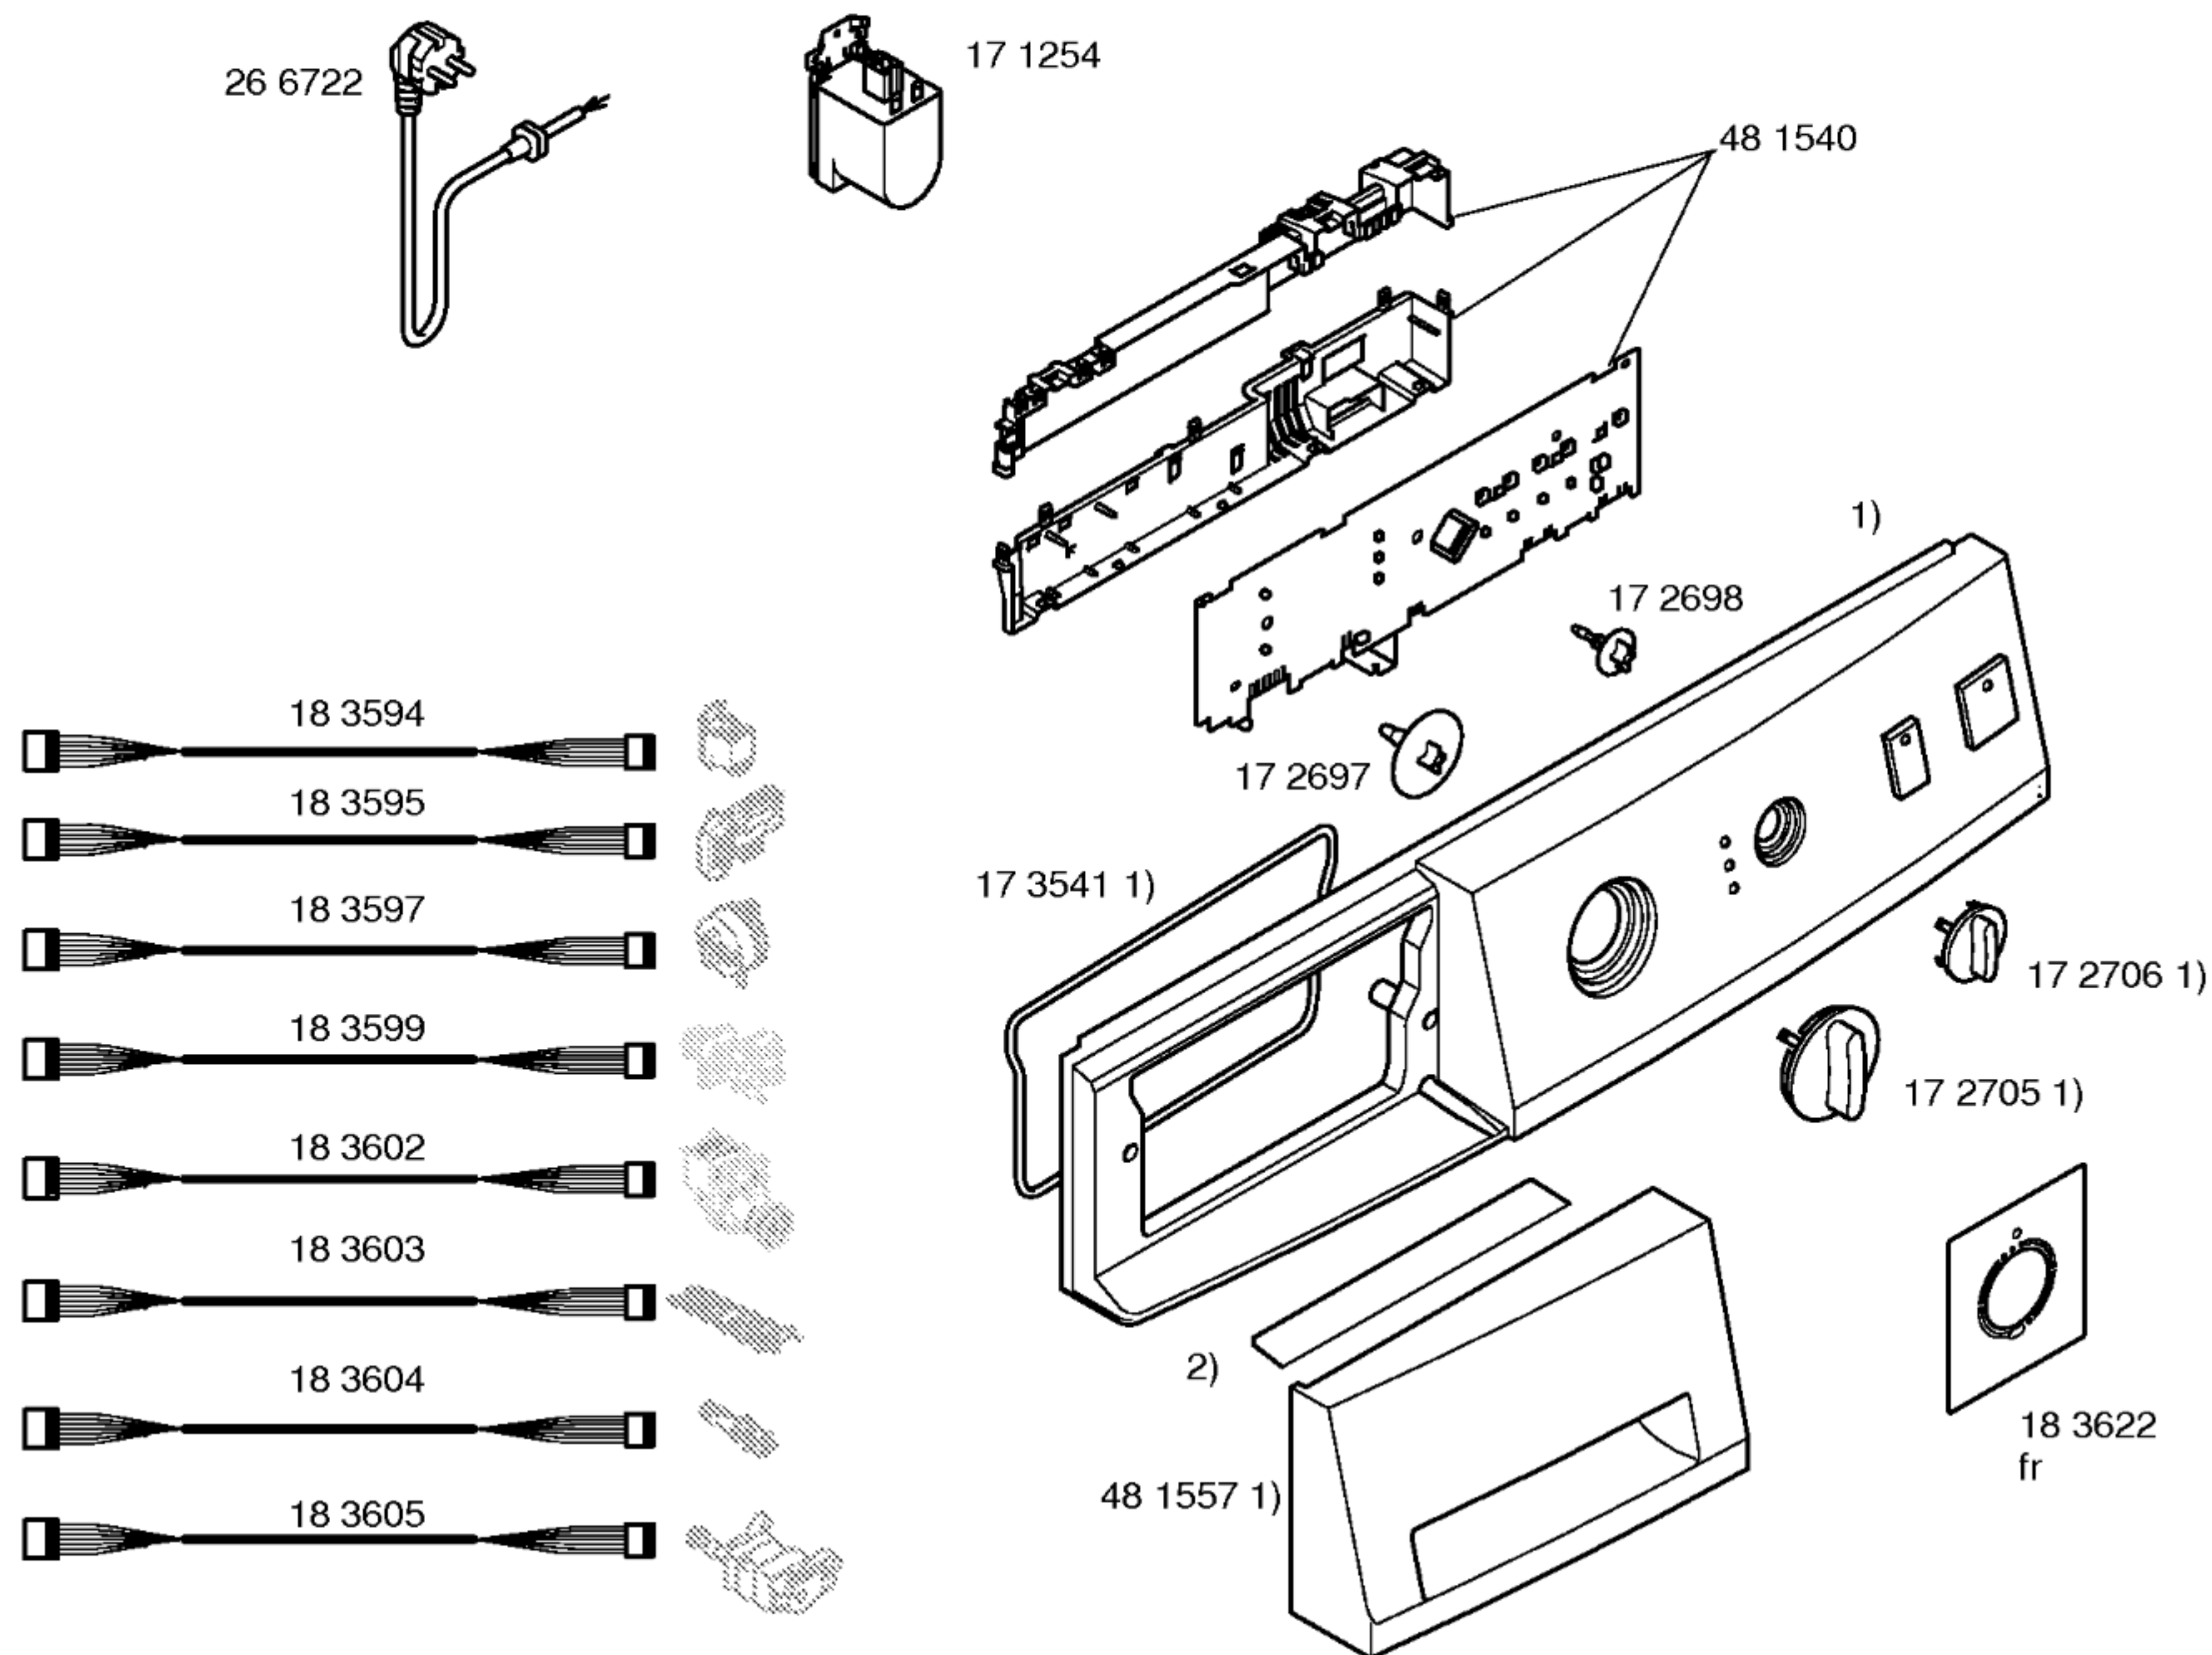

Gebrauchsanweisung


52 8749
de,it,sv
52 9820
da,fi,no
52 9821
en,fr
52 9751
fr
52 8750
fr,nl
52 9188
de
58 1786
pt


1) 36 2260 – V01
Symbol
36 2262 – V02
fr
36 2261 – V03
fr,nl
36 2960 – V04
de

2) 18 3620
da,fi,sv,no
18 3621
de,it,en,fr


Metalabdeckung—VDE

21 5174

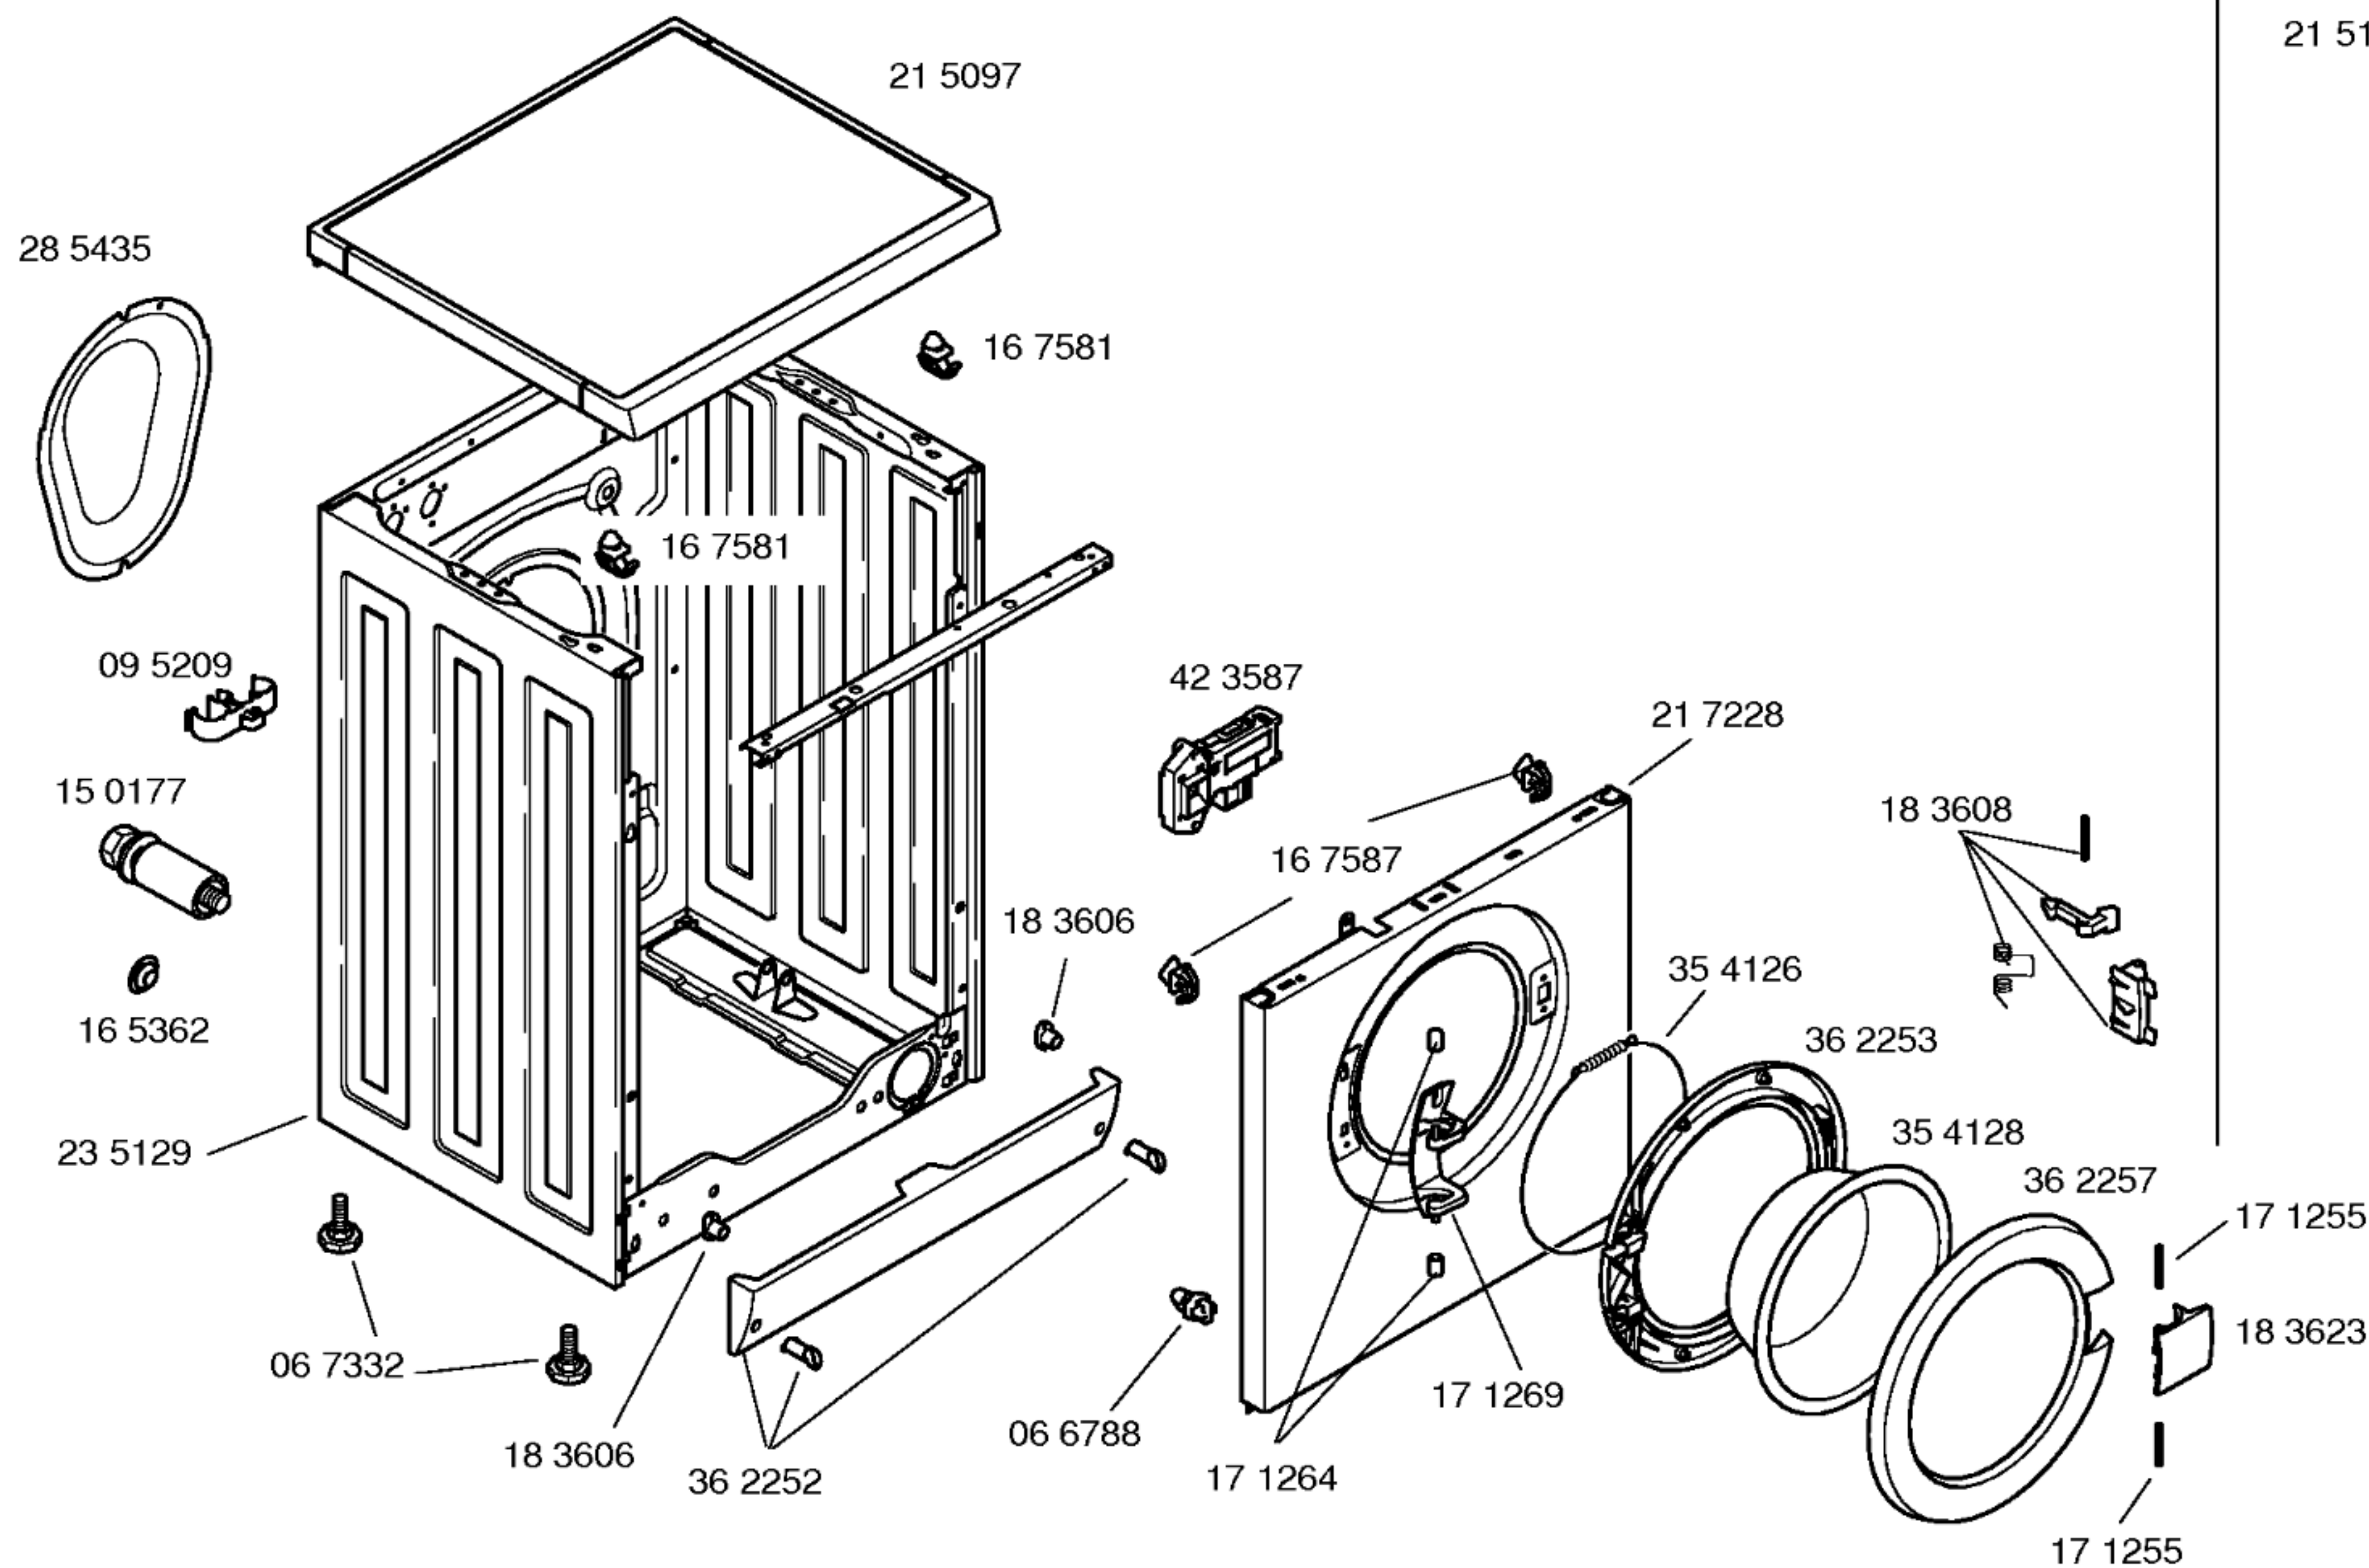

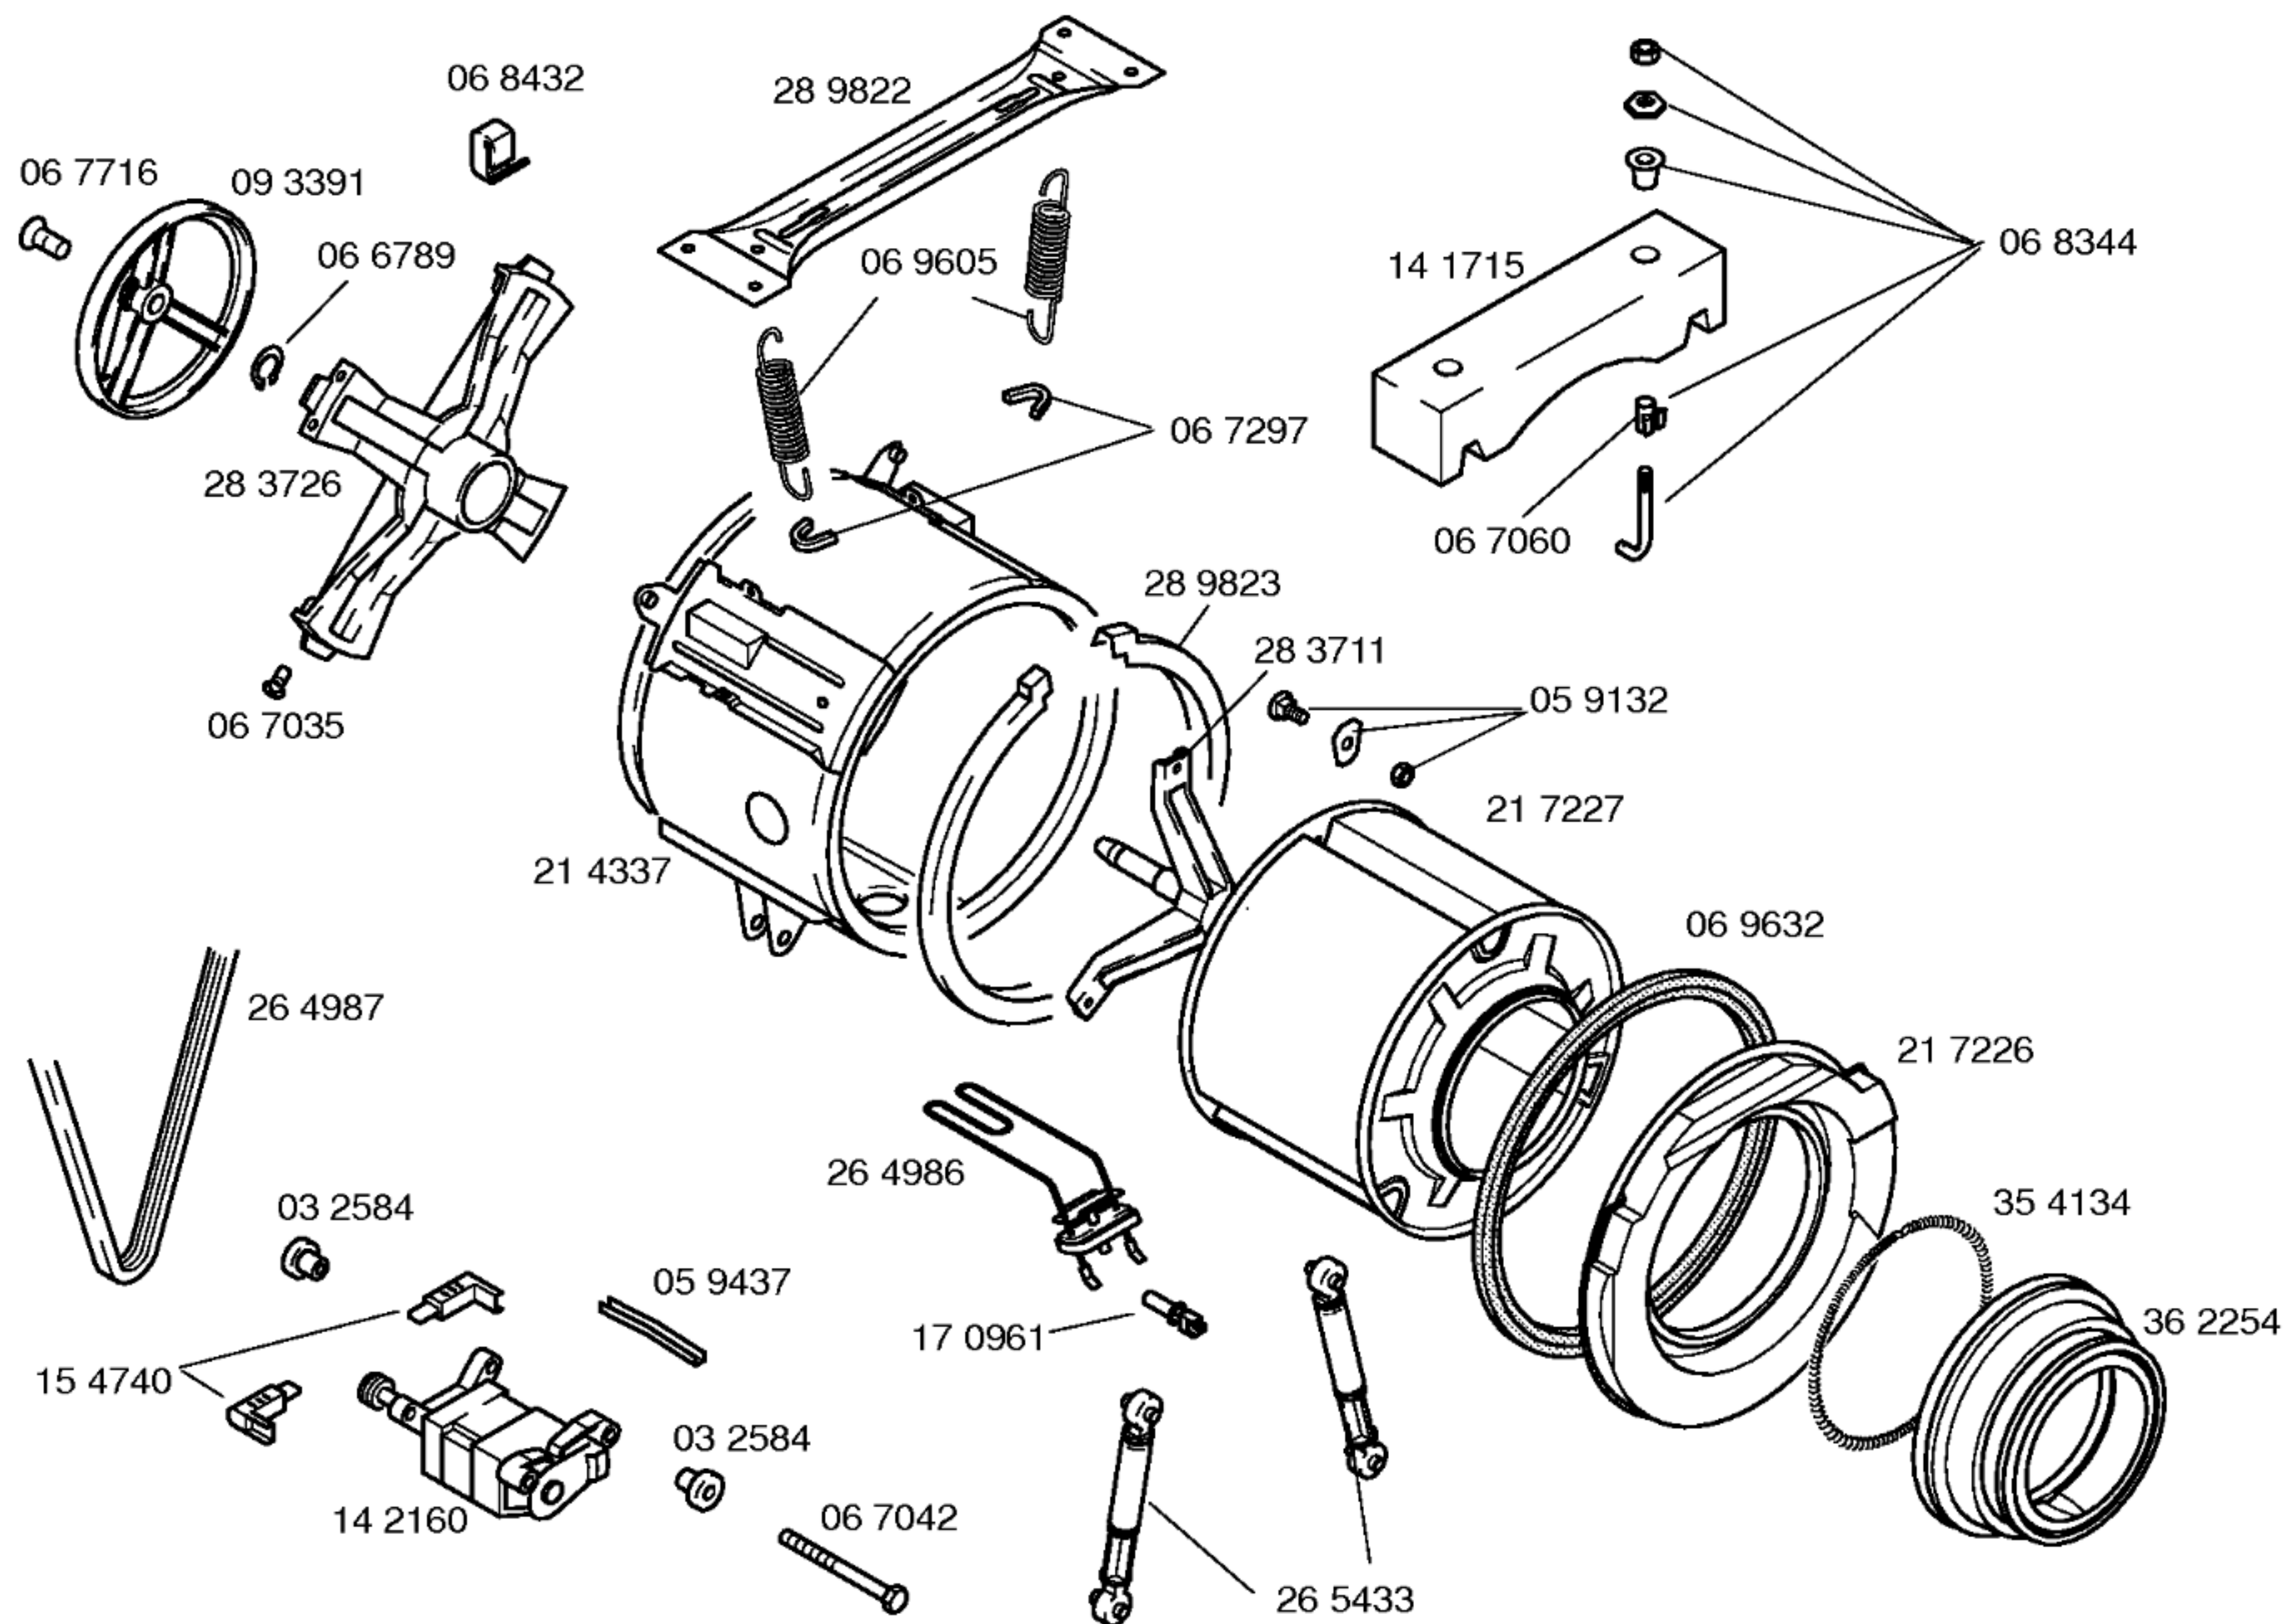

SIWAMAT XB 1260 – WXB1260EU/01–V01
 SIWAMAT XB 1260 – WXB1260FF/01–V02
 SIWAMAT XB 1260 – WXB1260NL/01–V03
 SIWAMAT XB 1260 – WXB1260/01–V04

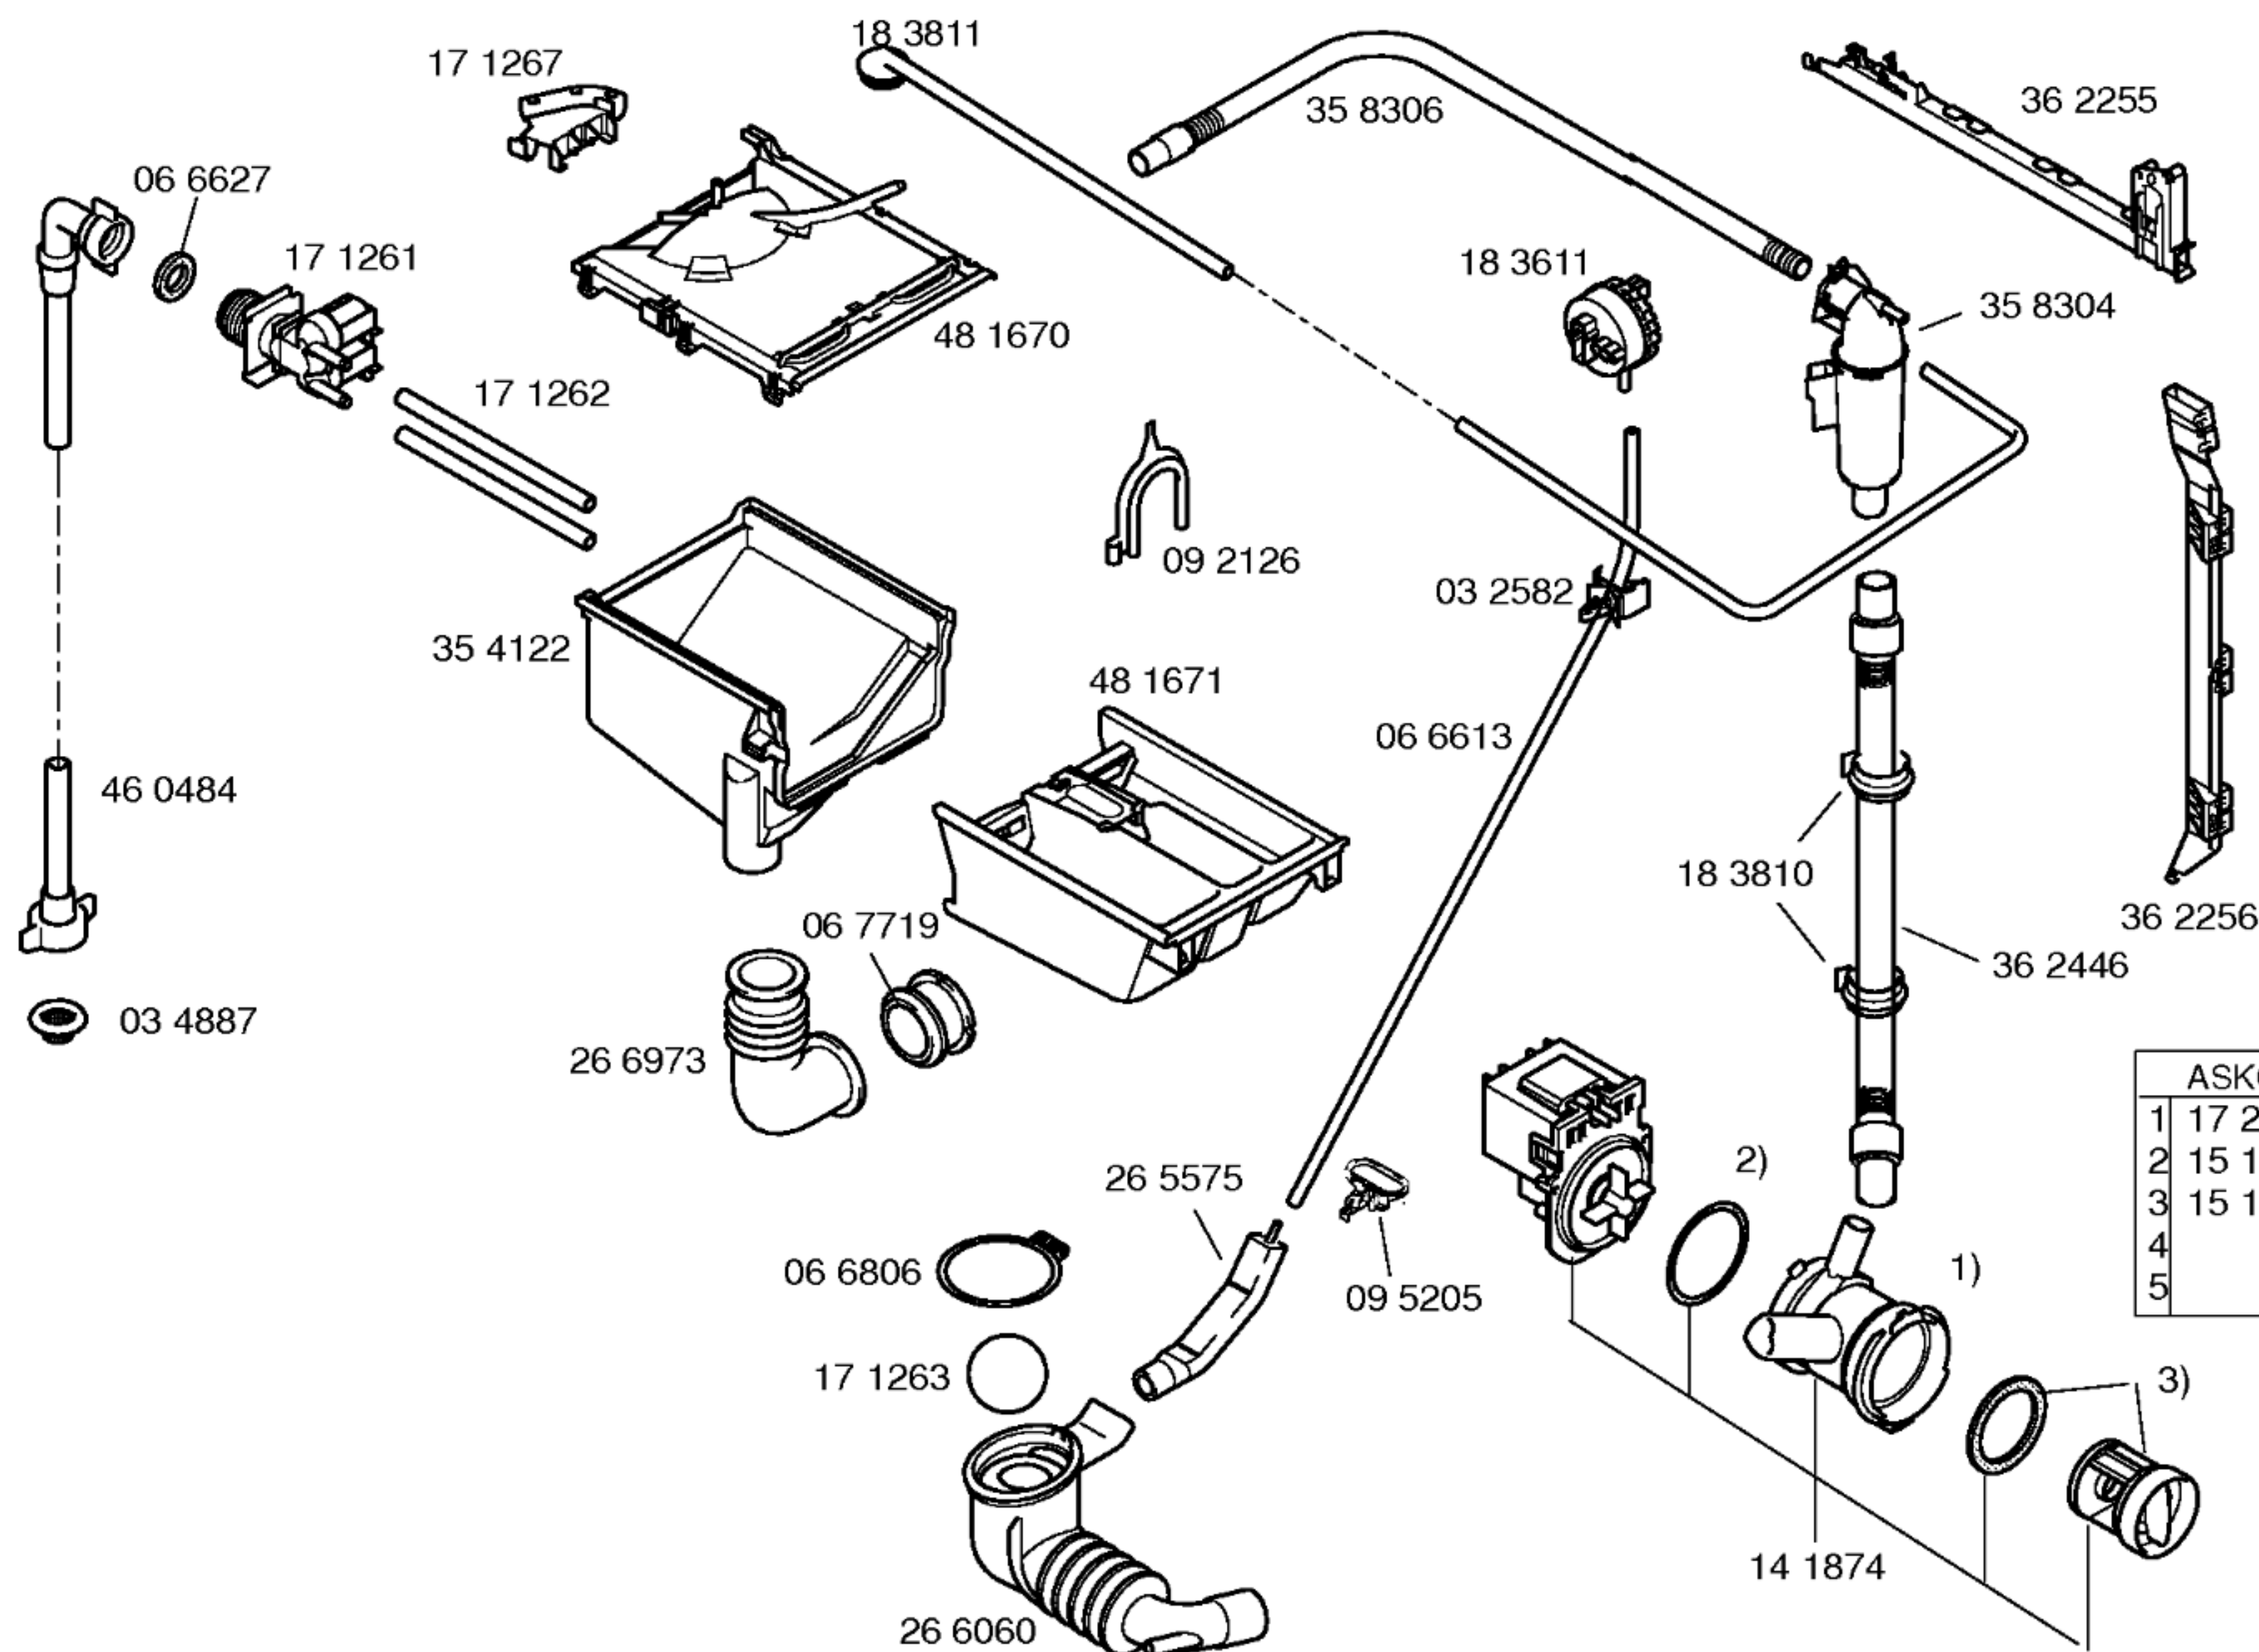

	ASKOLL	COPRECI
1	17 2340	17 2337
2	15 1408	15 4358
3	15 1409	172339
4		
5		