



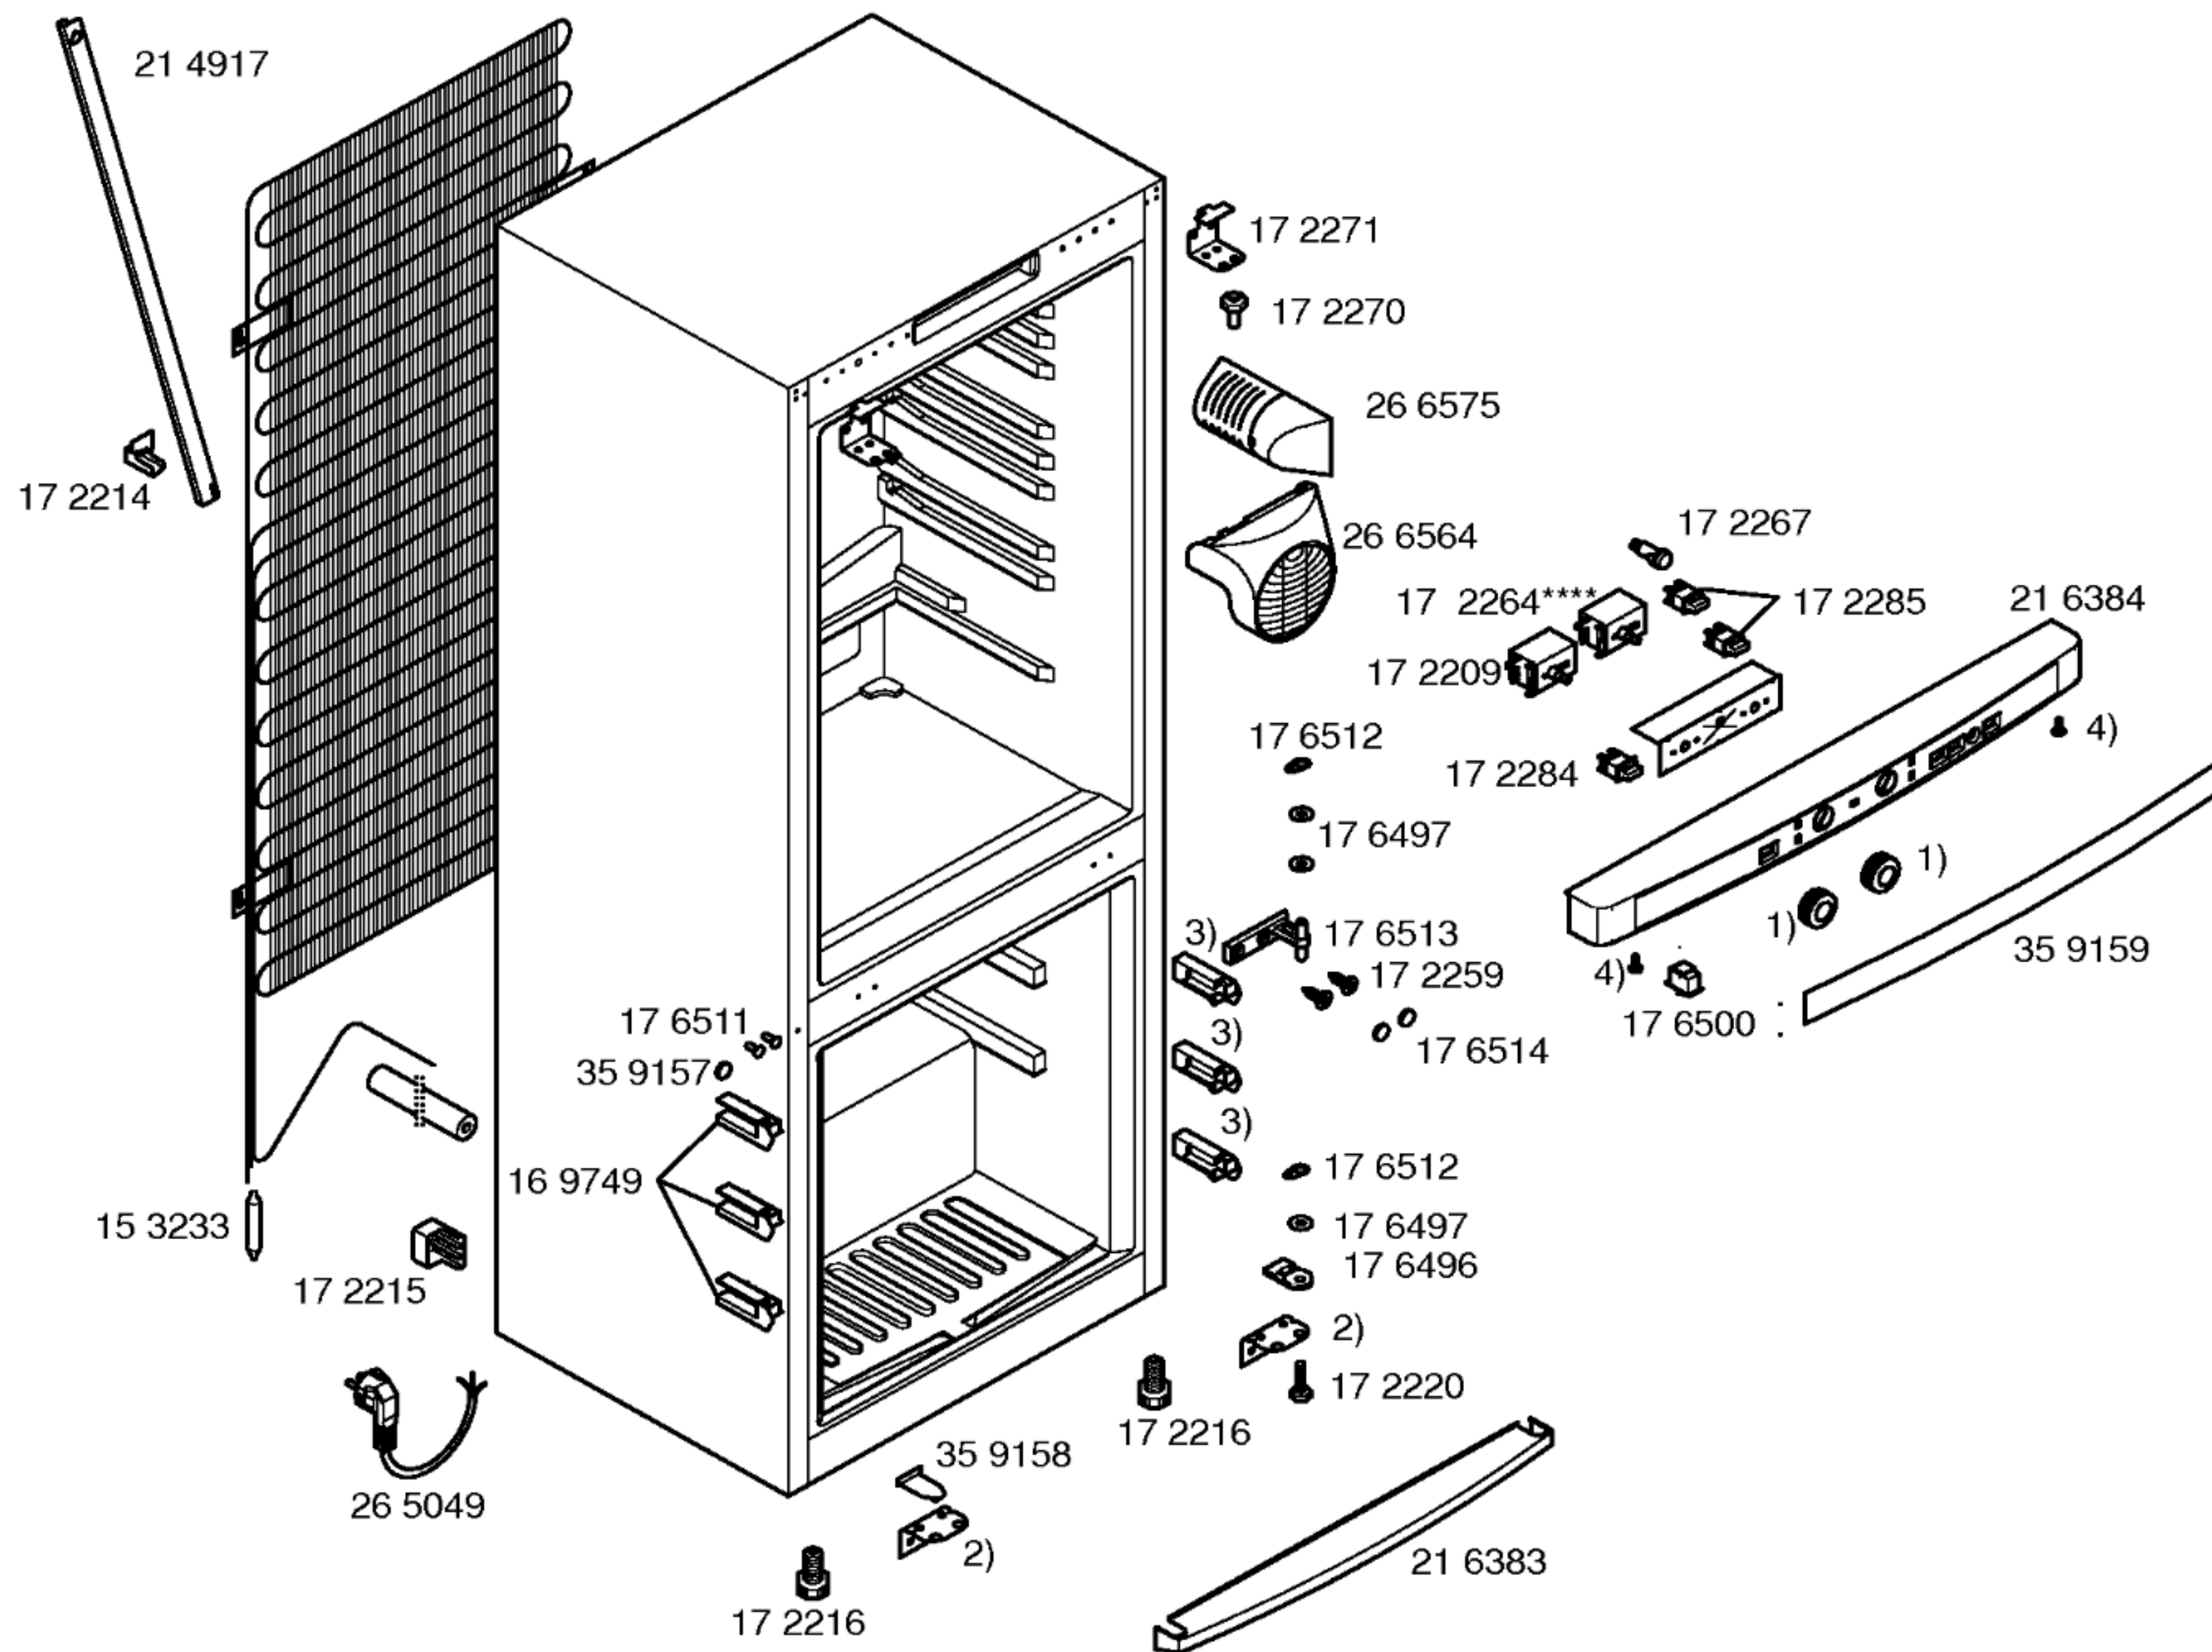


Gebrauchsanweisung
52 3442
(GR,TR)


- 1) 17 2283
- 2) 17 2225
- 3) 16 9753
- 4) 17 6511

SIEMENS KG 43S72/01

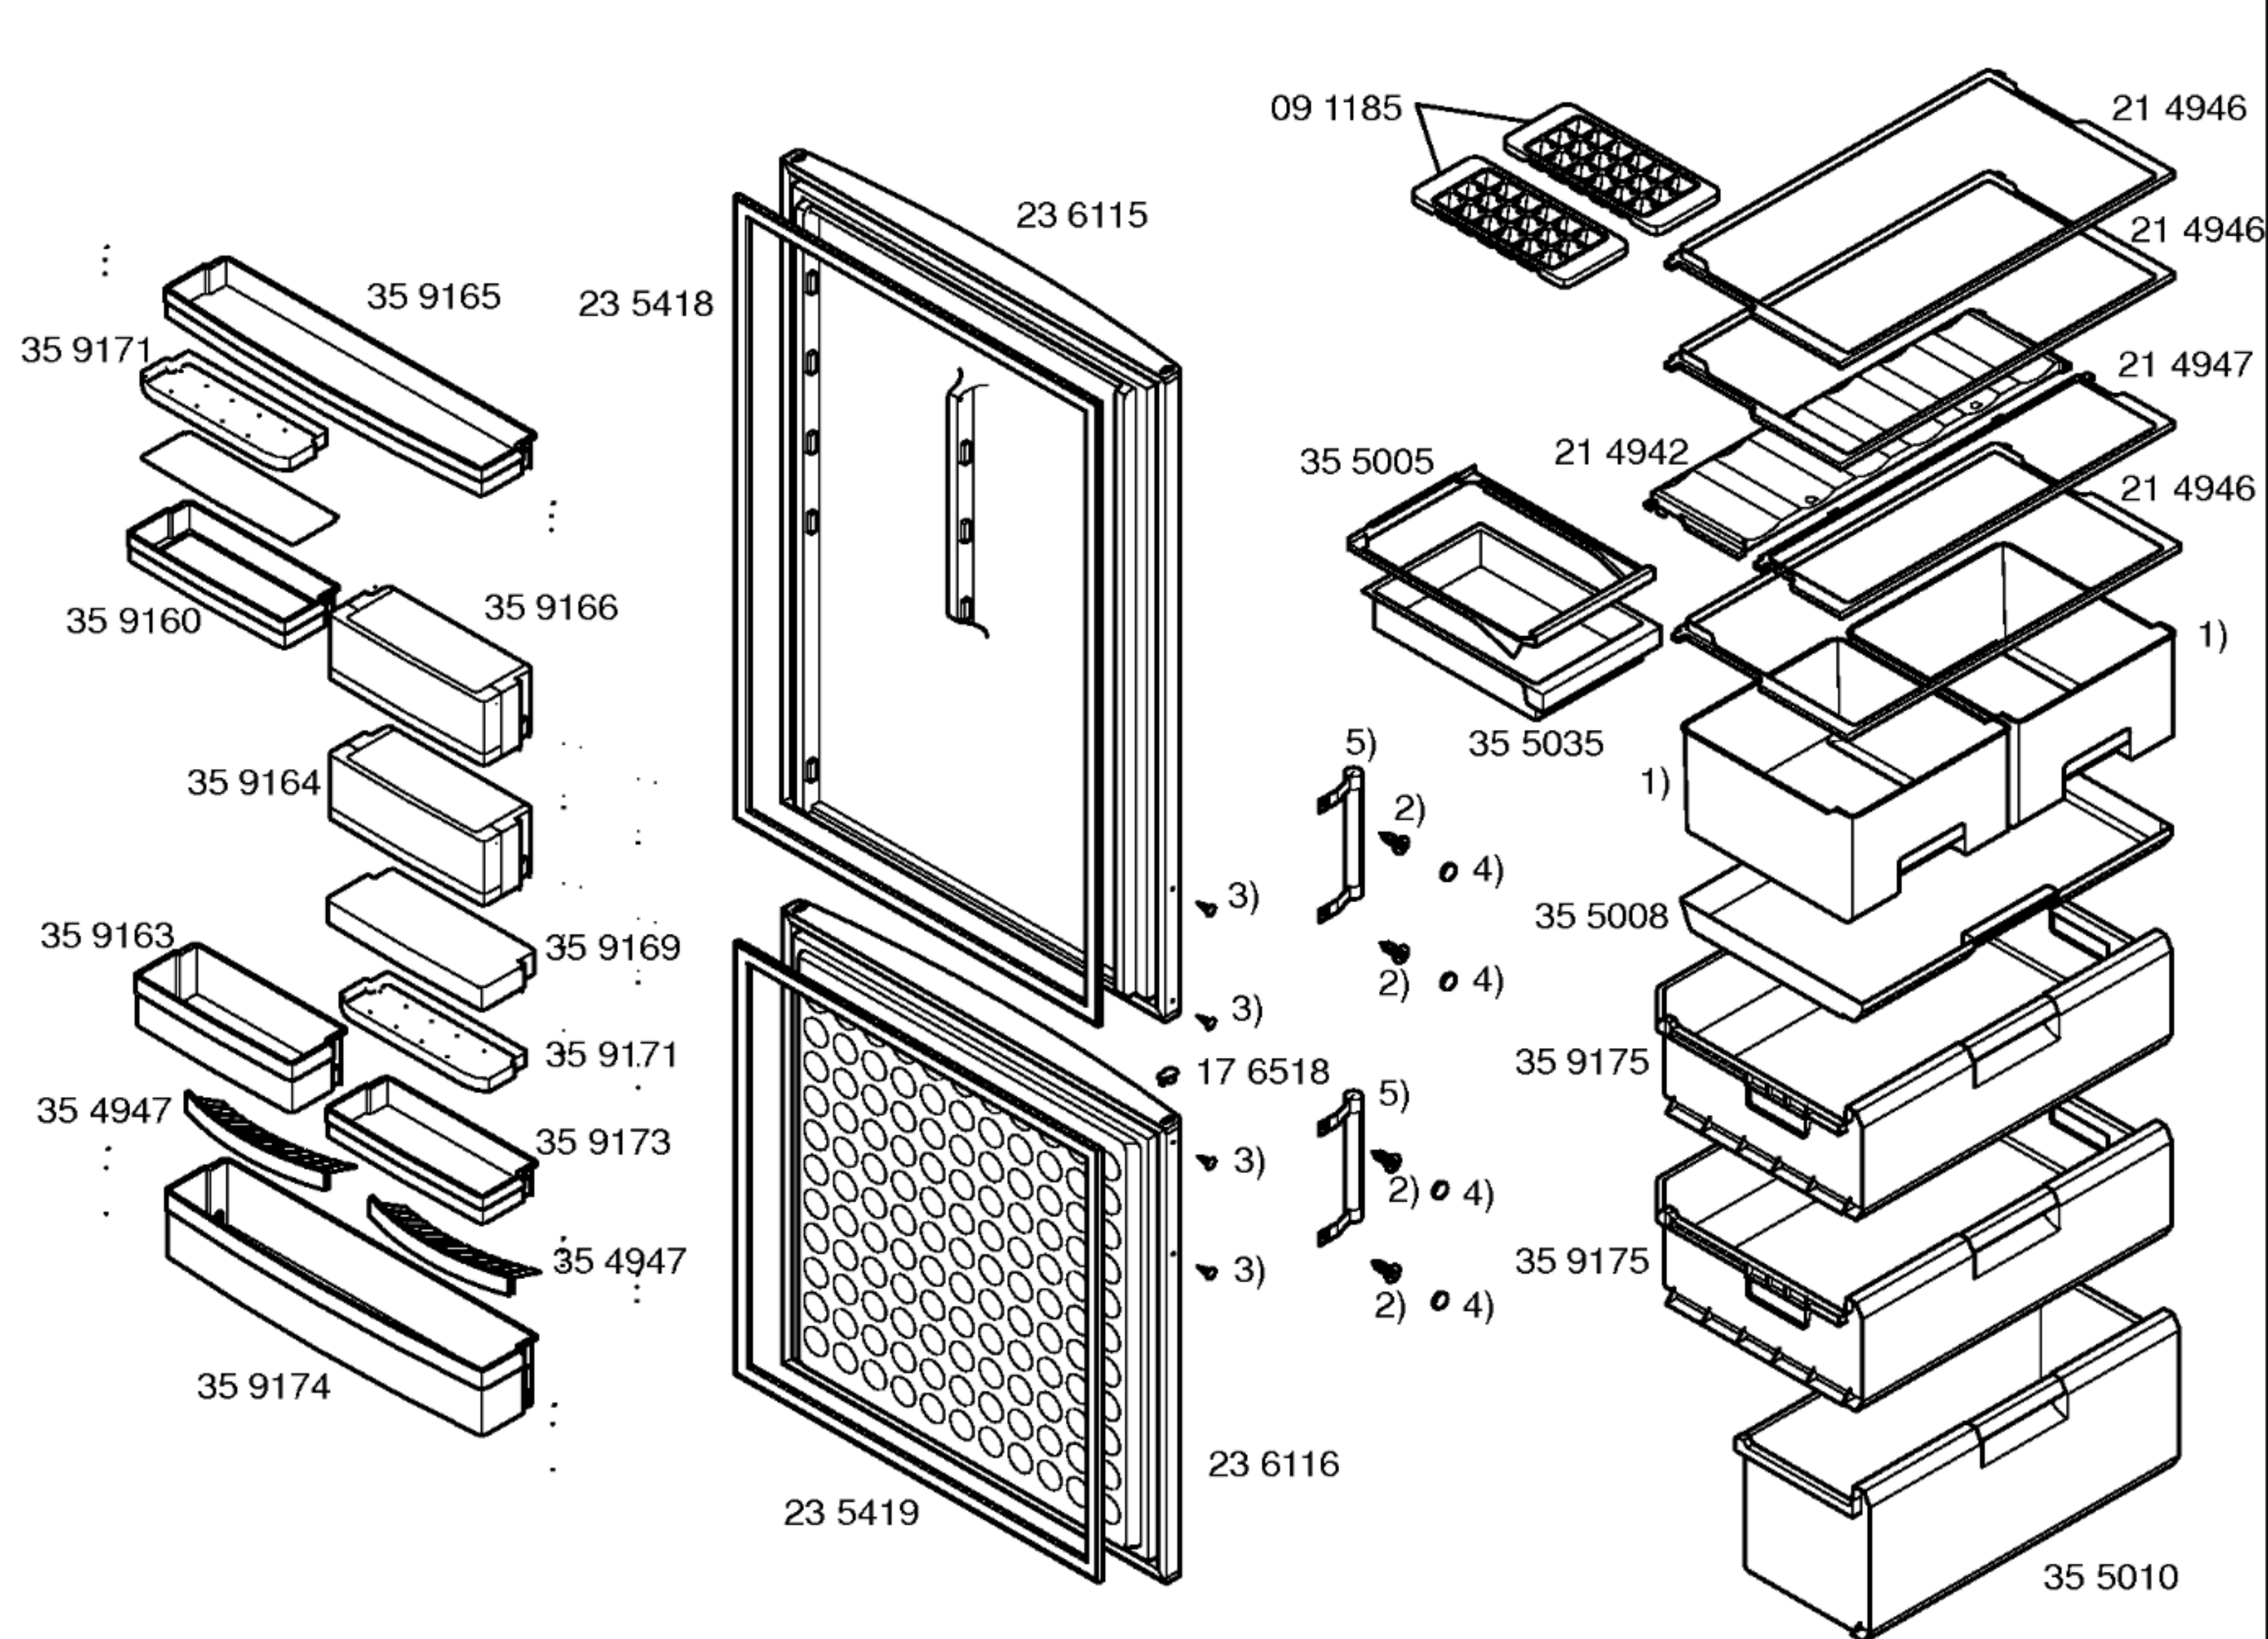

- 1) 35 5007
- 2) 17 2274
- 3) 17 6517
- 4) 35 9157
- 5) 26 8664

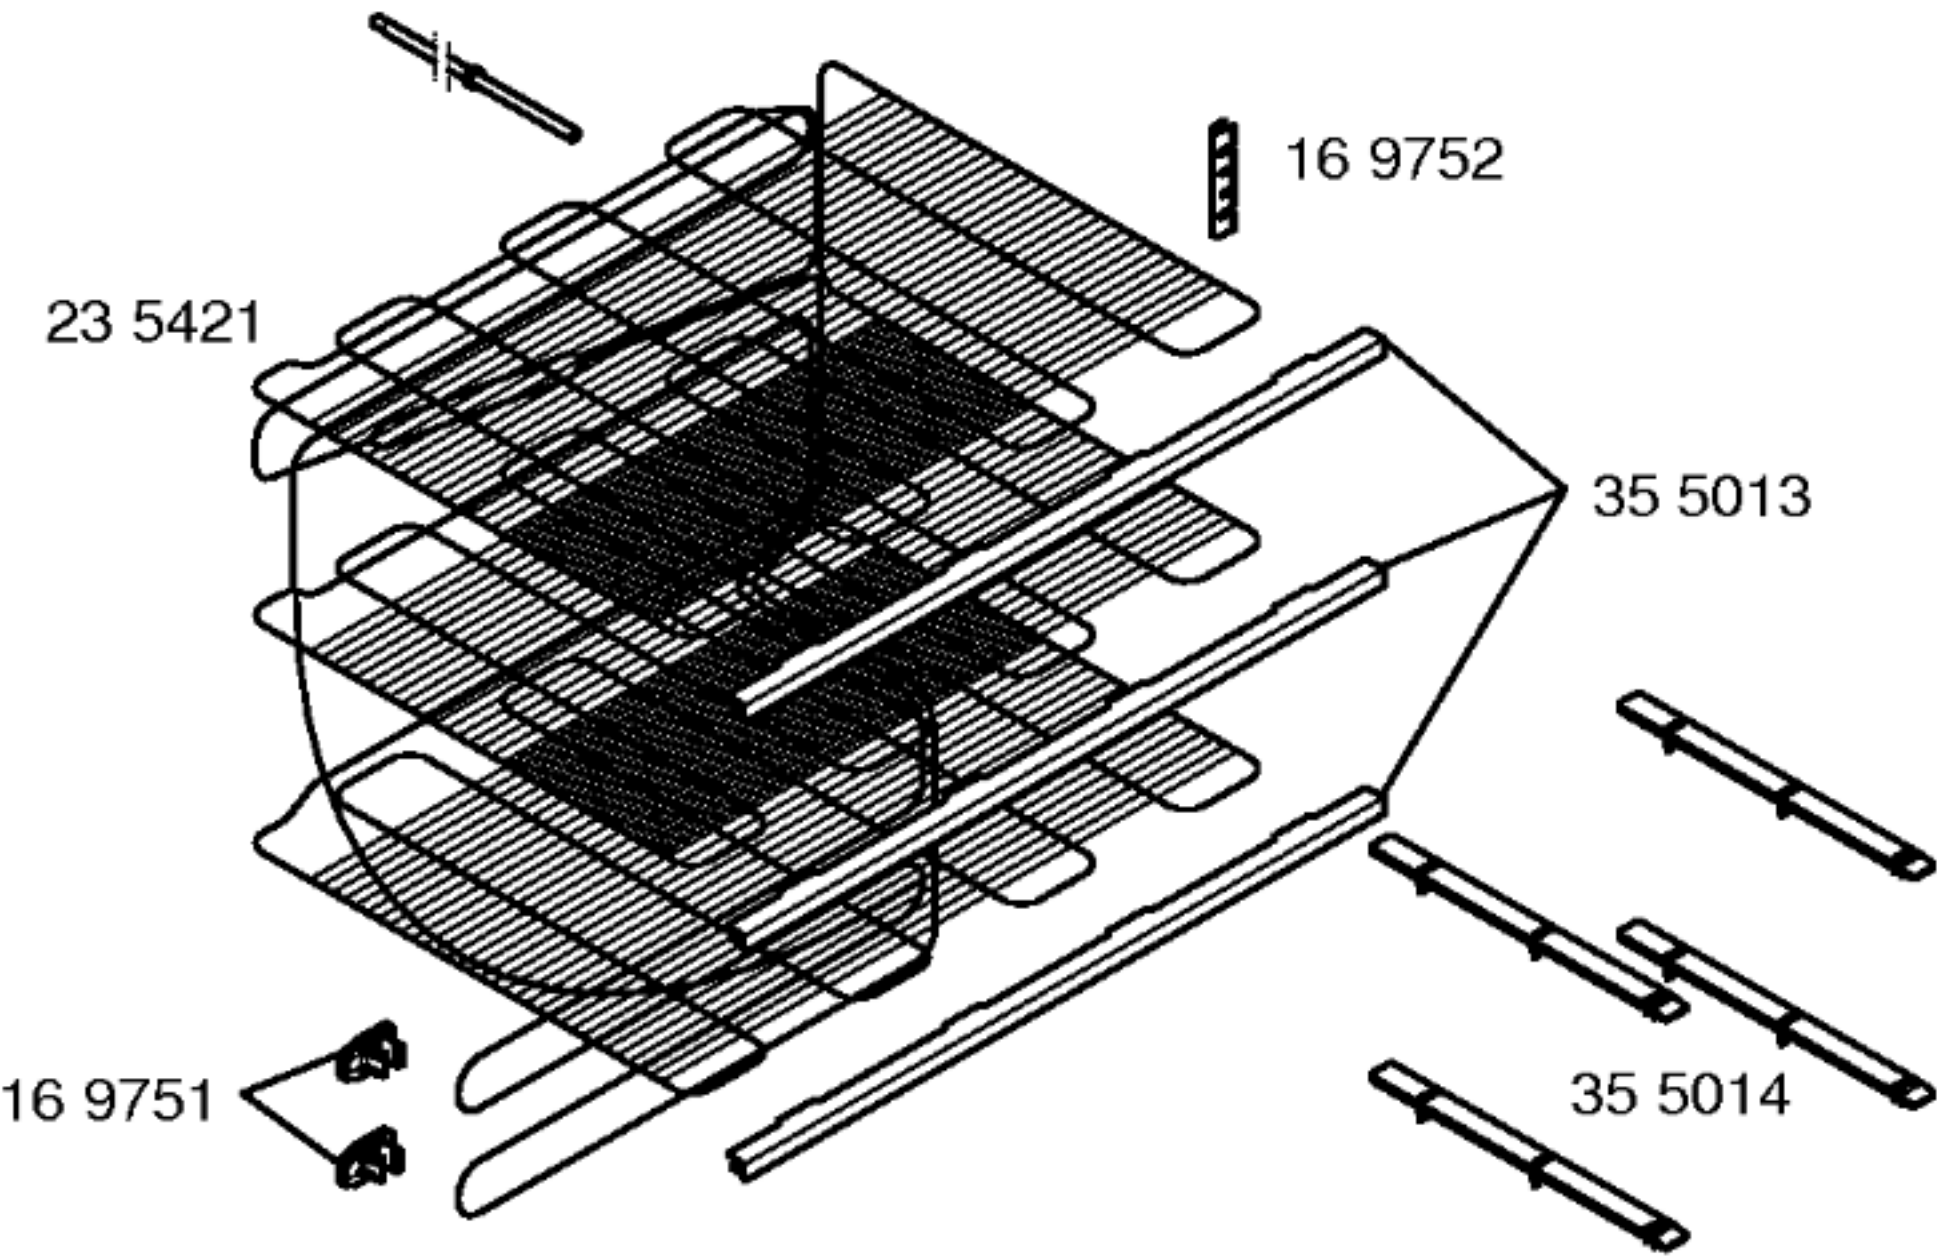

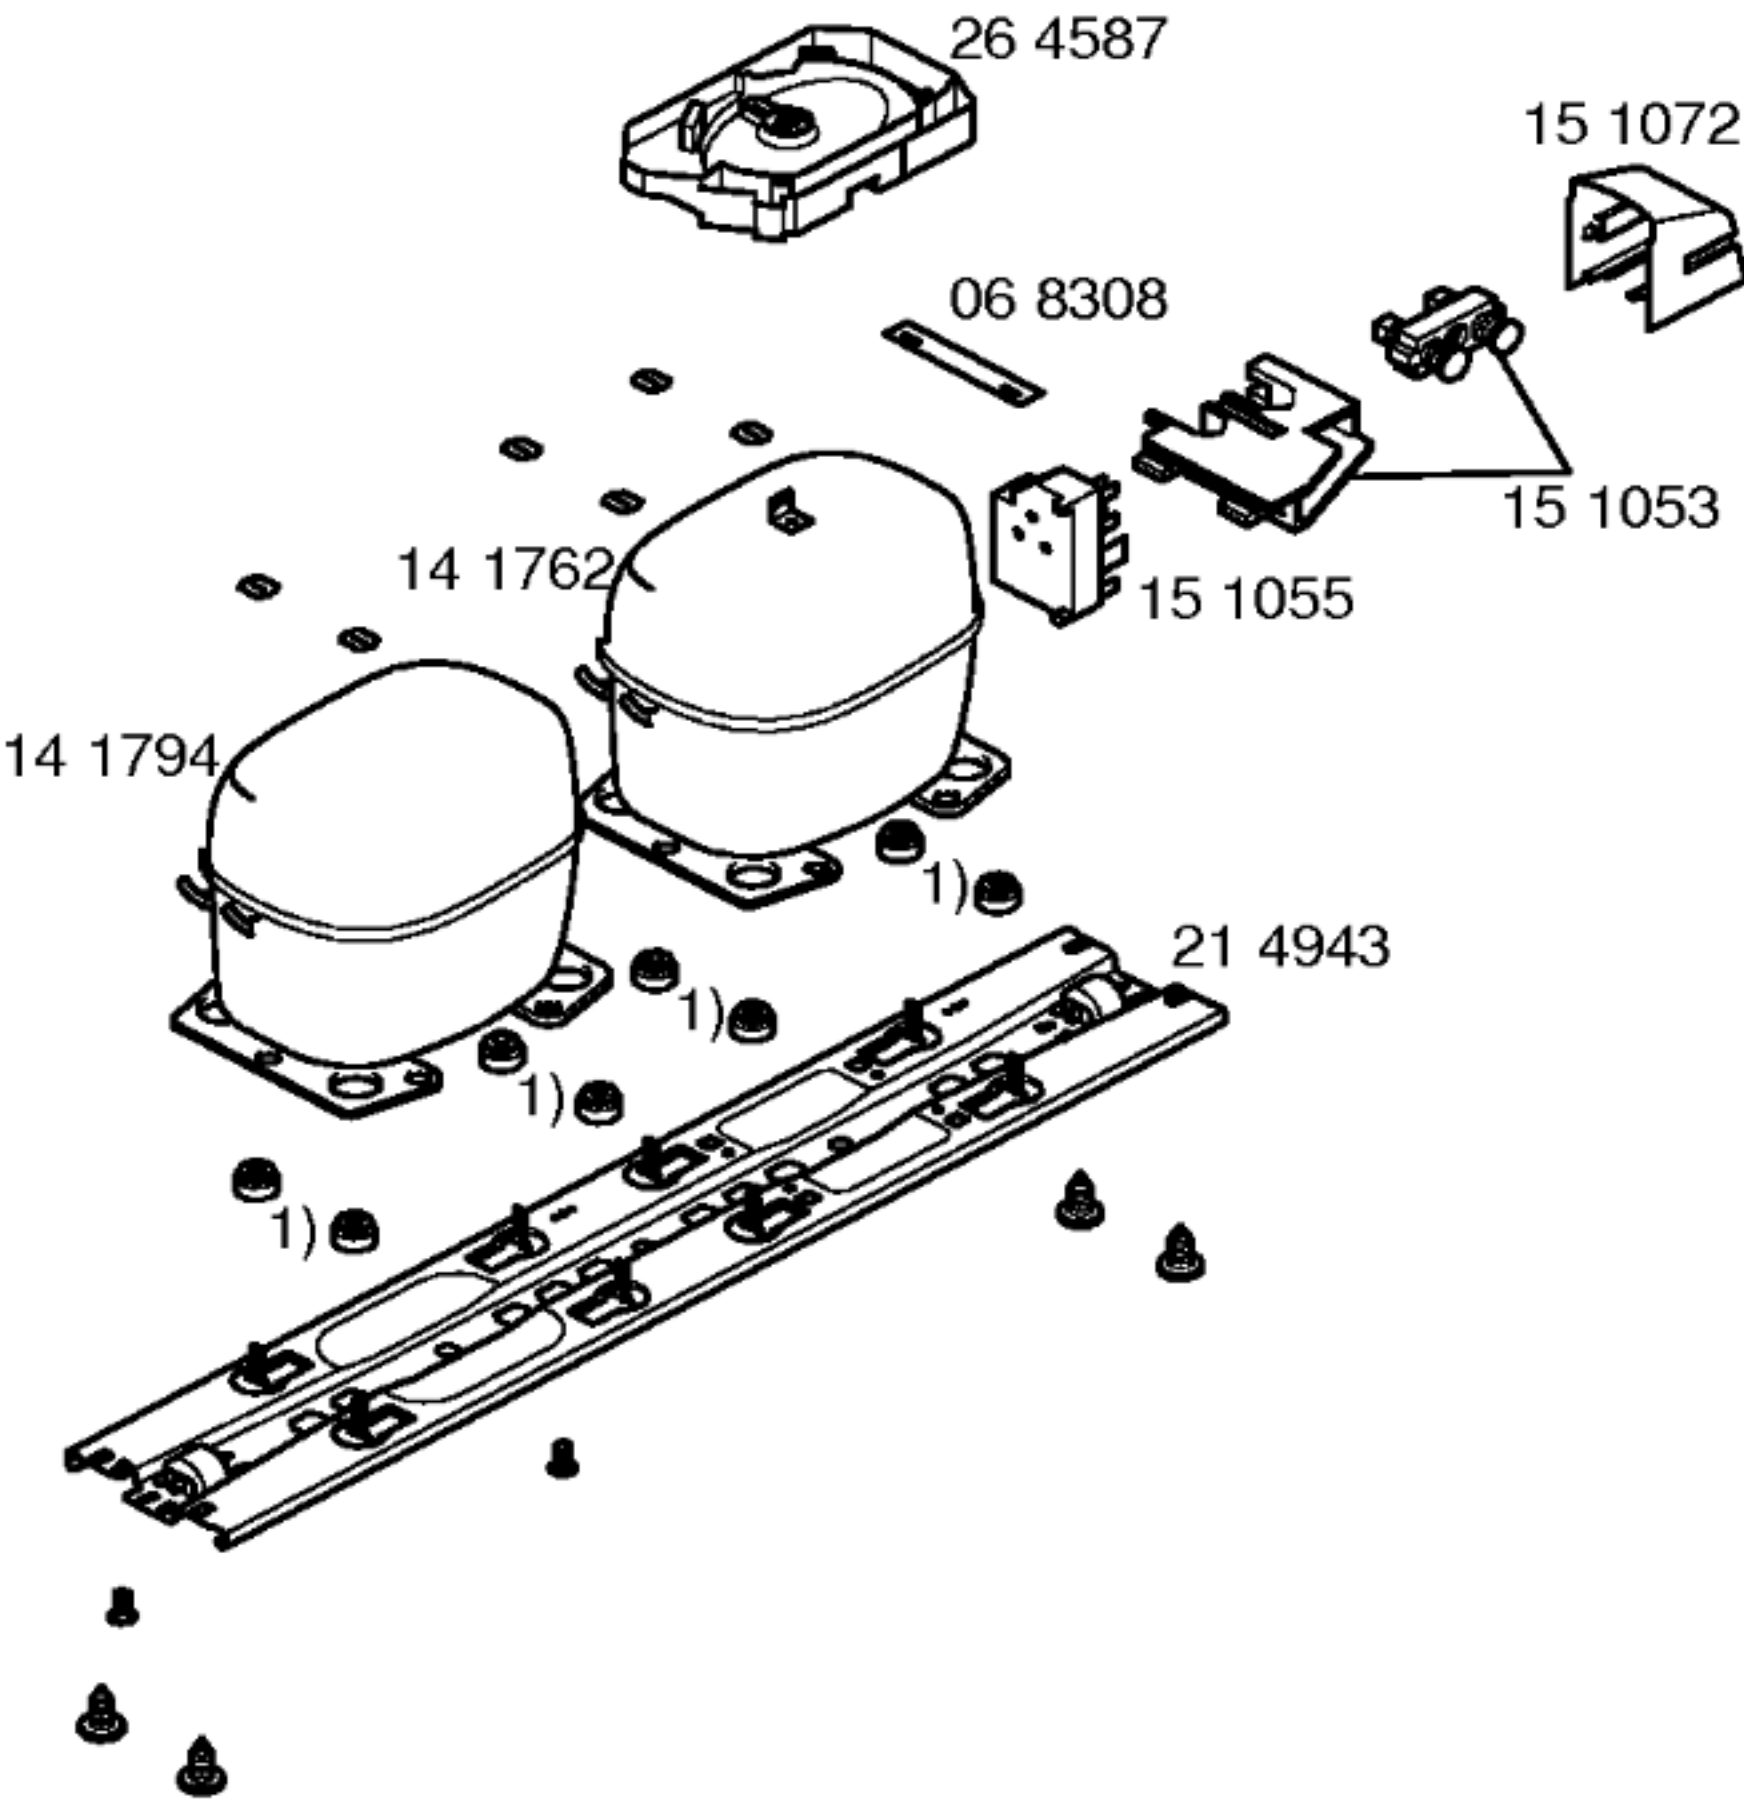

1) 06 0182

TECHNISCHE DATEN/TECHNICAL DATA/DONNEES TECHNIQUES/DATOS TECNICOS				
Verdichter/Compressor/Compresseur/Compresor		Matsushita		
Typ/Type/Tipo		D110C21RAX5		
Förderleistung/Delivery/Debit/Aspiración l/h		1955		
Anlaufstrom/Starting current/Cour.démarrage/Int.arranque		A	12,9	
Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm			7,3	
		Hi/aux.	17,5	
Klappe Therm./Thermostat/Termostat		ATEA		
Typ/Type/Tipo				
Reglerstellung/Position/Conexión		MAX	MED	MIN.
Schaltwerte/Switching values/		-		
Valeurs de commutation/Desconex.		..ein/conex.°C	-7,5°±2	-3°±1,5 +2°±2
(..abtaven od)		..aus"/descon.		
Füllmenge/Fill. quantily/Charge/Carga R134a		g	120	
Anschlusswert/Comm. load/Puiss. Connect./Potenc.		W	170	
Heizung/Heater/Chauflage/Resistenc.descong.			Verdampfer	Ablaufrinne
Widerstand/Resistance/Resistencia		Ohm	296	1180
3490				
Leistung/Power/Puissance/Potencia		W	185	45
Ventilador/Blower/Ventilateur/Ventilador			Verdichter	Verdampfer
Widerstand/Resistance/Resistencia		Ohm	410	612