



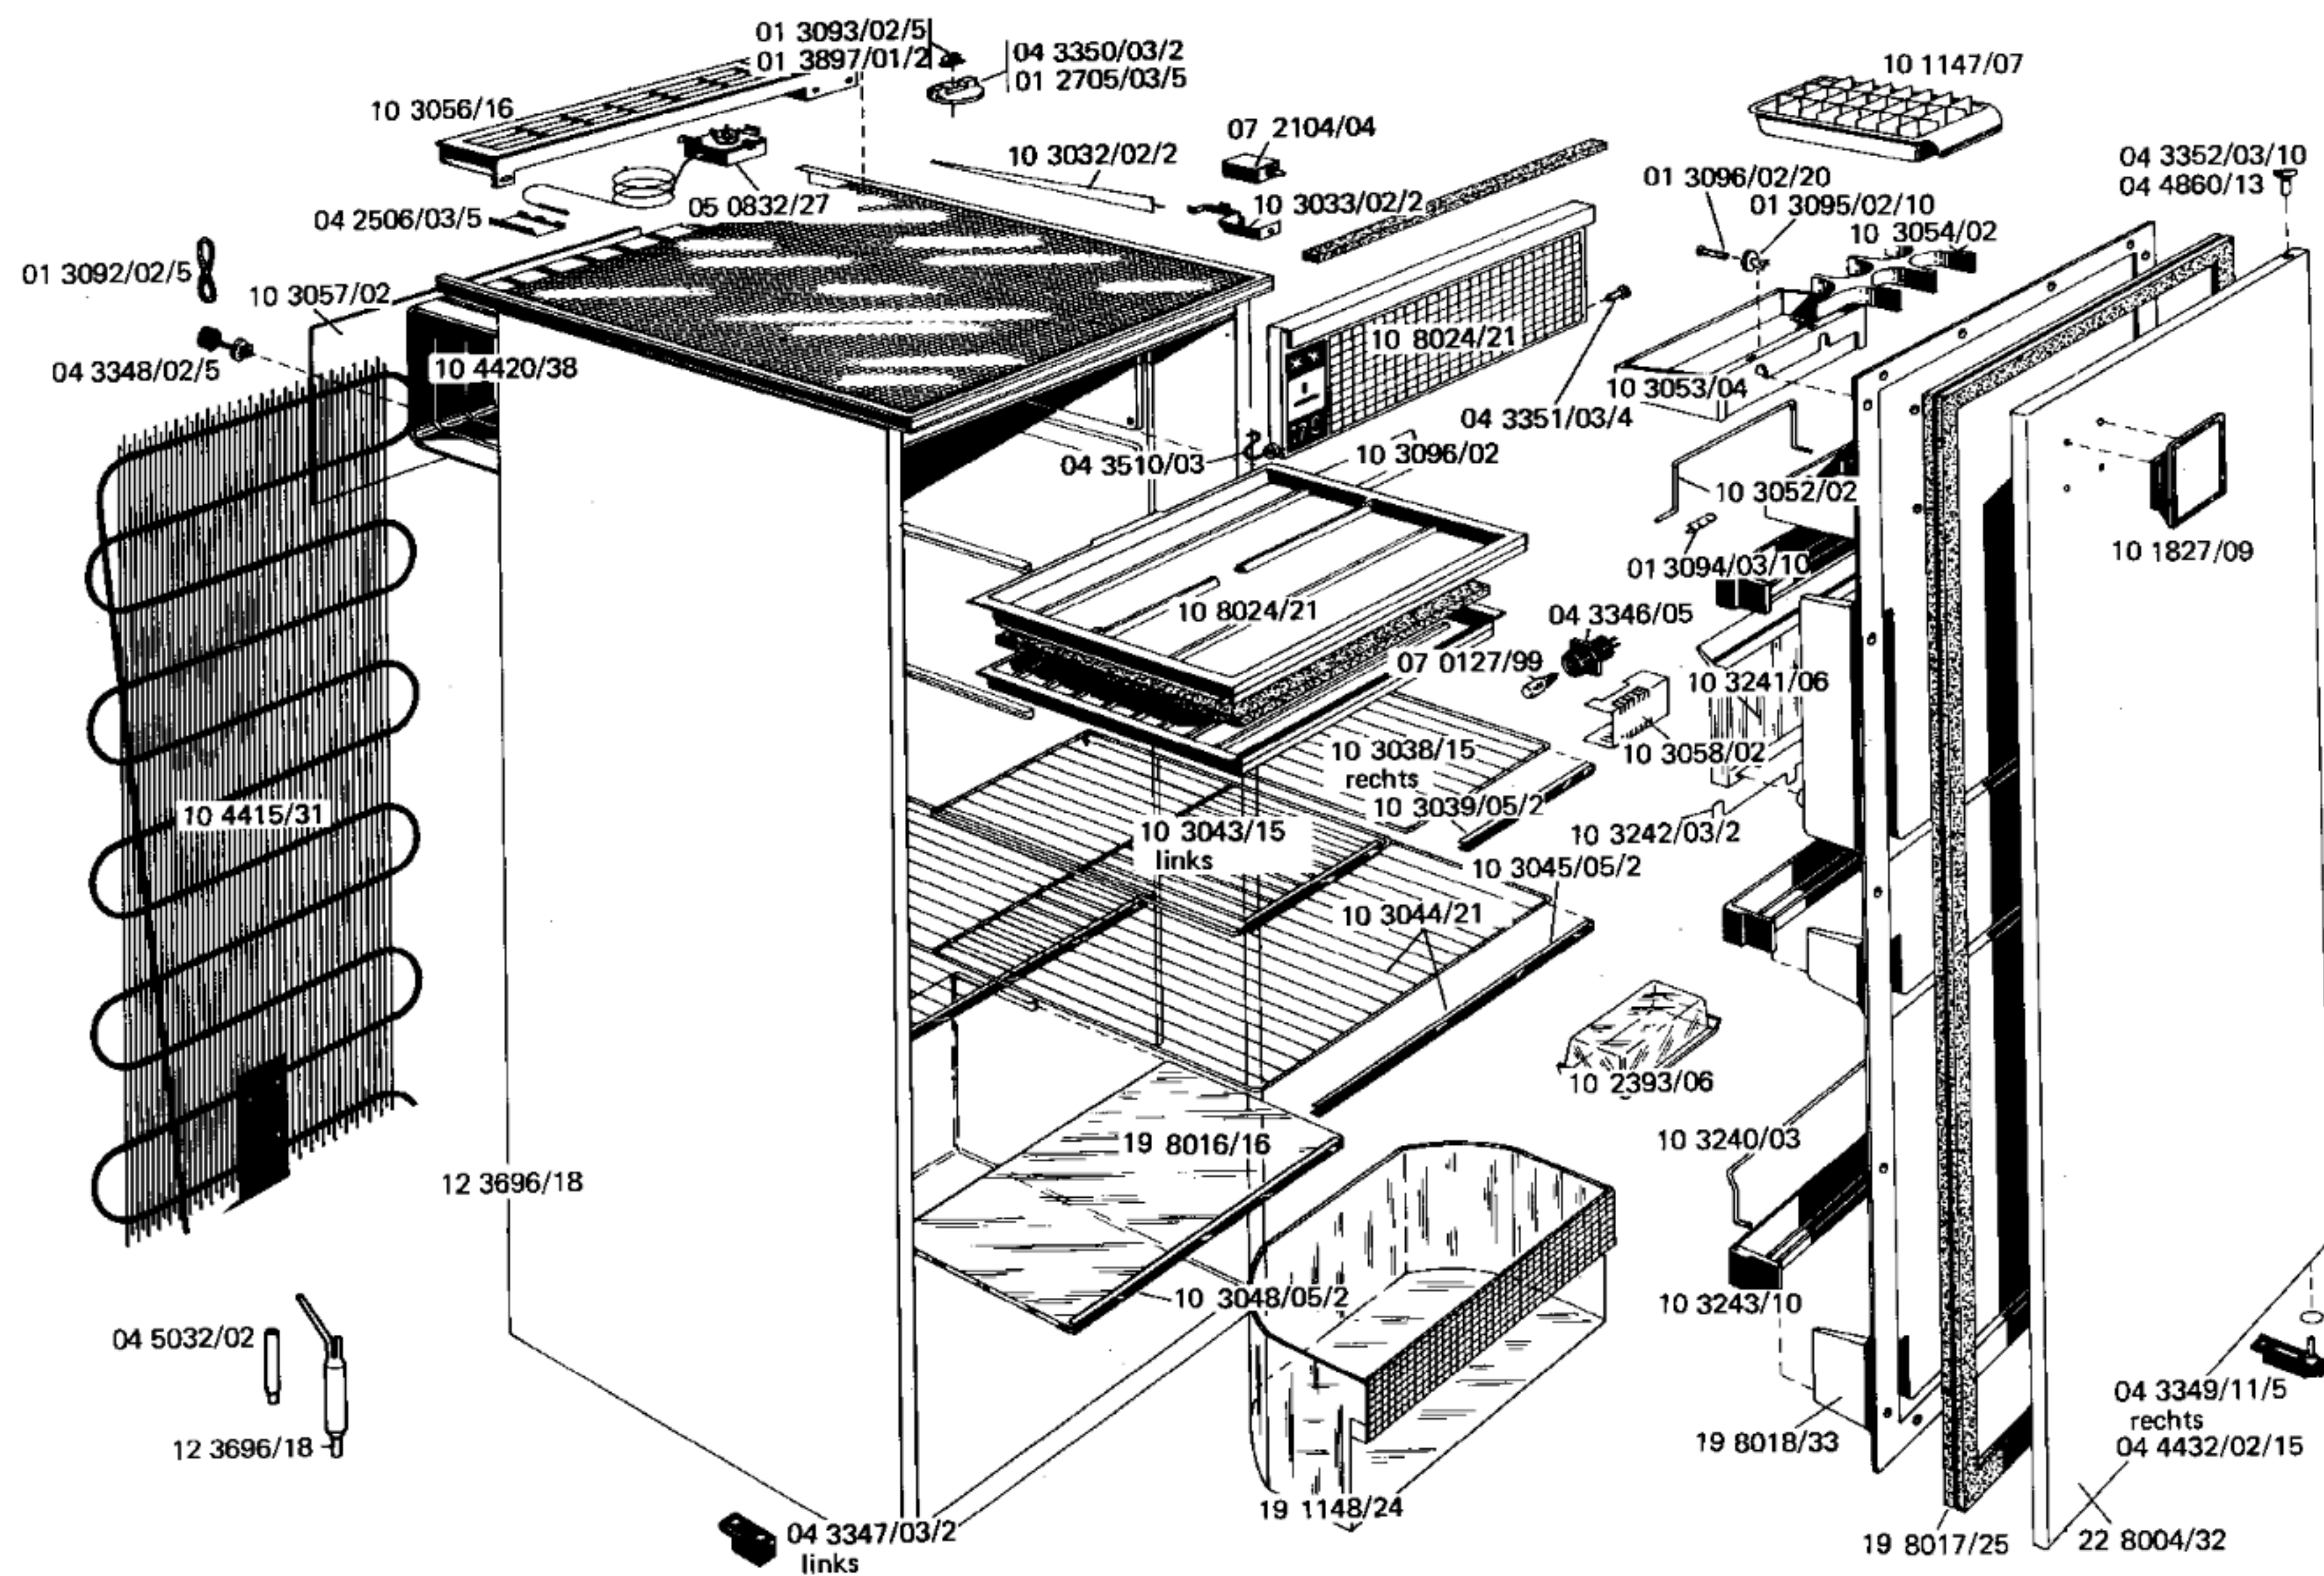

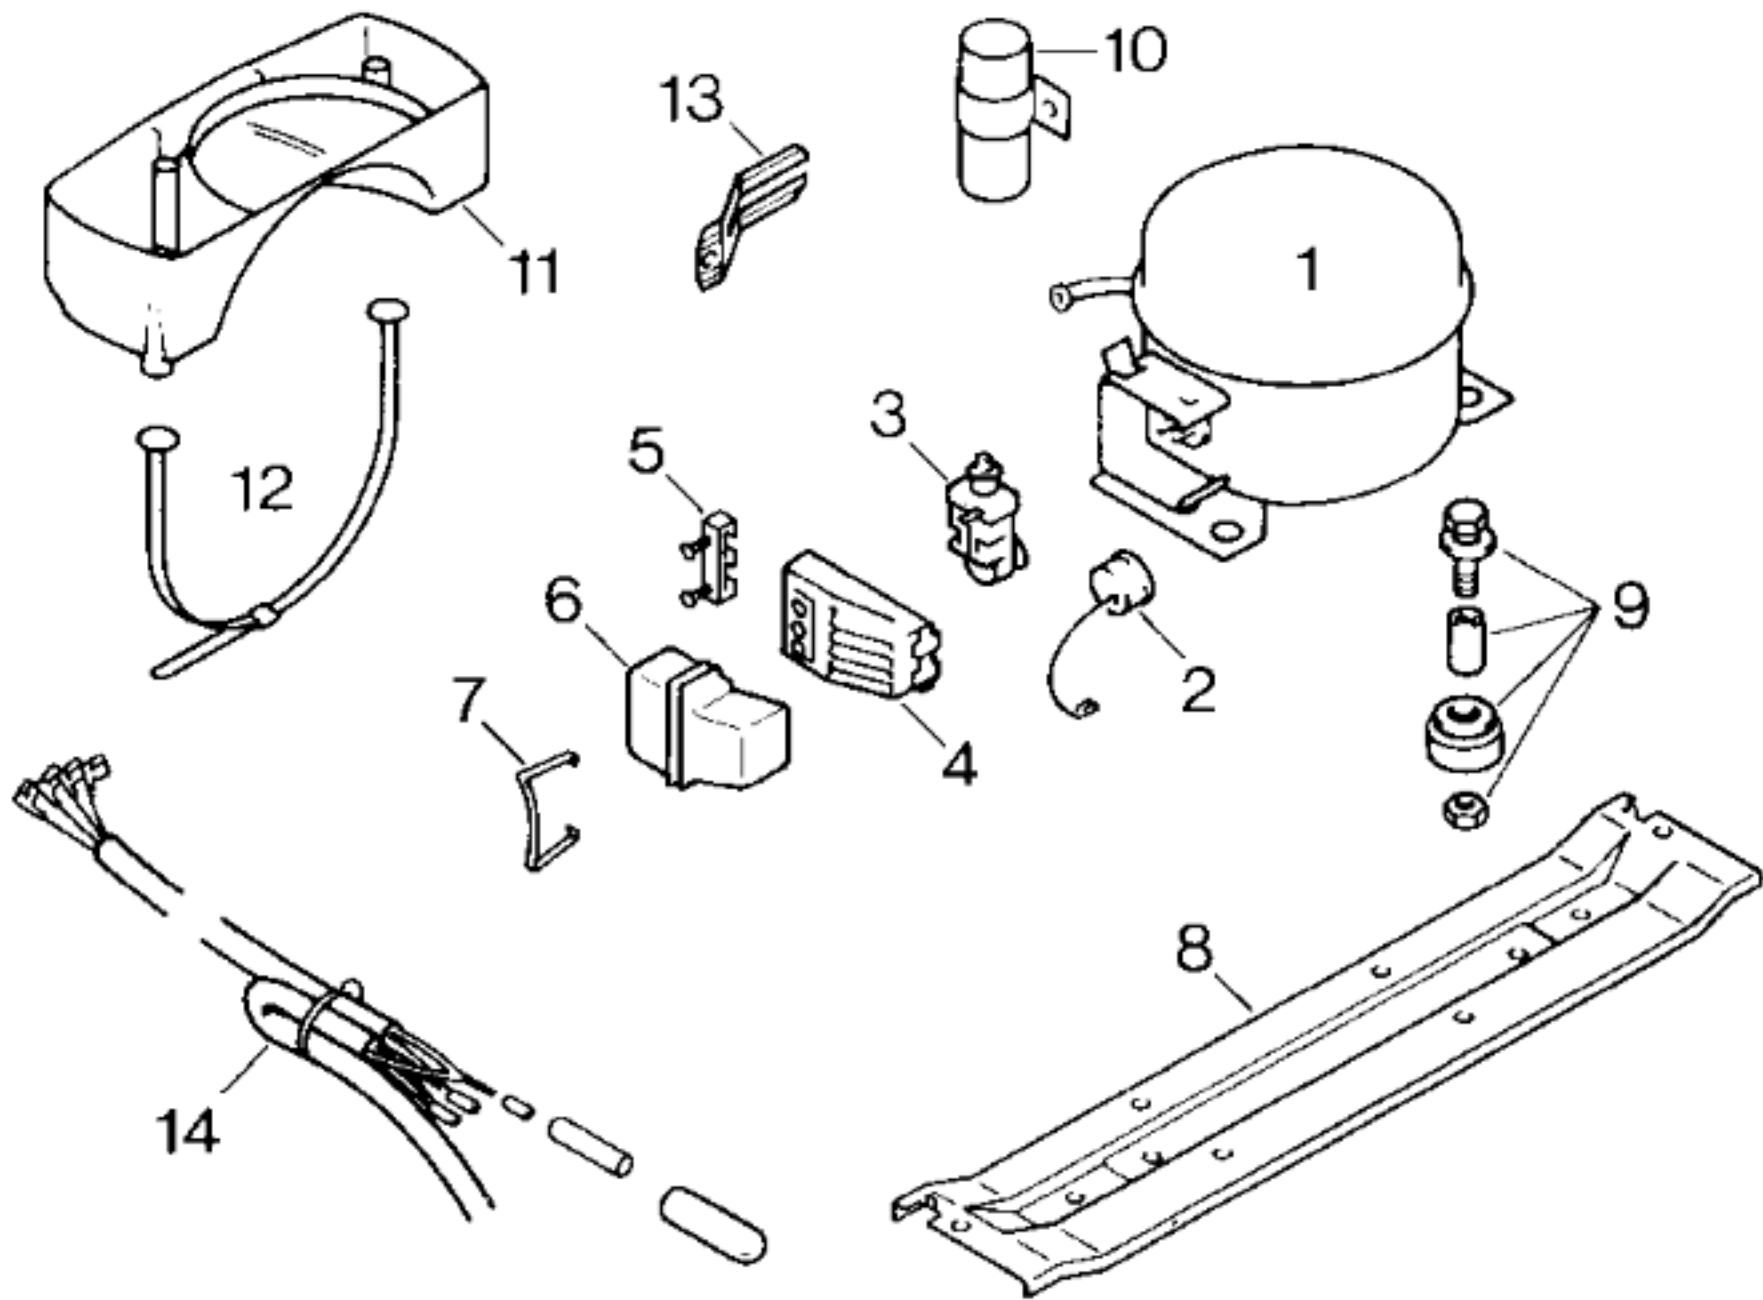

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES					
Verdichter/Compressor/Compresseur		Bosch	Danfoss		
Typ/Type		V 792	TL 4 A		
Förderleistung/Delivery/Débit		l/h	695		
Anlaufstrom/Starting current/Cour. de démarrage		A	7,8		
Widerstand/Resistance/Résistance	Ha/main/prin.	Ω	23,8		
	Hi/aux	Ω	19,7		
Temp.-Regler/Thermostat		Bosch			
Typ/Type		1 707 212 425			
Reglerstellung/Position		kalt warm			
Schaltwerte/Switching values/ Valeurs de commutation	„ein“	- 15	- 4		
	„aus“	- 27	- 12		
	(„abtauen“ od.)	+ 6	+ 6		
Füllmenge/Fill.quantity/Charge		R12	g	105	
Anschlußwert/Conn.load/Puiss. connectée		W	110		
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance		Ω			
	Leistung/Power/Puissance	W			
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance		Ω			
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance		Ω			
	Spannung/Voltage/Tension	V			

Pos.	EU 1	EU 1		
	Danfoss	Bosch		
1	13 1064/45			
2		07 2115/18		
3	02 0108/27	07 1804/18		
4		04 9757/02		
5	02 1361/04			
6	05 1413/05	04 9758/02		
7				
8	*11 1839/07	19 2409/05		
9	*05 0166/05/4			
10				
11				
12				
13	*04 1568/01/2			
14	*05 1226/08			

*) Bei Ersatz des Bosch-Verdichters mitbestellen
To be ordered when replacing the Bosch compressor
A commander lors du remplacement du compresseur Bosch