



SIEMENS

KÜHL-GEFRIERKOMBINATION KG 2856, KG 2857

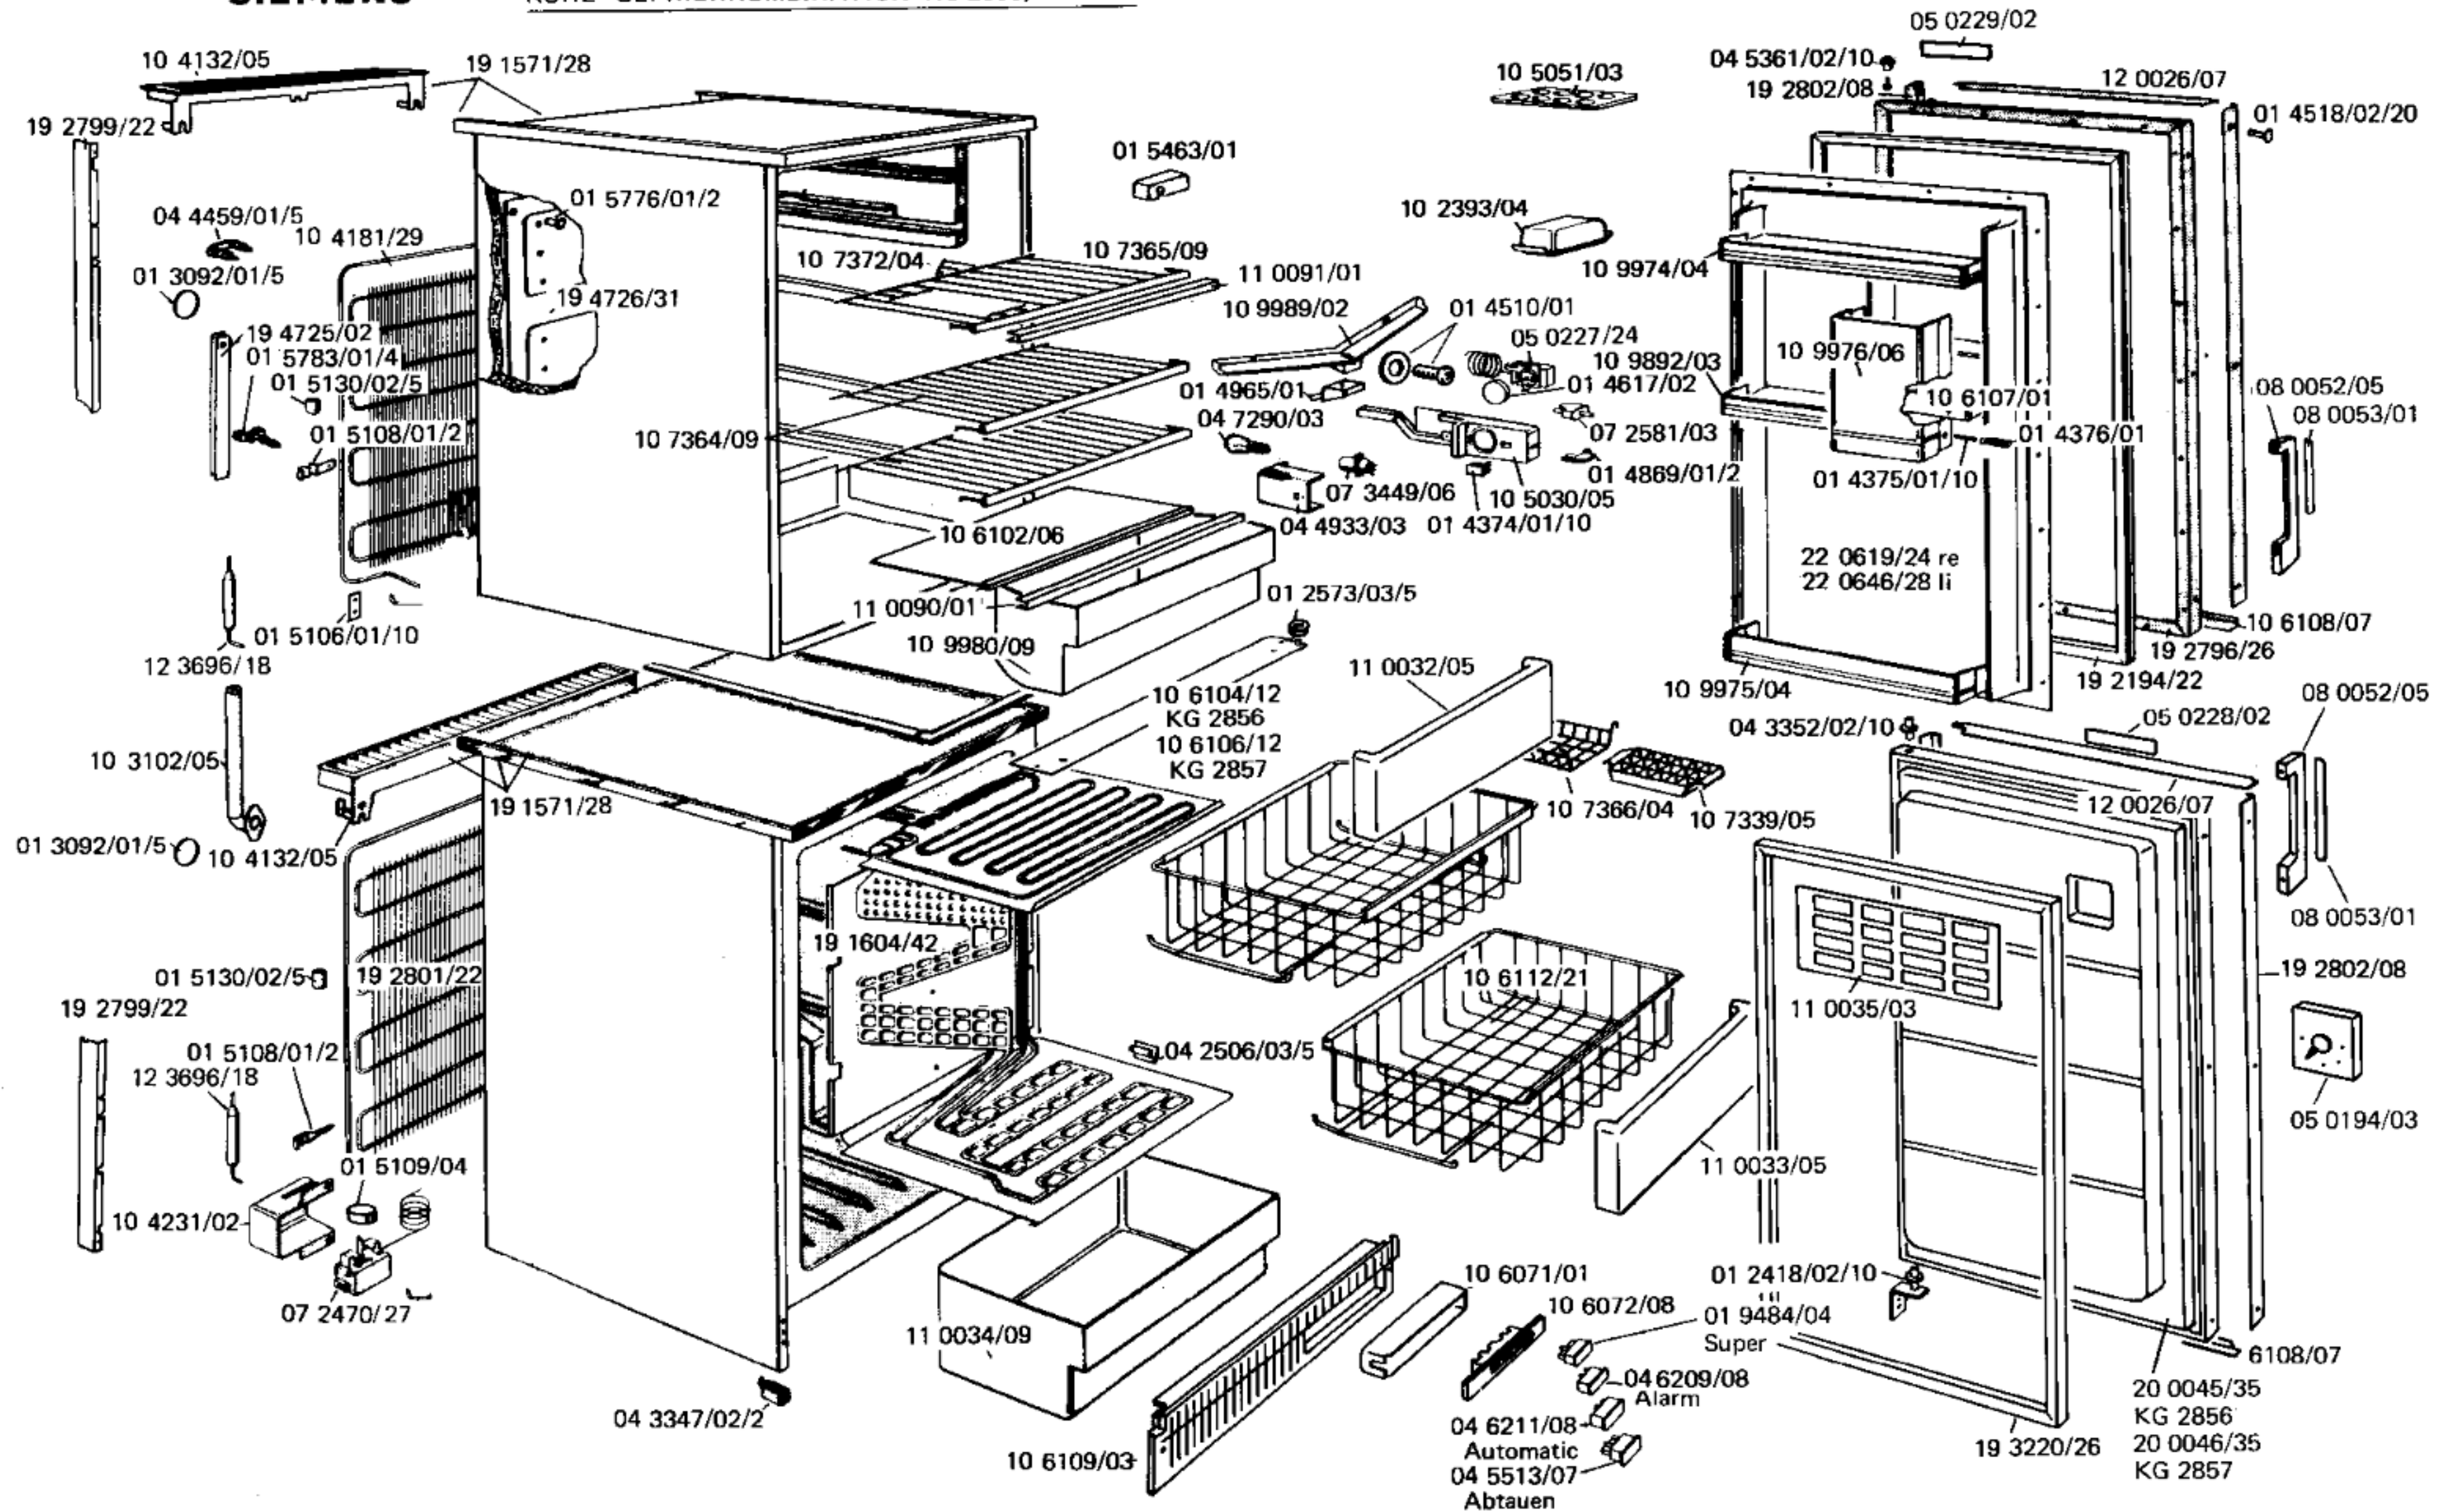

250388-2/1

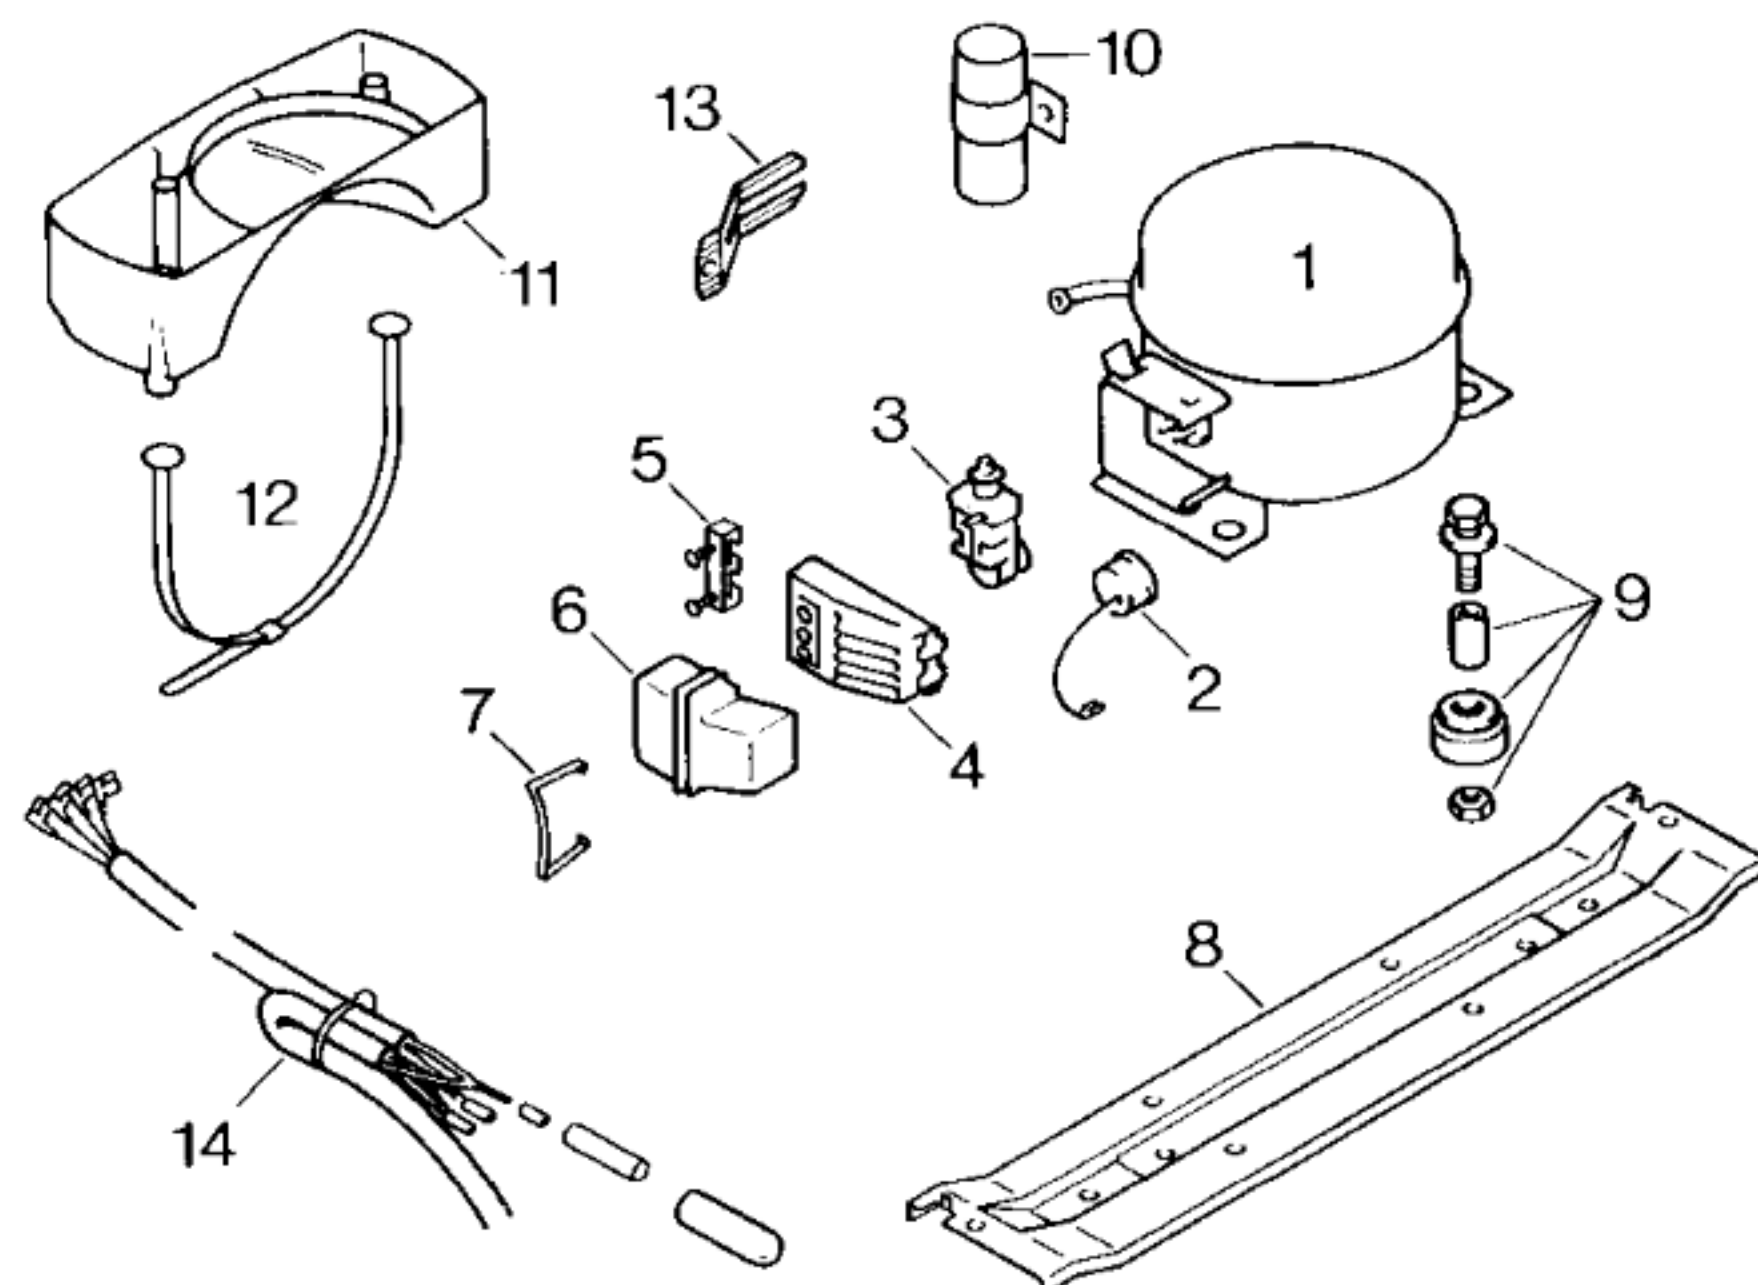

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur	KS	GS	KS/GS	
Typ/Type	Bosch	Bosch	Danfoss	
Förderleistung/Delivery/Débit	V 612	V 792	702	
Anlaufstrom/Starting current/Cour. de démarrage	6,4	9,4	7,8	
Widerstand/Resistance/Résistance	28,0	18,0	23,8	
Hi/aux	39,0	24,0	17,0	
Temp.-Regler/Thermostat	M + J / Bosch	M + J / Bosch		
Typ/Type	kalt	warm	kalt	warm
Reglerstellung/Position	+ 4	+ 4	- 23	- 17
Schaltwerte/Switching values/	- 24	- 10	- 31	- 24
Valeurs de commutation	„ein“	„aus“	- 18	- 13
(„abtauen“ od.)	„alarm“			
Füllmenge/Fill.quantity/Charge	R12	g	80	185
Anschlußwert/Conn.load/Puiss. connectée	W		200	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance	Ω			
Leistung/Power/Puissance	W			
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance	Ω			
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance	Ω			
Spannung/Voltage/Tension	V			

Pos.	KS	GS	KS/GS
	Bosch	Bosch	Danfoss
1			13 1064/45
2	07 1691/18	07 2115/18	
3	07 1692/18	07 1804/18	02 0108/27
4	04 9757/02		
5			
6	04 9758/02		05 1413/06
7			
8			*11 1493/03
9	01 4895/02		*05 0166/05
10			
11	10 6693/03		*11 1243/01
12			
13			*04 1568/01/2
14			*05 1226/08

*) Bei Ersatz des Bosch-Verdichters mitbestellen
To be ordered when replacing the Bosch compressor
A commander lors du remplacement du compresseur Bosch