



KÜHLAUTOMAT KE 1660-D1, KE 1664-D5
KE 1661-D2, KE 1665-D6
KE 1662-D3, KE 1663-D4,

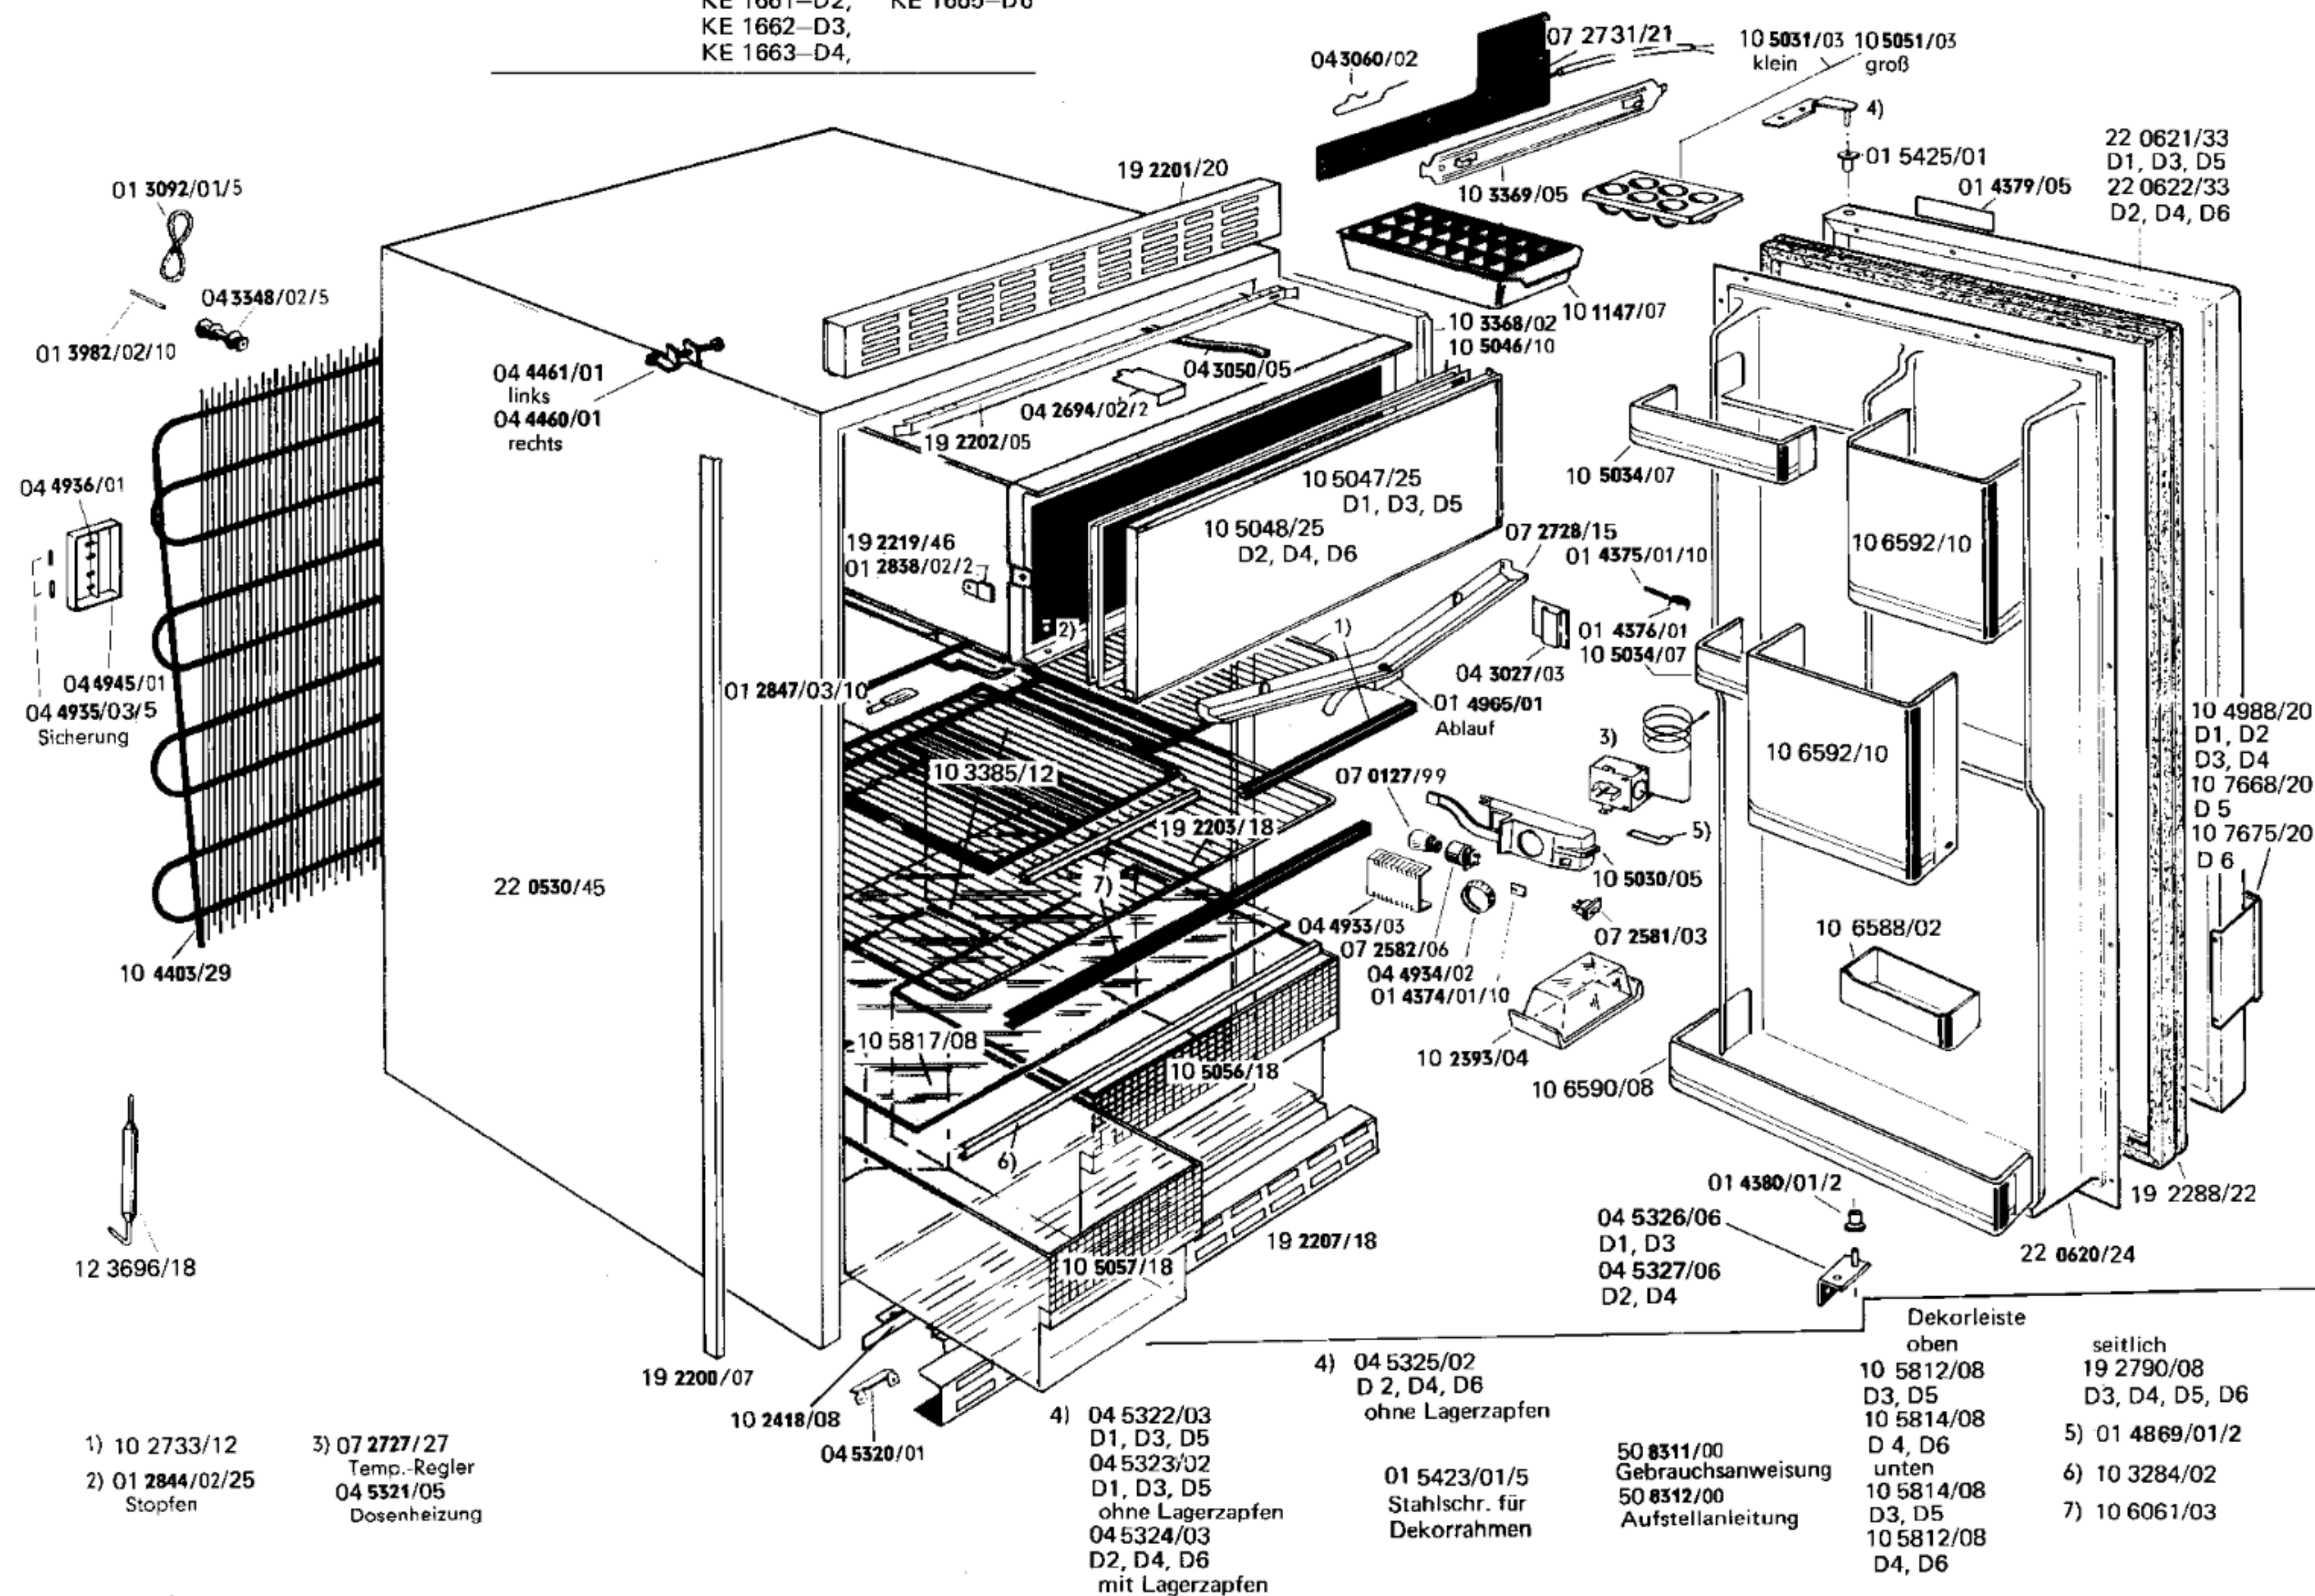

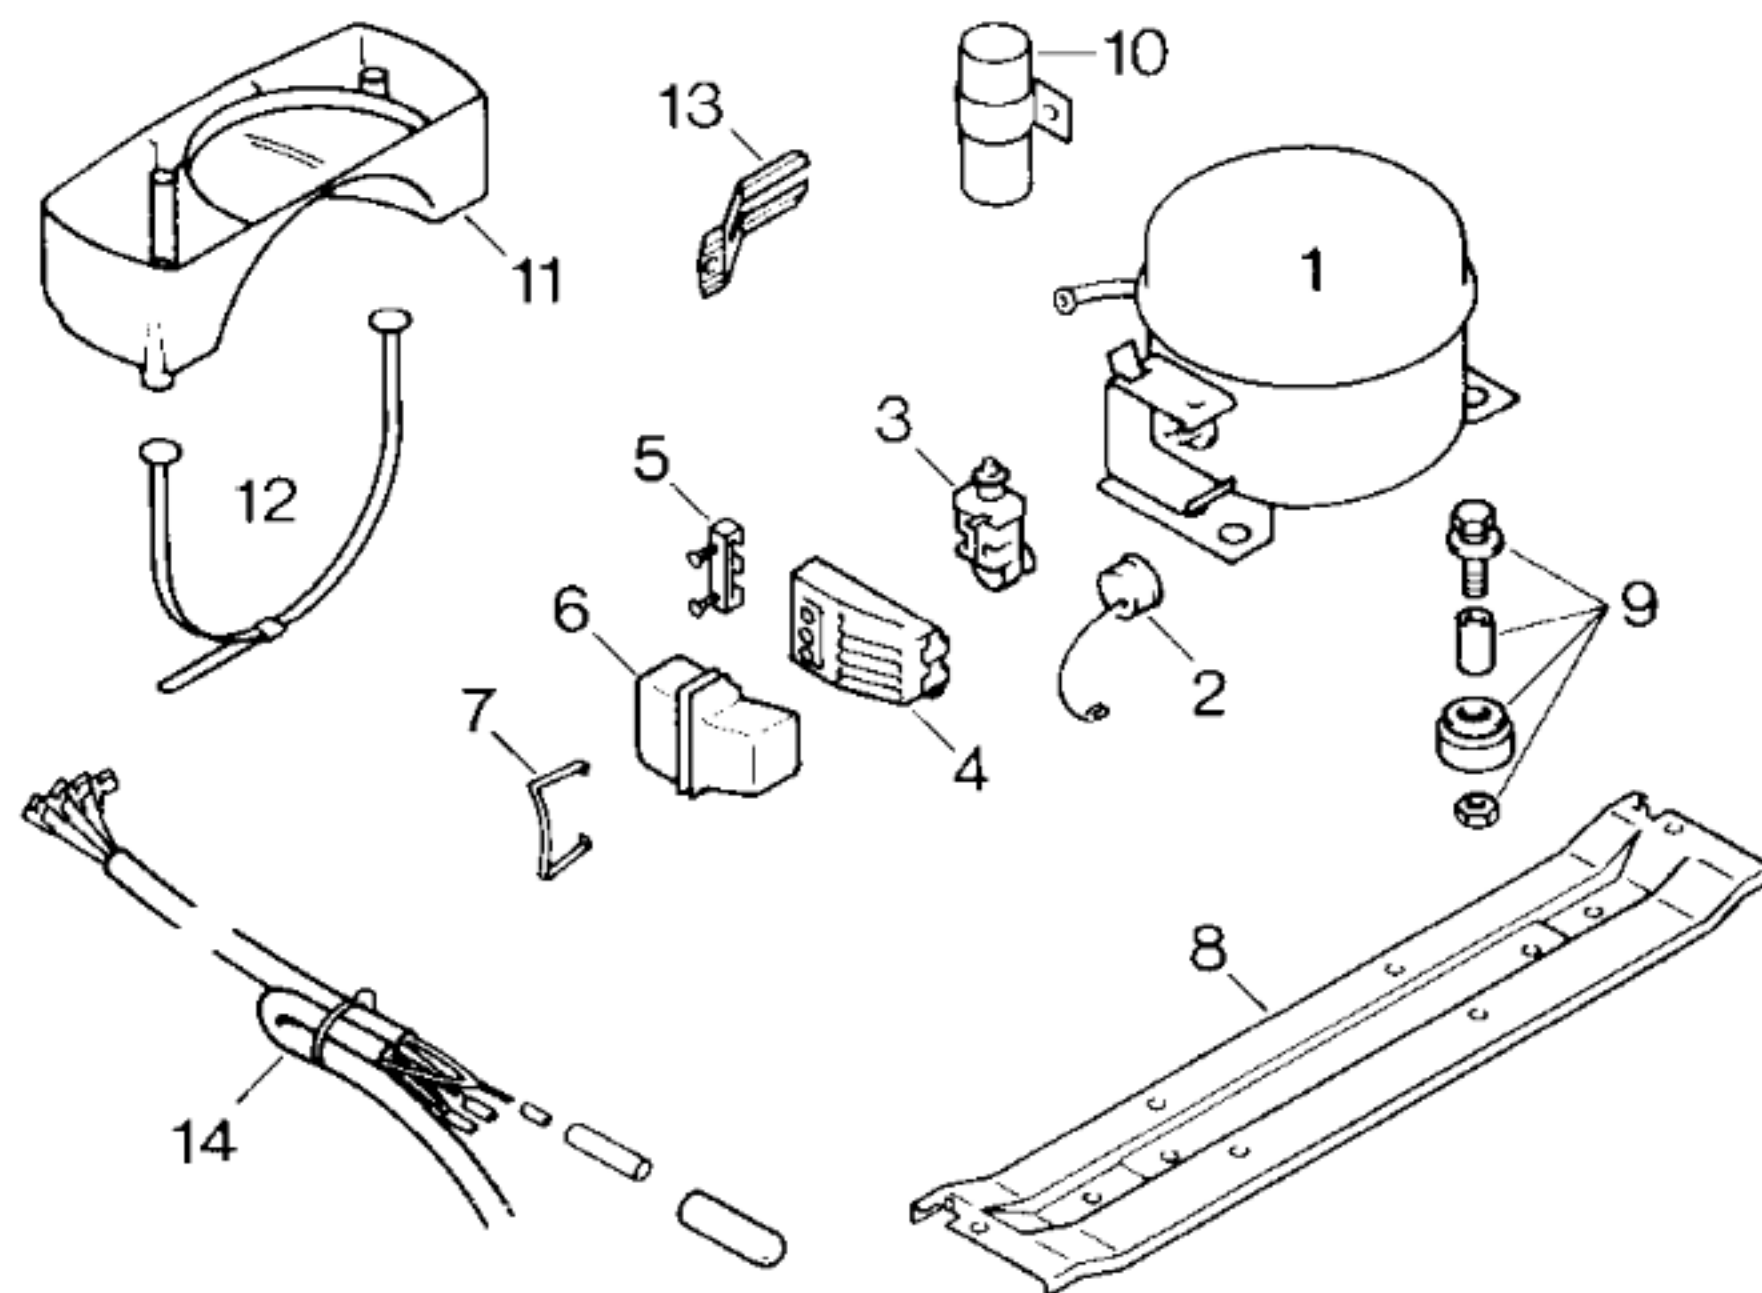

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Bosch	Danfoss		
Typ/Type		V 1040	TL 5 A		
Förderleistung/Delivery/Débit		l/h	1040	920	
Anlaufstrom/Starting current/Cour. de démarrage		A	9,5	9,0	
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	17,6	15,7	
		Hi/aux Ω	28,7	18,8	
Temp.-Regler/Thermostat		Ranco			
Typ/Type		A 59			
Reglerstellung/Position		kalt warm			
Schaltwerte/Switching values/		+ 4 + 4			
Valeurs de commutation		- 29 - 20			
		(„abtauen“ od.) „alarm“			
Füllmenge/Fill.quantity/Charge		R12 g	130		
Anschlußwert/Conn.load/Puiss. connectée		W	110		
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance		Ω	2120		
Leistung/Power/Puissance		W	14,5		
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance		Ω			
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance		Ω			
Spannung/Voltage/Tension		V			

Pos.	D1 - D6	D1 - D6		
	Bosch	Danfoss		
1		14 0065/45		
2	07 2131/18			
3	07 3899/09	02 0108/27		
4	04 9757/02			
5		02 1361/04		
6	04 9758/02	05 1413/06		
7				
8		*11 1839/07		
9		*05 0166/05/4		
10				
11	10 6693/03	*11 1243/01		
12				
13		*04 1568/01/2		
14		*05 1226/08		

*) Bei Ersatz des Bosch-Verdichters mitbestellen
To be ordered when replacing the Bosch compressor
A commander lors du remplacement du compresseur Bosch