




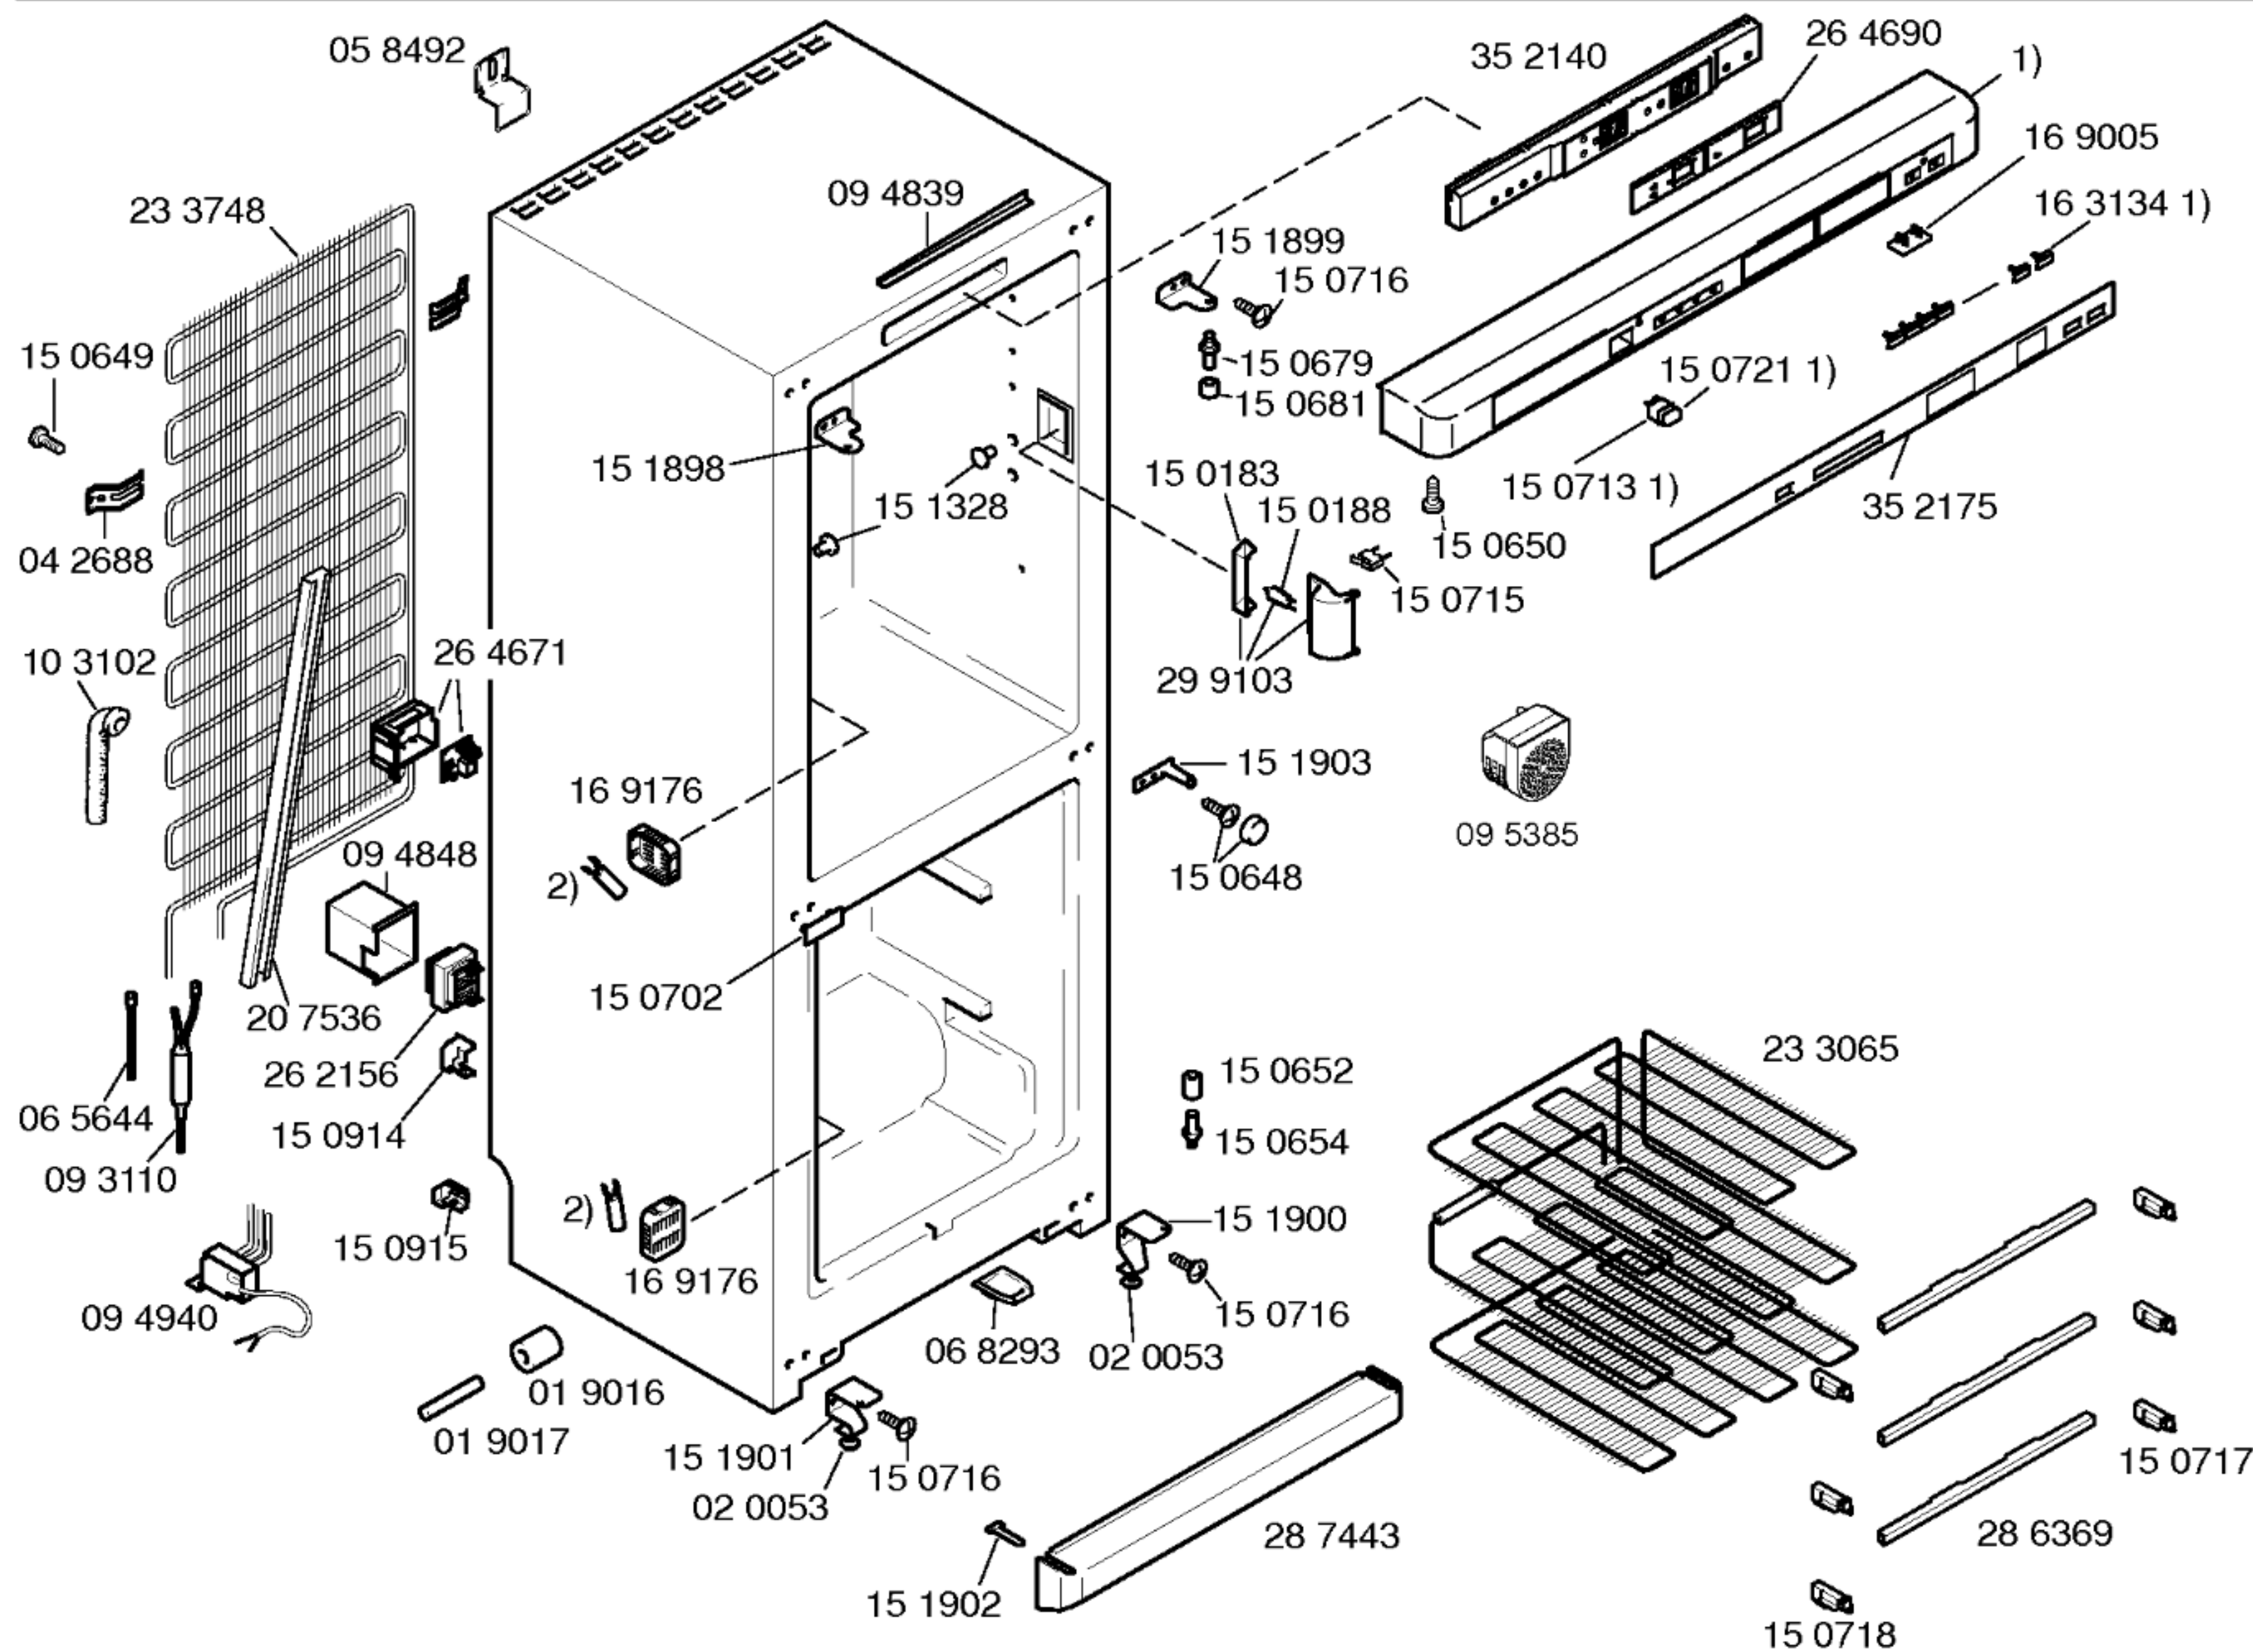

Gebrauchsanweisung
52 1816
(GR,TR)
Montageanleitung
51 6997
(D,G,I,F,NL,DK,N,SF,P)

1) 35 2153
Blende kompl.
2) 16 8766
Rep. Satz

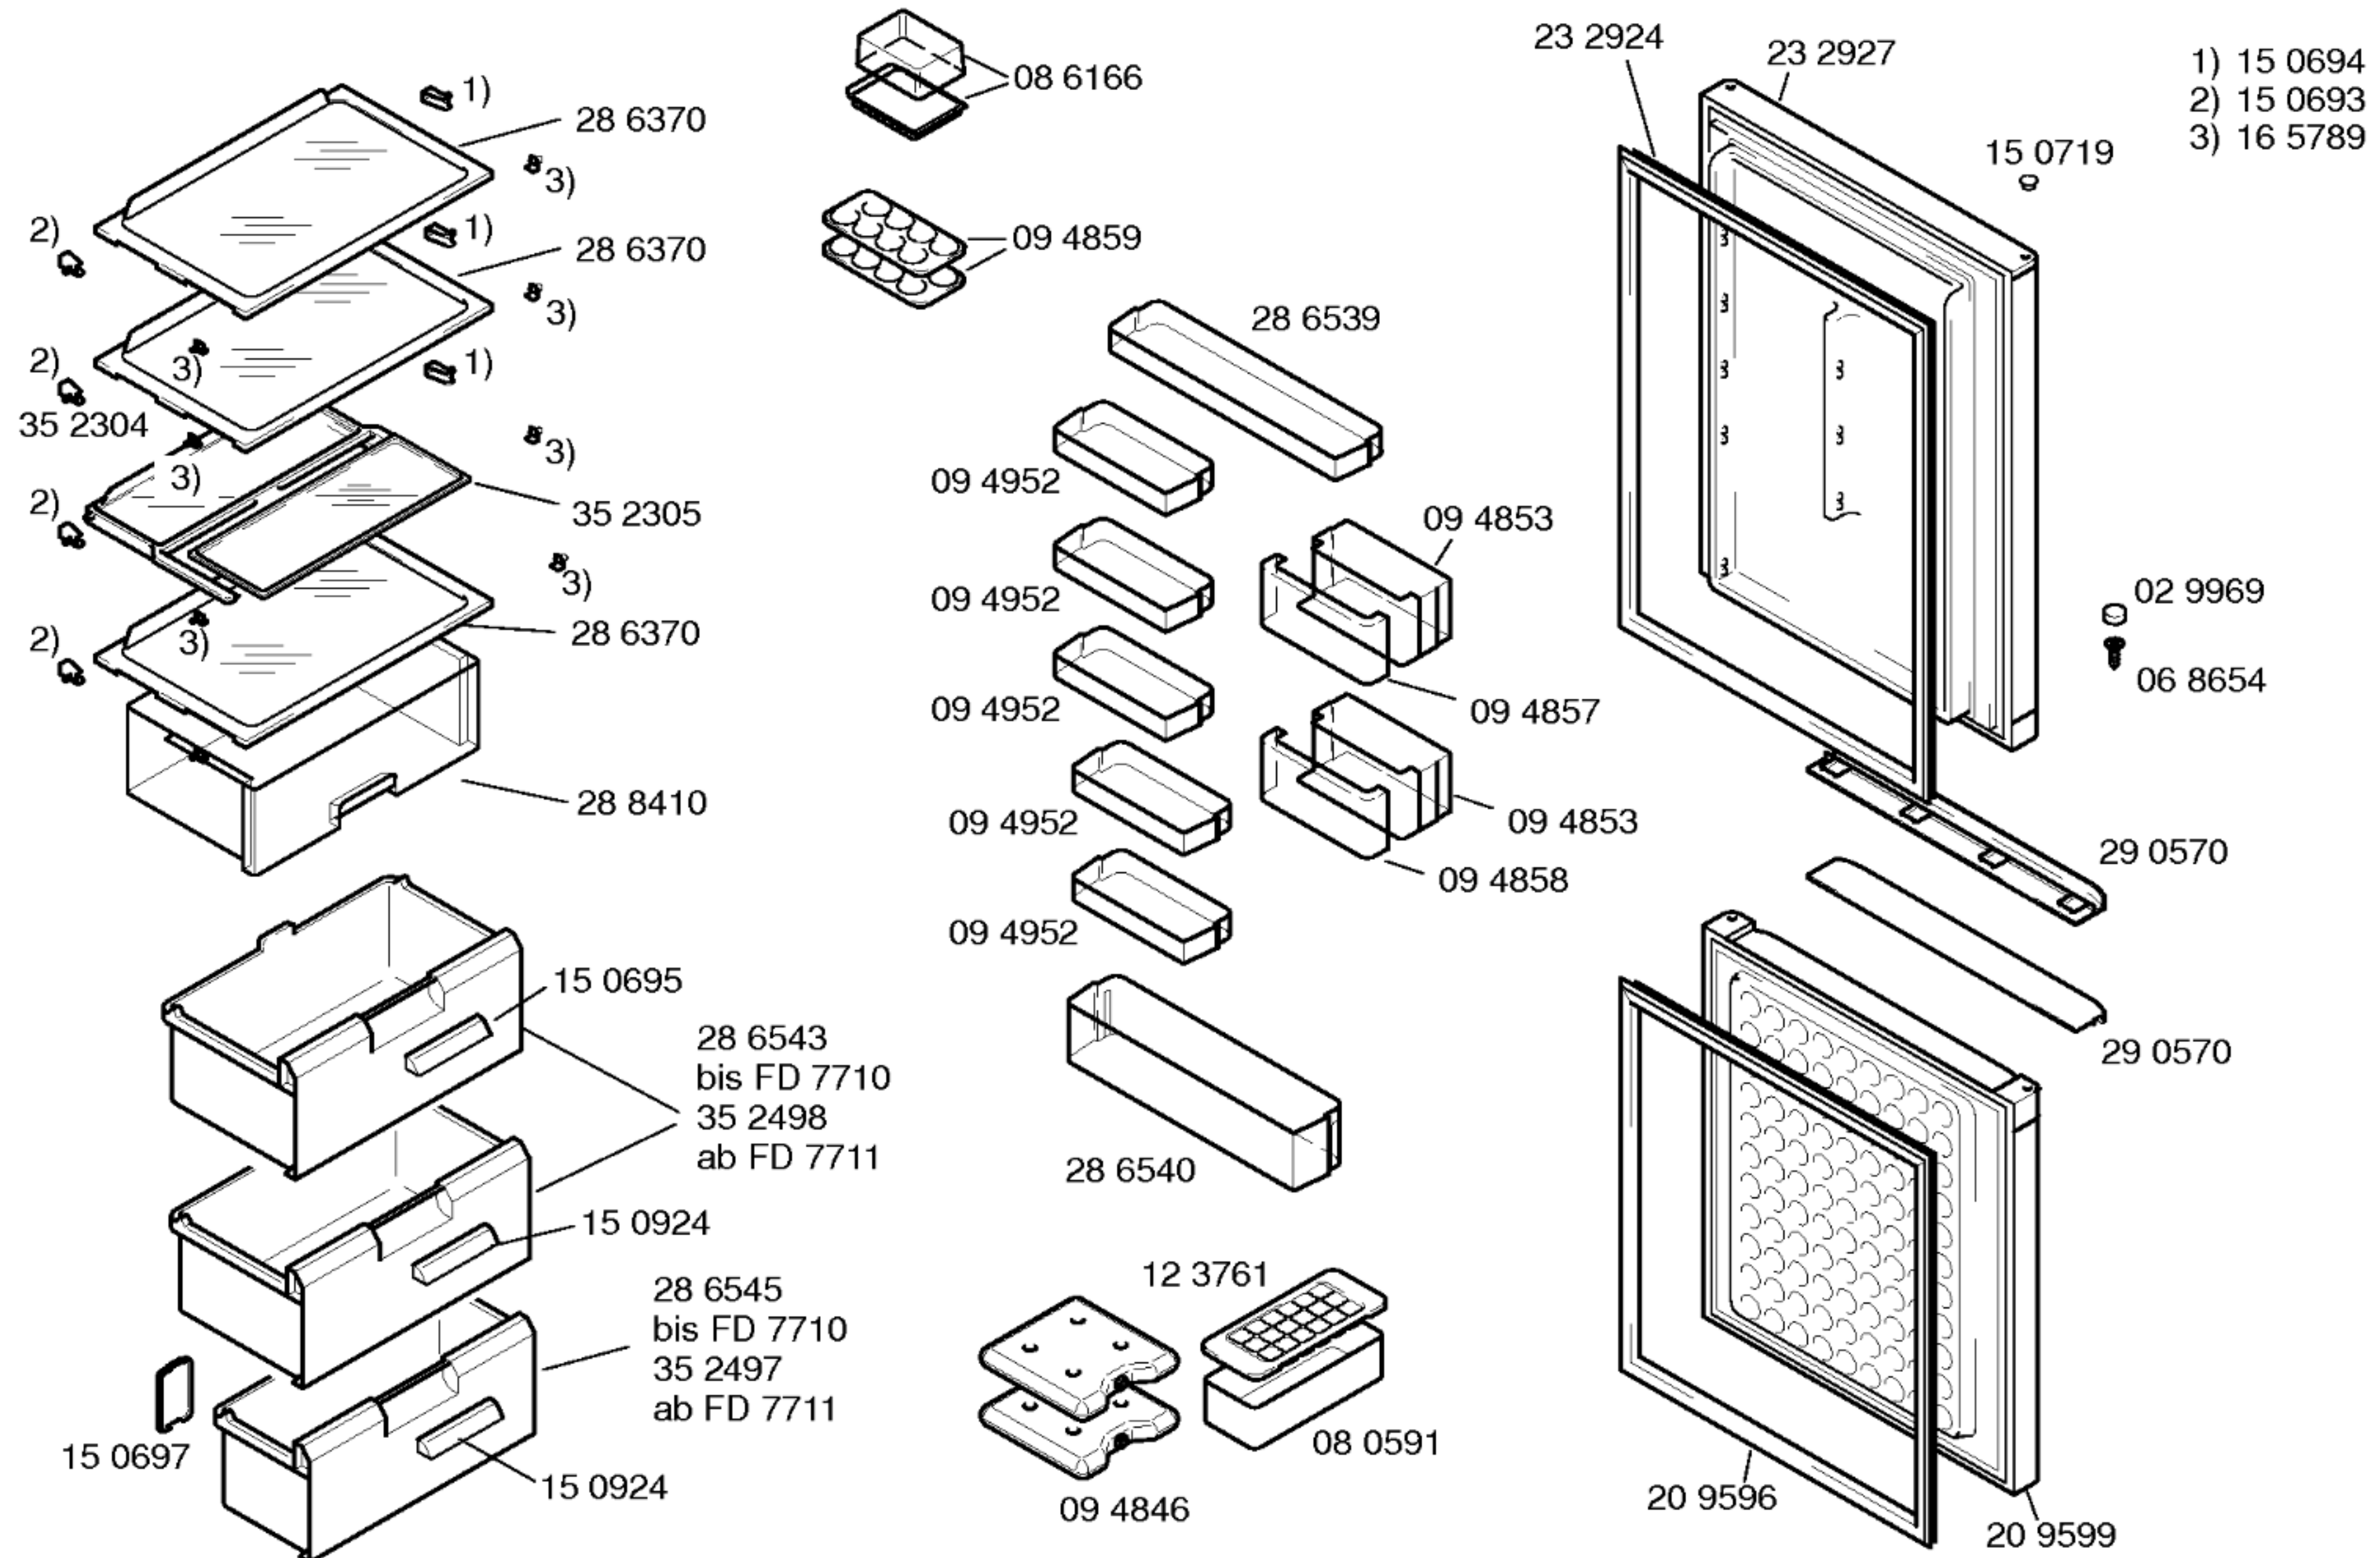

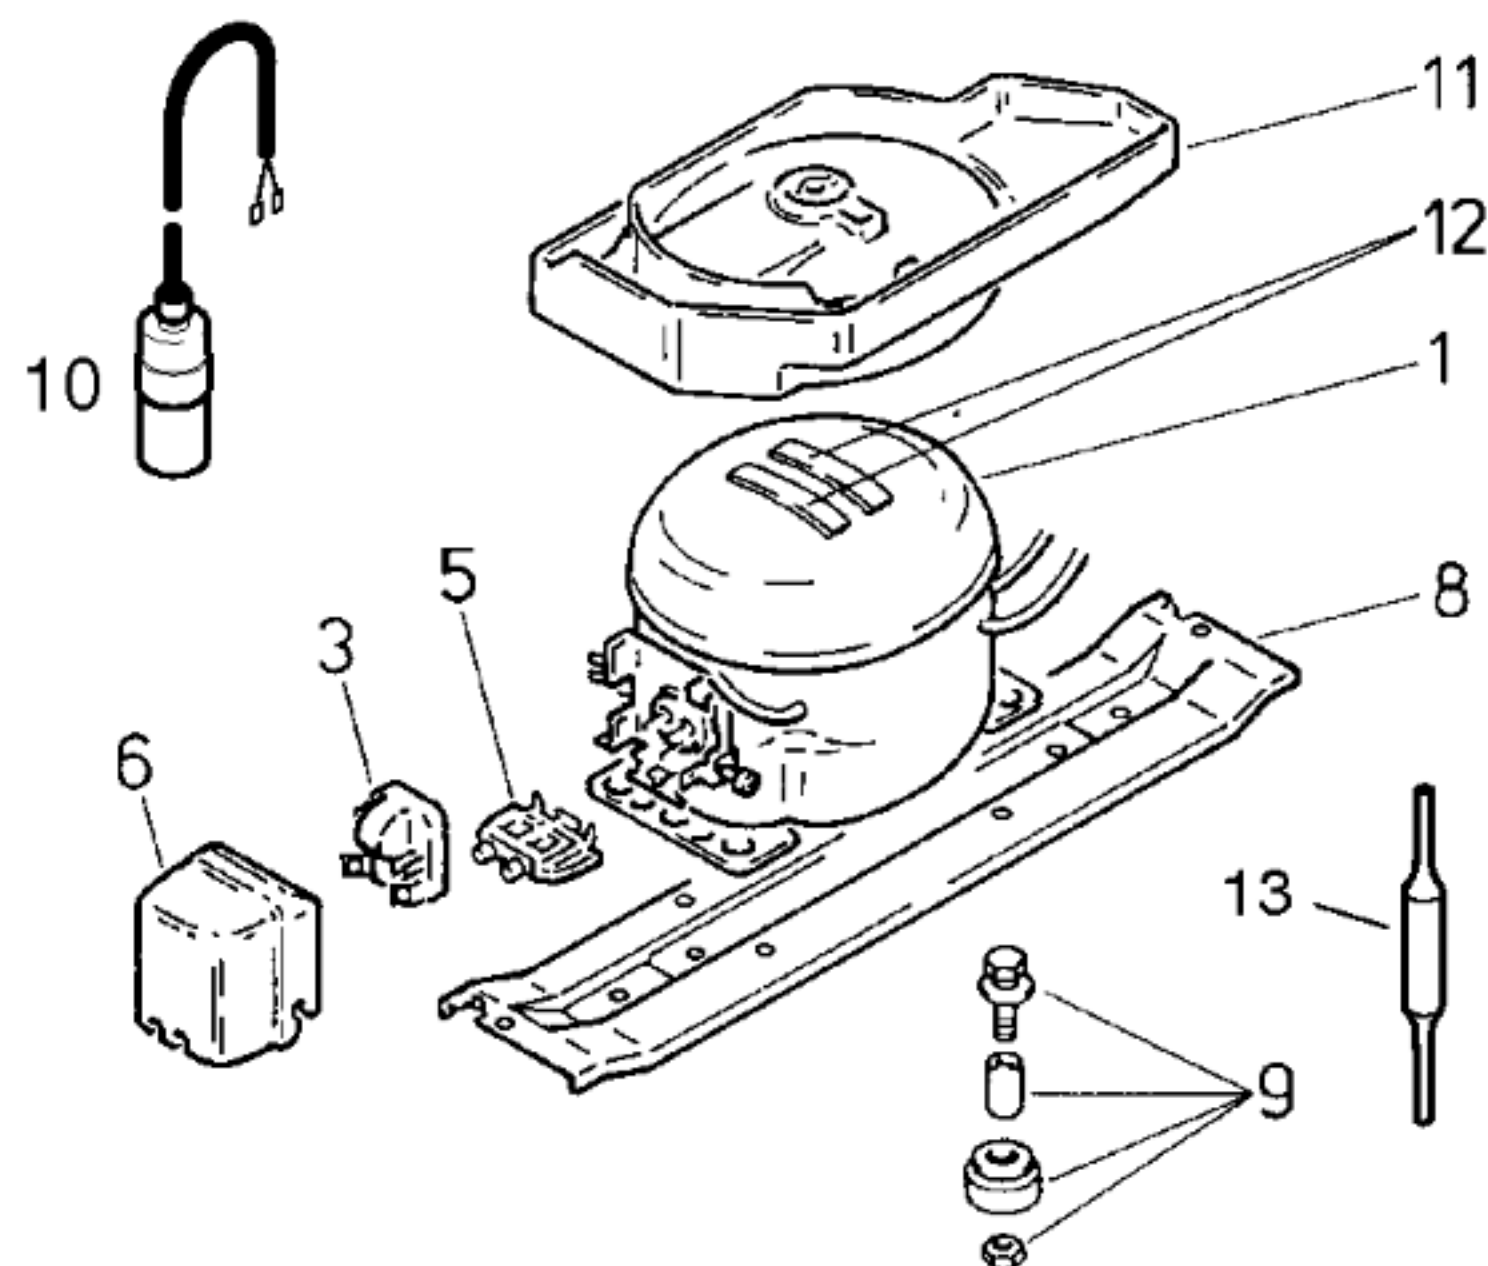

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Danfoss	Matsushita	Danfoss	Danfoss	
Typ/Type		NLE 11 K	DA 110 E	NLE 15 K	NLE 13 K	
Förderleistung/Delivery/Débit		l/h	2007	1980	2637	2138
Anlaufstrom/Starting current/Cour. de démarrage		A	10,7	8,7	11,4	11,2
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	12,9	12,0	10,7	12,9
		Hi/aux Ω	18,0	28,7	13,0	18,0
Temp.-Regler/Thermostat						
Typ/Type			°C	k Ω	°C	k Ω
Reglerstellung/Position			+10	9,95 $\pm 0,18$	-18	43,31 $\pm 1,10$
Schaltwerte/Switching values/		„ein“ °C	+5	12,70 $\pm 0,18$	-22	54,66 $\pm 1,59$
Valeurs de commutation		„aus“	0	16,33 $\pm 0,16$	-26	69,42 $\pm 2,29$
		(„abtauen“ od.)				
Füllmenge/Fill.quantity/Charge		R600a	g	*		
Anschlußwert/Conn.load/Puiss. connectée		W	120			
Heizung/Heater/Chauffage						
Widerstand/Resistance/Résistance		Ω				
Leistung/Power/Puissance		W				
Ventilator/Blower/Ventilateur						
Widerstand/Resistance/Résistance		Ω				
Magnetventil/Magnetic valve/Electrovanne						
Widerstand/Resistance/Résistance		Ω	1650			
Spannung/Voltage/Tension		V	220			

Pos.	V01	V02	V03		
	Danfoss	Danfoss	Danfoss		
	NLE 15 K	DA 125 E	NLE 13 K		
1	14 1311	14 1556	14 1591		
2					
3	15 1055	05 8506	15 1055		
4					
5	15 0760	16 2549	15 0760		
6	15 1072	05 8458	15 1072		
7					
8	28 7447	28 7447	28 7447		
9	05 0166	05 0166	05 0166		
10	15 2222	15 2222	15 2222		
11	09 6212	09 6212	09 6212		
12	05 6008	05 6008	05 6008		
13					

* siehe Typenschild