



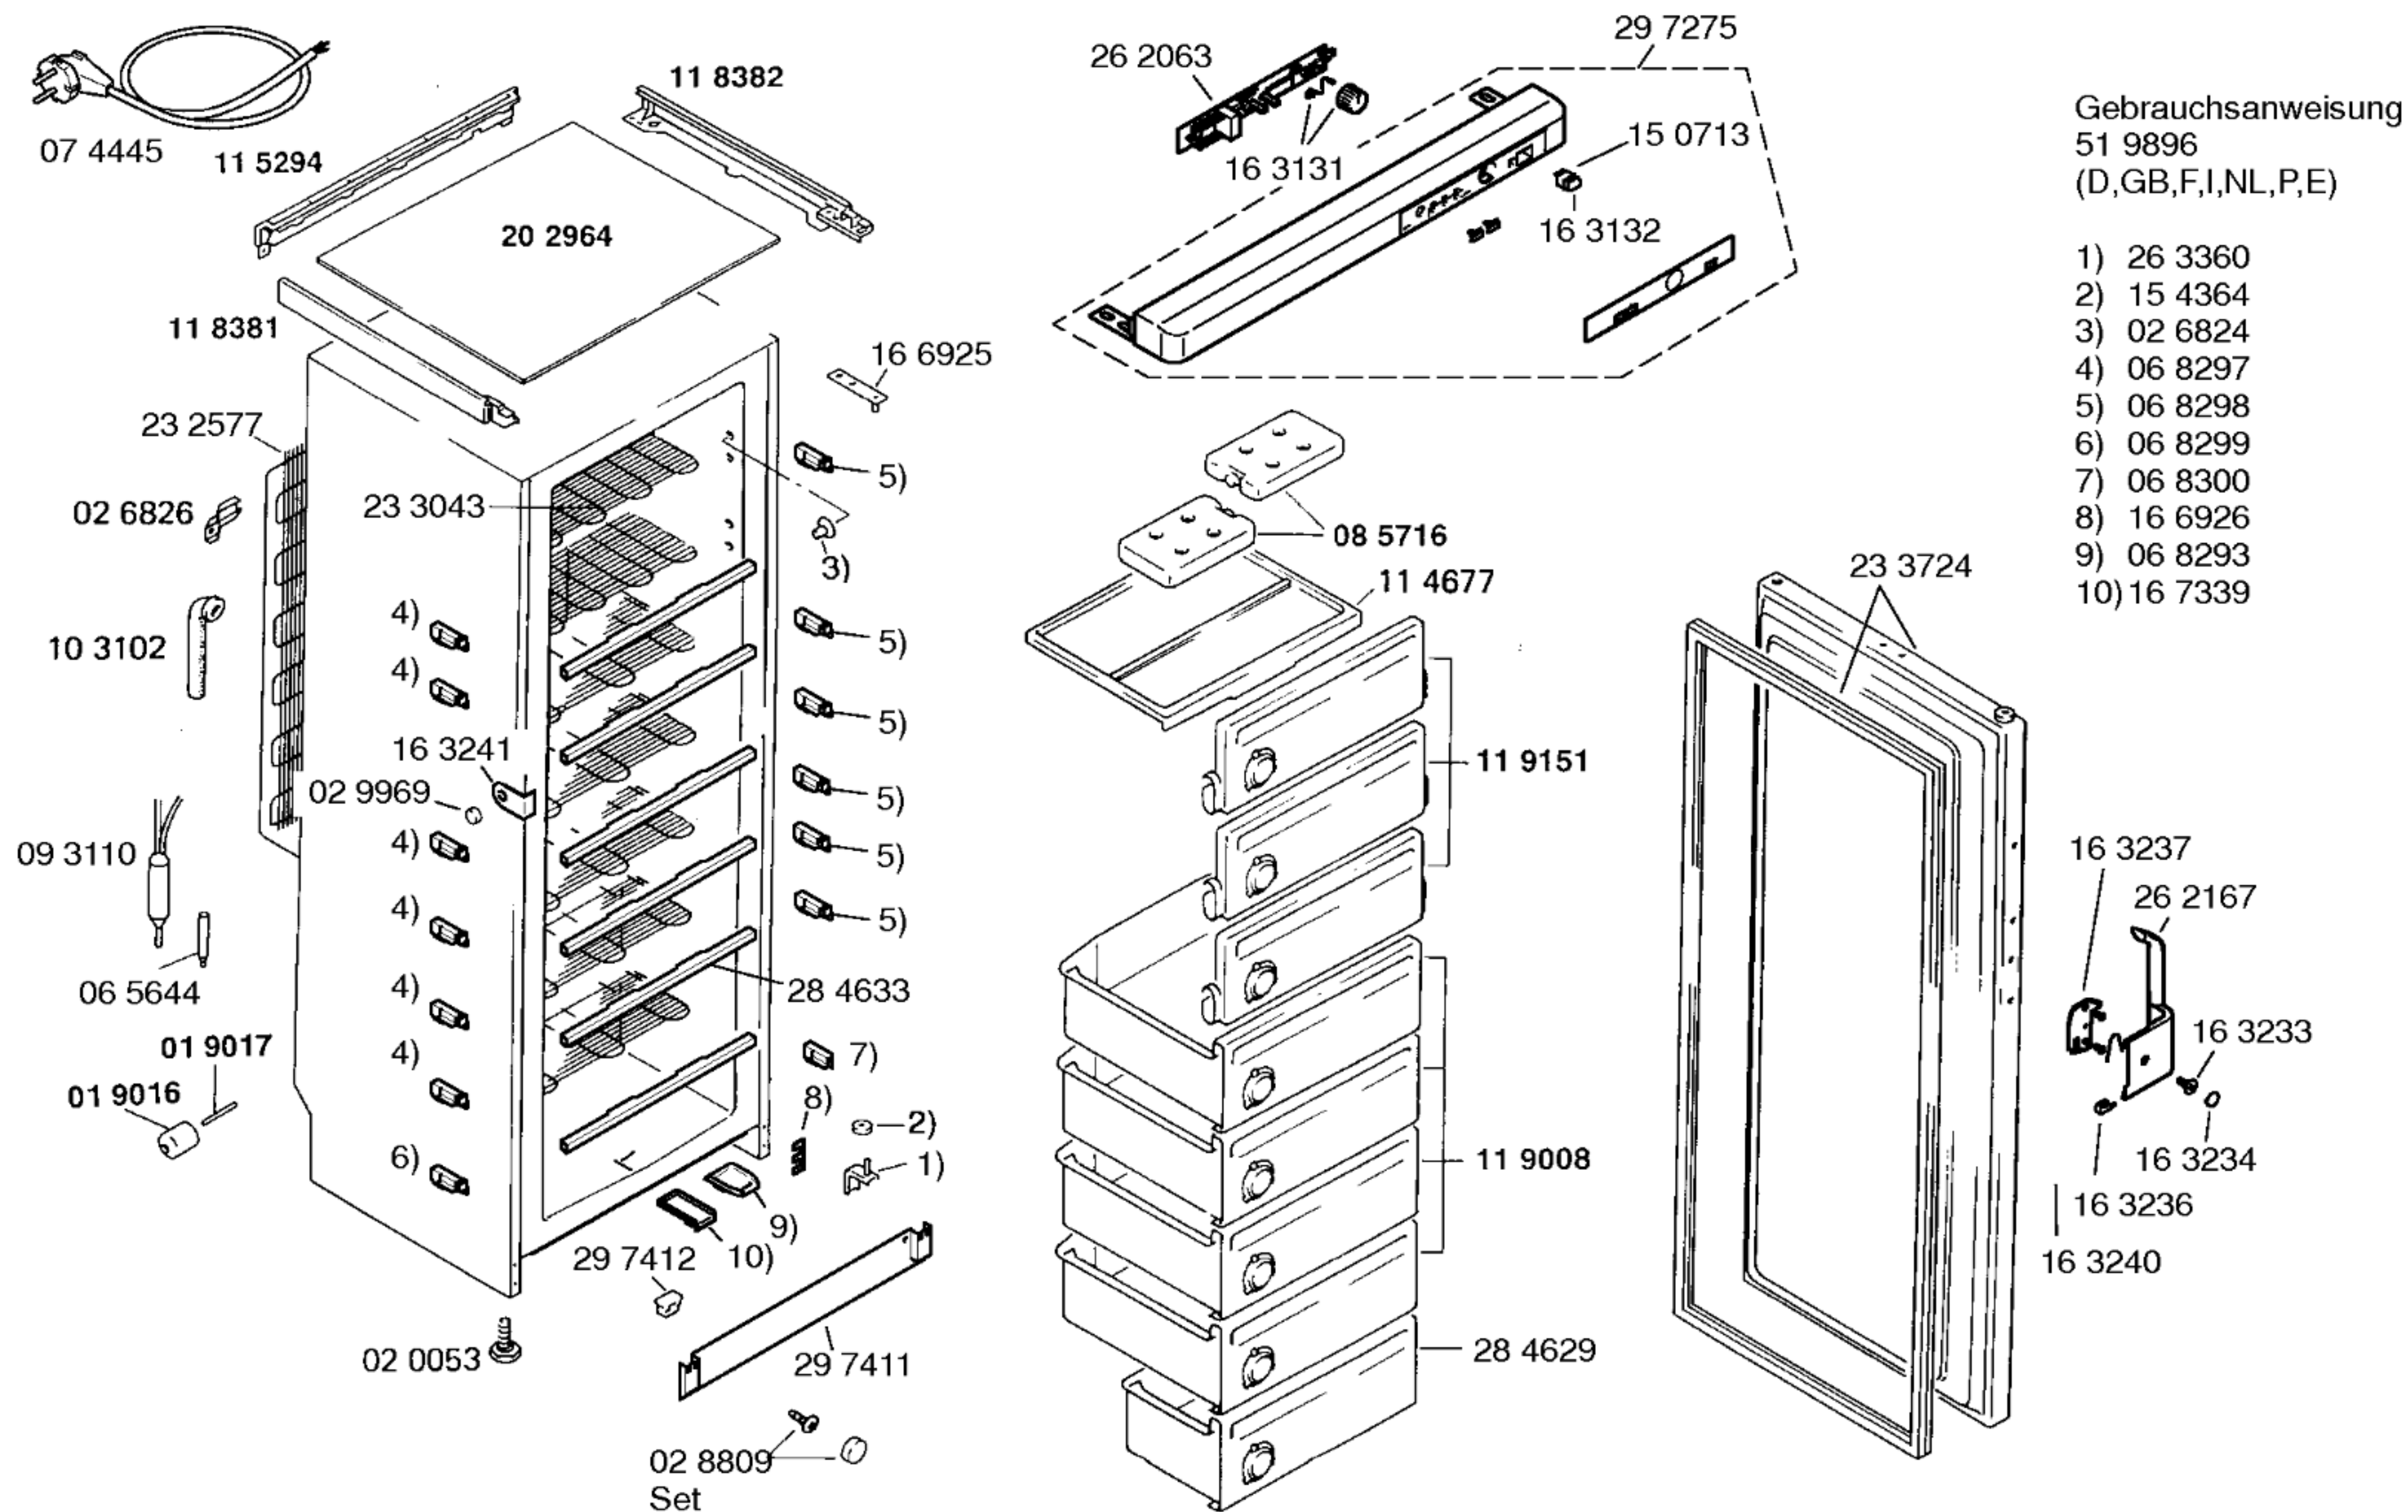

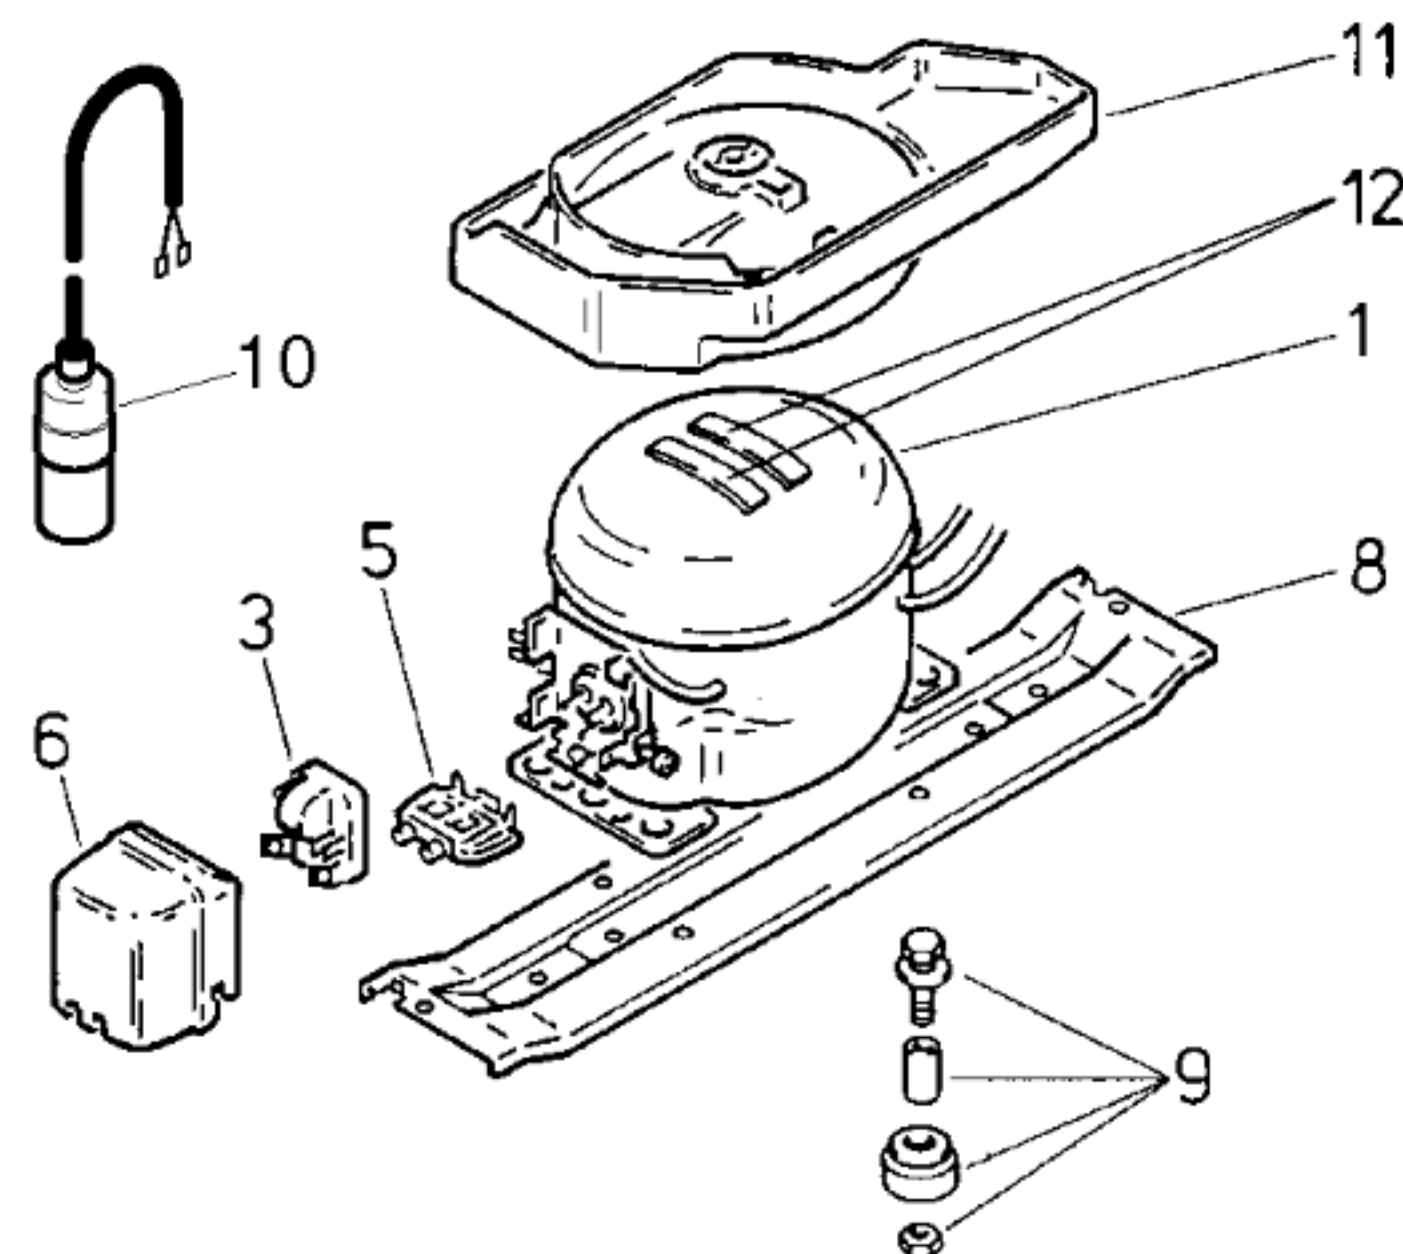

Pos.			
	Matsushita		
	DA 12 SE		
1	14 1556		
2			
3	03 2035		
4			
5	16 2549		
6	05 8458		
7			
8	11 1567		
9			
10			
11			
12			

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES							
Verdichter/Compressor/Compresseur		Matsushita					
Typ/Type		DA 12 SE					
Förderleistung/Delivery/Débit		l/h	2250				
Anlaufstrom/Starting current/Cour de démarrage		A	8,7				
Widerstand/Resistance/Résistance		Ha/main/prin	Ω	12,0			
		Hi/aux	Ω	28,7			
Temp.–Regler/Thermostat		Elektronisch					
Solltemperatur–Einstellung		°C	EIN AUS				
		"warm"	–14 –15				
		"kalt"	–22 –23				
		"alarm"	–10 –14				
Füllmenge/Fill.quantity/Charge		R600a	siehe Typenschild				
Anschlußwert/Conn.load/Puiss. connectée		W	150				
Heizung/Heater/Chauffage							
Widerstand/Resistance/Résistance		Ω					
Leistung/Power/Puissance		W					
Ventilator/Blower/Ventilateur							
Widerstand/Resistance/Résistance		Ω					
Widerstand NTC–Fühler		°C	kΩ	°C	kΩ	°C	kΩ
		–1	17,3	–15	36,5	–20	48,6
		–9	26,2	–16	38,8	–23	58,1
		–14	34,5	–19	45,9	–24	61,6
Magnetventil/Magnetic valve/Electrovanne							
Widerstand/Resistance/Résistance		Ω					
Spannung/Voltage/Tension		V					